

PATTERN DIGEST 2018

PASSENGER CAR TYRES

4x4 [4WD] TYRES

LIGHT TRUCK TYRES

TRUCK and BUS TYRES

OFF-THE-ROAD TYRES

INDUSTRIAL TYRES





SPORT

DIREZZA ZIII

STEEL BELTED RADIAL

DIREZZA Z3 is a High-grip radial tyre for a broad range of users aiming to set a new best lap.

Pyrogenic has evolved with adoption of new compound. Enhanced maximum grip.

Uniform contact performance when turning realized with adoption of new profile.

Enhanced grip and control. Stable lap time realized even under long-run.



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
285/30R18	93	W		BLK	TL	○	631	290	10.0	9.5 - 10.5	7.0
295/30R18	94	W		BLK	TL	○	637	301	10.5	10.0 - 11.0	7.1
255/35R18	90	W		BLK	TL	○	637	260	9.0	8.5 - 10.0	6.7
265/35R18	93	W		BLK	TL	○	645	271	9.5	9.0 - 10.5	6.8
275/35R18	95	W		BLK	TL	○	651	278	9.5	9.0 - 11.0	6.9
275/35R19	96	W		BLK	TL	○	677	278	9.5	9.0 - 11.0	6.9
215/40R17	83	W		BLK	TL	○	606	218	7.5	7.0 - 8.5	6.4
235/40R17	90	W		BLK	TL	○	622	241	8.5	8.0 - 9.5	6.6
245/40R17	91	W		BLK	TL	○	630	248	8.5	8.0 - 9.5	6.7
255/40R17	94	W		BLK	TL	○	638	260	9.0	8.5 - 10.0	6.8
225/40R18	88	W		BLK	TL	○	639	230	8.0	7.5 - 9.0	6.5
235/40R18	91	W		BLK	TL	○	647	241	8.5	8.0 - 9.5	6.6
245/40R18	93	W		BLK	TL	○	656	248	8.5	8.0 - 9.5	6.7
245/40R19	94	W		BLK	TL	○	681	248	8.5	8.0 - 9.5	6.7
195/45R16	80	W		BLK	TL	○	584	195	6.5	6.0 - 7.5	6.2
205/45R16	83	W		BLK	TL	○	592	206	7.0	6.5 - 7.5	6.3
225/45R16	89	W		BLK	TL	○	610	225	7.5	7.0 - 8.5	6.5
205/45R17	84	W		BLK	TL	○	618	206	7.0	6.5 - 7.5	6.3
215/45R17	87	W		BLK	TL	○	628	213	7.0	7.0 - 8.0	6.4
225/45R17	91	W		BLK	TL	○	636	225	7.5	7.0 - 8.5	6.5
235/45R17	94	W		BLK	TL	○	646	236	8.0	7.5 - 9.0	6.6
225/45R18	91	W		BLK	TL	○	661	225	7.5	7.0 - 8.5	6.5
165/50R15	73	V		BLK	TL	○	549	170	5.0	4.5 - 6.0	6.2
195/50R15	82	V		BLK	TL	○	579	201	6.0	5.5 - 7.0	6.4
205/50R15	86	V		BLK	TL	○	589	214	6.5	5.5 - 7.5	6.5
165/50R16	75	V		BLK	TL	○	574	170	5.0	4.5 - 6.0	6.2
195/50R16	84	V		BLK	TL	○	604	201	6.0	5.5 - 7.0	6.4
205/50R16	87	V		BLK	TL	○	614	214	6.5	5.5 - 7.5	6.5
225/50R16	92	V		BLK	TL	○	634	233	7.0	6.0 - 8.0	6.7
165/55R14	72	V		BLK	TL	○	540	170	5.0	4.5 - 6.0	6.2
165/55R15	75	V		BLK	TL	○	565	170	5.0	4.5 - 6.0	6.2
195/55R15	85	V		BLK	TL	○	597	201	6.0	5.5 - 7.0	6.4
205/55R16	91	V		BLK	TL	○	634	214	6.5	5.5 - 7.5	6.5
175/60R14	79	H		BLK	TL		568	177	5.0	5.0 - 6.0	6.2
185/60R14	82	H		BLK	TL		580	189	5.5	5.0 - 6.5	6.3



SPORT

DIREZZA DZ102

STEEL BELTED RADIAL

Adopts Dunlop's own DRS-II (Digital Rolling System) Sport simulation technology which enables high level performance on dry and wet roads.

Optimizing theory on groove distribution and angle in addition to existing chaos arrangement theory have resulted in "Low Noise Pattern".

**DIREZZA**
DZ102

Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
265/30R19	93	W	○	BLK	TL	○		643	271	9.50	9.00 - 10.00	7.8
275/30R19	96	W	○	BLK	TL	○	○	649	278	9.50	9.00 - 10.00	7.8
215/35R18	84	W	○	BLK	TL	○	○	607	218	7.50	7.00 - 8.50	7.7
255/35R18	94	W	○	BLK	TL	○	○	635	260	9.00	8.50 - 10.00	7.8
265/35R18	97	W	○	BLK	TL	○	○	643	271	9.50	9.00 - 10.50	7.8
275/35R18	95	W		BLK	TL	○	○	649	278	9.50	9.00 - 11.00	7.8
225/35R19	88	W	○	BLK	TL	○	○	641	230	8.00	7.50 - 9.00	7.8
235/35R19	91	W	○	BLK	TL	○	○	647	241	8.50	8.00 - 9.50	7.8
245/35R19	93	W	○	BLK	TL	○	○	655	248	8.50	8.00 - 9.50	7.8
245/35ZR20	95	W	○	BLK	TL	○	○	680	248	8.50	8.00 - 9.50	7.8
255/35R20	97	W	○	BLK	TL	○	○	686	260	9.00	8.50 - 10.00	7.8
275/35R20	102	W	○	BLK	TL	○	○	700	278	9.50	9.00 - 11.00	7.8
265/35ZR22	102	W	○	BLK	TL	○	○	745	271	9.50	9.00 - 10.50	7.8
205/40R17	84	W	○	BLK	TL	○	○	596	212	7.50	7.00 - 8.00	7.7
215/40R17	87	W	○	BLK	TL	○	○	604	218	7.50	7.00 - 8.50	7.7
245/40R17	91	W		BLK	TL	○	○	628	248	8.50	8.00 - 9.50	7.8
255/40R17	94	W		BLK	TL	○	○	636	260	9.00	8.50 - 10.00	7.8
225/40R18	92	W	○	BLK	TL	○	○	637	230	8.00	7.50 - 9.00	7.8
235/40R18	95	W	○	BLK	TL	○	○	645	241	8.50	8.00 - 9.50	7.8
245/40R18	97	W	○	BLK	TL	○	○	653	248	8.50	8.00 - 9.50	7.8
275/40R18	99	W		BLK	TL	○		677	278	9.50	9.00 - 11.00	7.8
245/40ZR19	94	W		BLK	TL	○	○	679	248	8.50	8.00 - 9.50	7.8
245/40ZR20	99	W	○	BLK	TL	○	○	704	248	8.50	8.00 - 9.50	7.8
195/45R16	84	W	○	BLK	TL	○	○	582	195	6.50	6.00 - 7.50	7.6
205/45R16	87	W	○	BLK	TL	○	○	590	206	7.00	6.50 - 7.50	7.7
205/45R17	88	W	○	BLK	TL	○	○	616	206	7.00	6.50 - 7.50	7.7
215/45R17	91	W	○	BLK	TL	○	○	626	213	7.00	7.00 - 8.00	7.7
225/45R17	94	W	○	BLK	TL	○	○	634	225	7.50	7.00 - 8.50	7.8
235/45R17	94	W		BLK	TL	○	○	644	236	8.00	7.50 - 9.00	7.8
245/45R17	95	W		BLK	TL	○	○	652	243	8.00	7.50 - 9.00	7.8
225/45R18	95	W	○	BLK	TL	○	○	659	225	7.50	7.00 - 8.50	7.8
245/45R18	100	W	○	BLK	TL	○	○	677	243	8.00	7.50 - 9.00	7.8
255/45ZR18	99	W		BLK	TL	○	○	687	255	8.50	8.00 - 9.50	7.8

Continued next page.



SPORT

DIREZZA DZ102

STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
195/50R15	82	V		BLK	TL	○	○	577	201	6.00	5.50 - 7.00	7.6
205/50R15	86	V		BLK	TL	○	○	587	214	6.50	5.50 - 7.50	7.7
195/50R16	84	V		BLK	TL	○	○	602	201	6.00	5.50 - 7.00	7.6
205/50R16	87	V		BLK	TL	○	○	612	214	6.50	5.50 - 7.50	7.7
215/50R16	90	V		BLK	TL	○	○	622	226	7.00	6.00 - 7.50	7.8
225/50R16	92	V		BLK	TL	○	○	632	233	7.00	6.00 - 8.00	7.8
205/50ZR17	93	W	○	BLK	TL	○	○	638	214	6.50	5.50 - 7.50	7.7
215/50R17	91	V		BLK	TL	○	○	648	226	7.00	6.00 - 7.50	7.8
225/50R17	94	W		BLK	TL	○	○	658	233	7.00	6.00 - 8.00	7.8
235/50ZR17	96	W		BLK	TL	○	○	668	245	7.50	6.50 - 8.50	7.8
235/50ZR18	97	W		BLK	TL	○	○	693	245	7.50	6.50 - 8.50	7.9
195/55R15	85	V		BLK	TL	○		595	201	6.00	5.50 - 7.00	7.6
205/55R15	88	V		BLK	TL	○	○	607	214	6.50	5.50 - 7.50	7.6
205/55R16	91	V		BLK	TL	○	○	632	214	6.50	5.50 - 7.50	7.7
215/55R16	93	V		BLK	TL	○	○	642	226	7.00	6.00 - 7.50	7.8
225/55R16	95	V		BLK	TL	○	○	654	233	7.00	6.00 - 8.00	7.8
215/55R17	94	V		BLK	TL	○	○	668	226	7.00	6.00 - 7.50	7.8
235/55ZR17	99	W		BLK	TL	○	○	690	245	7.50	6.50 - 8.50	7.8
185/60R14	82	H		BLK	TL		○	578	189	5.50	5.00 - 6.50	7.5
195/60R15	88	H		BLK	TL			615	201	6.00	5.50 - 7.00	7.7
205/60R15	91	H		BLK	TL			627	209	6.00	5.50 - 7.50	7.8



COMFORT

SP SPORT LM704

**SP SPORT
LM704**

STEEL BELTED RADIAL

Offers high balance of comfort,safety&economy for a wide range of vehicle types.

Tread pattern optimises contact pressure to control irregular wear and enhance tyre life.

Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
205/40ZR17	84	W	○	BLK	TL	○	○	596	212	7.50	7.00 - 8.00	8.2
225/40ZR18	92	W	○	BLK	TL	○	○	637	230	8.00	7.50 - 9.00	8.3
235/40ZR18	95	W	○	BLK	TL	○	○	645	241	8.50	8.00 - 9.50	8.3
245/40ZR18	97	W	○	BLK	TL	○	○	653	248	8.50	8.00 - 9.50	8.3
195/45ZR16	84	W	○	BLK	TL	○	○	582	195	6.50	6.00 - 7.50	8.1
205/45ZR16	83	W		BLK	TL	○	○	590	206	7.00	6.50 - 7.50	8.2
205/45ZR17	88	W	○	BLK	TL	○	○	616	206	7.00	6.50 - 7.50	8.2
215/45ZR17	91	W	○	BLK	TL	○		629	207	7.00	7.00 - 8.00	7.9
215/45ZR17	87	W		BLK	TL	○	○	626	213	7.00	7.00 - 8.00	7.9
215/45ZR17	91	W	○	BLK	TL	○	○	626	213	7.00	7.00 - 8.00	8.2
225/45ZR17	94	W	○	BLK	TL	○	○	634	225	7.50	7.00 - 8.50	8.3
235/45ZR17	94	W		BLK	TL	○	○	644	236	8.00	7.50 - 9.00	8.4
245/45R17	95	W		BLK	TL	○		652	243	8.00	7.50 - 9.00	8.1
225/45ZR18	95	W	○	BLK	TL	○	○	659	225	7.50	7.00 - 8.50	8.3
225/45R18	95	W	○	BLK	TL	○		662	220	7.00	7.00 - 8.50	8.0
235/45R18	94	W		BLK	TL	○		669	232	8.00	7.50 - 9.00	8.1
245/45R18	100	W	○	BLK	TL	○		677	237	8.00	7.50 - 9.00	8.1
245/45R19	98	W		BLK	TL	○		706	237	8.00	7.50 - 9.00	8.1
P175/50R13	72	H		BLK	TL	○	○	506	182	5.50	5.00 - 6.00	8.0
P215/50R13	84	H		BLK	TL	○	○	546	226	7.00	6.00 - 7.50	8.2
195/50R15	82	V		BLK	TL	○	○	577	201	6.00	5.50 - 7.00	8.1
205/50R15	86	V		BLK	TL	○	○	587	214	6.50	5.50 - 7.50	8.2
195/50R16	84	V		BLK	TL	○	○	602	201	6.00	5.50 - 7.00	8.1
205/50R16	87	V		BLK	TL	○	○	612	214	6.50	5.50 - 7.50	8.2
205/50R17	89	V		BLK	TL	○	○	638	214	6.50	5.50 - 7.50	8.2
215/50R17	91	V		BLK	TL	○	○	648	226	7.00	6.00 - 7.50	8.3
225/50R17	94	V		BLK	TL	○	○	658	233	7.00	6.00 - 8.00	8.3
225/50R17	98	V	○	BLK	TL	○		660	219	7.00	6.00 - 8.00	8.0
235/50R18	97	V		BLK	TL	○	○	693	245	7.50	6.50 - 8.50	8.4
235/50R18	97	W		BLK	TL	○		691	233	7.50	6.50 - 8.50	8.1
245/50R18	100	W		BLK	TL	○		703	253	7.50	7.00 - 8.50	8.1
185/55R15	82	V		BLK	TL	○	○	585	194	6.00	5.00 - 6.50	8.0
195/55R15	85	V		BLK	TL	○	○	595	201	6.00	5.50 - 7.00	8.1
185/55R16	83	V		BLK	TL	○	○	610	194	6.00	5.00 - 6.50	8.0
195/55R16	87	V		BLK	TL	○	○	620	201	6.00	5.50 - 7.00	8.1
205/55R16	91	V		BLK	TL	○	○	632	214	6.50	5.50 - 7.50	8.2
215/55R16	93	V		BLK	TL	○	○	642	226	7.00	6.00 - 7.50	8.3
225/55R16	95	V		BLK	TL	○	○	654	233	7.00	6.00 - 8.00	8.3
215/55R17	94	V		BLK	TL	○	○	668	226	7.00	6.00 - 7.50	8.3
225/55R17	97	V		BLK	TL	○	○	680	233	7.00	6.00 - 8.00	8.3
225/55R17	101	W	○	BLK	TL	○		683	223	7.00	6.00 - 8.00	7.4
235/55R17	99	V		BLK	TL	○	○	690	245	7.50	6.50 - 8.50	8.4
235/55R18	100	V		BLK	TL	○	○	715	245	7.50	6.50 - 8.50	8.4
185/60R13	80	H		BLK	TL		○	552	189	5.50	5.00 - 6.50	8.0
195/60R13	83	H		BLK	TL		○	564	201	6.00	5.50 - 7.00	8.2
205/60R13	86	H		BLK	TL		○	576	209	6.00	5.50 - 7.50	8.3
165/60R14	75	H		BLK	TL			553	168	5.00	4.50 - 6.00	6.2

Continued next page.



COMFORT

SP SPORT LM704

STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
175/60R14	79	H		BLK	TL	○	566	177	5.00	5.00 - 6.00	7.9
185/60R14	82	H		BLK	TL	○	578	189	5.50	5.00 - 6.50	8.0
195/60R14	86	H		BLK	TL	○	590	201	6.00	5.50 - 7.00	8.2
175/60R15	81	H		BLK	TL	○	591	177	5.00	5.00 - 6.00	7.9
185/60R15	84	H		BLK	TL	○	603	189	5.50	5.00 - 6.50	8.0
185/60R15	88	H		BLK	TL	○	603	189	5.50	5.00 - 6.50	7.7
195/60R15	88	H		BLK	TL	○	615	201	6.00	5.50 - 7.00	8.2
195/60R15	88	V		BLK	TL	○	615	201	6.00	5.50 - 7.00	8.2
205/60R15	91	V		BLK	TL	○	627	209	6.00	5.50 - 7.50	8.3
215/60R15	94	H		BLK	TL	○	639	221	6.50	6.00 - 7.50	8.3
205/60R16	92	H		BLK	TL	○	652	209	6.00	5.50 - 7.50	8.3
215/60R16	95	H		BLK	TL	○	664	221	6.50	6.00 - 7.50	8.3
215/60R16	95	V		BLK	TL	○	664	221	6.50	6.00 - 7.50	8.0
225/60R16	98	H		BLK	TL	○	676	228	6.50	6.00 - 8.00	8.4
225/60R16	98	V		BLK	TL	○	676	228	6.50	6.00 - 8.00	8.4
215/60R17	96	H		BLK	TL	○	690	221	6.50	6.00 - 7.50	8.3
225/60R17	99	H		BLK	TL	○	702	228	6.50	6.00 - 8.00	8.4
225/60R18	100	V		BLK	TL	○	727	228	6.50	6.00 - 8.00	8.4
155/65R13	73	H		BLK	TL	○	532	157	4.50	4.50 - 5.50	7.9
175/65R14	82	H		BLK	TL	○	584	177	5.00	5.00 - 6.00	8.0
185/65R14	86	H		BLK	TL	○	596	189	5.50	5.00 - 6.50	8.1
195/65R14	89	H		BLK	TL	○	610	201	6.00	5.50 - 7.00	8.2
185/65R15	88	H		BLK	TL	○	621	189	5.50	5.00 - 6.50	8.1
195/65R15	91	H		BLK	TL	○	635	201	6.00	5.50 - 7.00	8.2
195/65R15	91	V		BLK	TL	○	635	201	6.00	5.50 - 7.00	8.2
205/65R15	94	V		BLK	TL	○	647	209	6.00	5.50 - 7.50	8.3
205/65R15	94	H		BLK	TL		645	210	6.00	5.50 - 7.50	8.0
205/65R15	99	H	○	BLK	TL	○	647	209	6.00	5.50 - 7.50	8.3
215/65R15	96	H		BLK	TL	○	661	221	6.50	6.00 - 7.50	8.3
205/65R16	95	H		BLK	TL	○	672	209	6.00	5.50 - 7.50	8.3
215/65R16	98	H		BLK	TL	○	686	221	6.50	6.00 - 7.50	8.3
175/70R13	82	H		BLK	TL	○	576	177	5.00	4.50 - 6.00	7.9
185/70R13	86	H		BLK	TL	○	590	189	5.50	4.50 - 6.00	8.0
175/70R14	84	H		BLK	TL	○	602	177	5.00	4.50 - 6.00	7.9
185/70R14	88	H		BLK	TL	○	616	189	5.50	4.50 - 6.00	8.0
195/70R14	91	H		BLK	TL	○	630	201	6.00	5.00 - 6.50	8.1
205/70R14	94	H		BLK	TL	○	644	209	6.00	5.00 - 7.00	8.2
205/70R15	96	H		BLK	TL	○	669	209	6.00	5.00 - 7.00	8.2
215/70R15	98	H		BLK	TL	○	683	221	6.50	5.50 - 7.00	8.3



COMFORT

SP SPORT FM800

STEEL BELTED RADIAL

Designed to optimize dry and wet grip performance.
It also enhances handling and stability at high speed.

SP SPORT
FM800

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
225/40R18	92	W	○	BLK TL	○	○	637	230	8.00	7.50 - 9.00	8.0
245/40R18	97	W	○	BLK TL	○	○	653	245	8.50	8.00 - 9.50	8.0
195/45R16	84	V	○	BLK TL	○	○	582	194	6.50	6.00 - 7.50	7.7
215/45R16	86	V		BLK TL	○	○	600	212	7.00	7.00 - 8.00	7.9
205/45R17	88	W	○	BLK TL	○	○	616	206	7.00	6.50 - 7.50	7.8
215/45R17	91	W	○	BLK TL	○	○	626	212	7.00	7.00 - 8.00	7.9
225/45R17	94	W	○	BLK TL	○	○	634	224	7.50	7.00 - 8.50	8.0
235/45R17	94	W		BLK TL	○	○	644	236	8.00	7.50 - 9.00	8.0
245/45R17	95	W		BLK TL	○	○	652	243	8.00	7.50 - 9.00	8.0
245/45R18	100	W	○	BLK TL	○	○	677	243	8.00	7.50 - 9.00	8.0
175/50R15	75	H		BLK TL	○	○	557	180	5.50	5.00 - 6.00	7.7
195/50R15	82	V		BLK TL	○	○	577	200	6.00	5.50 - 7.00	7.7
195/50R16	84	V		BLK TL	○	○	602	201	6.00	5.50 - 7.00	7.7
205/50R17	93	W	○	BLK TL	○	○	638	212	6.50	5.50 - 7.50	7.8
215/50R17	91	W		BLK TL	○	○	648	224	7.00	6.00 - 7.50	7.9
225/50R17	94	W		BLK TL	○	○	658	232	7.00	6.00 - 8.00	8.0
185/55R14	80	H		BLK TL	○	○	560	194	6.00	5.00 - 6.50	7.6
185/55R15	86	V	○	BLK TL	○	○	585	194	6.00	5.00 - 6.50	7.6
195/55R15	85	V		BLK TL	○	○	595	201	6.00	5.50 - 7.00	7.7
205/55R15	88	V		BLK TL	○	○	607	213	6.50	5.50 - 7.50	7.8
185/55R16	83	V		BLK TL	○	○	610	194	6.00	5.00 - 6.50	7.6
195/55R16	87	V		BLK TL	○	○	620	201	6.00	5.50 - 7.00	7.7
205/55R16	91	V		BLK TL	○	○	632	213	6.50	5.50 - 7.50	7.8
215/55R16	93	V		BLK TL	○	○	642	225	7.00	6.00 - 7.50	7.9
215/55R16	97	W	○	BLK TL	○	○	642	225	7.00	6.00 - 7.50	7.9
225/55R16	95	V		BLK TL	○	○	654	233	7.00	6.00 - 8.00	8.0
205/55R17	91	V		BLK TL	○	○	658	213	6.50	5.50 - 7.50	7.8
215/55R17	94	W		BLK TL	○	○	668	225	7.00	6.00 - 7.50	7.9
225/55R17	101	W	○	BLK TL	○	○	680	233	7.00	6.00 - 8.00	8.0
215/55R18	95	H		BLK TL	○	○	693	225	7.00	6.00 - 7.50	7.9
225/55R18	98	H		BLK TL	○	○	705	233	7.00	6.00 - 8.00	8.0
185/60R13	80	H		BLK TL		○	552	189	5.50	5.00 - 6.50	7.8
185/60R14	82	H		BLK TL		○	578	189	5.50	5.00 - 6.50	7.8
175/60R15	81	H		BLK TL		○	591	177	5.00	5.00 - 6.00	7.7
185/60R15	84	H		BLK TL		○	603	189	5.50	5.00 - 6.50	7.8
185/60R15	88	H	○	BLK TL		○	603	189	5.50	5.00 - 6.50	7.8
195/60R15	88	H		BLK TL		○	615	201	6.00	5.50 - 7.00	7.9
195/60R15	88	V		BLK TL		○	615	201	6.00	5.50 - 7.00	7.9
205/60R15	91	H		BLK TL		○	627	209	6.00	5.50 - 7.50	8.0
195/60R16	89	V		BLK TL		○	640	201	6.00	5.50 - 7.00	7.9
205/60R16	92	H		BLK TL		○	652	208	6.00	5.50 - 7.50	8.0
215/60R16	99	H	○	BLK TL		○	664	221	6.50	6.00 - 7.50	8.0
225/60R18	100	H		BLK TL		○	727	228	6.50	6.00 - 8.00	8.0
175/65R14	82	H		BLK TL		○	586	178	5.00	5.00 - 6.00	7.7
185/65R14	86	H		BLK TL		○	598	189	5.50	5.00 - 6.50	7.8
175/65R15	84	H		BLK TL		○	611	178	5.00	5.00 - 6.00	7.7
185/65R15	88	H		BLK TL		○	623	189	5.50	5.00 - 6.50	7.8
195/65R15	91	H		BLK TL		○	637	202	6.00	5.50 - 7.00	7.9



COMFORT

SP SPORT FM800

STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
195/65R15	91	V		BLK	TL	○	637	202	6.00	5.50 - 7.00	7.9
205/65R15	94	H		BLK	TL	○	649	209	6.00	5.50 - 7.50	8.0
205/65R16	95	H		BLK	TL	○	674	209	6.00	5.50 - 7.50	8.0
215/65R16	98	H		BLK	TL	○	688	221	6.50	6.00 - 7.50	8.0
225/65R17	102	V		BLK	TL	○	726	227	6.50	6.00 - 8.00	8.0

STANDARD

SP TOURING T1

STEEL BELTED RADIAL

Dunlop's touring tyre features long life, enhanced stability on wet roads, low noise and ride comfort. The tread compound combining 2 kinds of special polymer provides grip and long life. The optimized construction and contact shape reduces irregular wear and improves handling.



SP TOURING T1

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
175/50R15	75	H		BLK	TL	○	557	182	5.50	5.00 - 6.00	7.7
195/50R15	82	H		BLK	TL	○	577	201	6.00	5.50 - 7.00	7.7
195/50R16	84	H		BLK	TL	○	602	201	6.00	5.50 - 7.00	7.7
185/55R15	82	H		BLK	TL	○	585	195	6.00	5.00 - 6.50	7.7
195/55R15	85	H		BLK	TL	○	595	202	6.00	5.50 - 7.00	7.8
185/55R16	83	H		BLK	TL	○	610	195	6.00	5.00 - 6.50	7.7
205/55R16	91	H		BLK	TL	○	632	215	6.50	5.50 - 7.50	7.9
215/55R16	93	H		BLK	TL	○	642	226	7.00	6.00 - 7.50	8.0
165/60R14	75	T		BLK	TL	○	554	171	5.00	4.50 - 6.00	7.6
185/60R14	82	T		BLK	TL	○	578	188	5.50	5.00 - 6.50	7.7
185/60R14	82	H		BLK	TL	○	578	188	5.50	5.00 - 6.50	7.7
195/60R14	86	H		BLK	TL	○	590	201	6.00	5.50 - 7.00	7.8
175/60R15	81	T		BLK	TL	○	591	177	5.00	5.00 - 6.00	7.6
185/60R15	84	H		BLK	TL	○	603	188	5.50	5.00 - 6.50	7.7
195/60R15	88	H		BLK	TL	○	612	201	6.00	5.50 - 7.00	7.8
205/60R15	91	H		BLK	TL	○	627	209	6.00	5.50 - 7.50	7.9
195/60R16	89	H		BLK	TL	○	640	201	6.00	5.50 - 7.00	7.8
205/60R16	92	H		BLK	TL	○	653	208	6.00	5.50 - 7.50	7.9
215/60R16	95	H		BLK	TL	○	664	221	6.50	6.00 - 7.50	8.0
225/60R16	98	H		BLK	TL	○	676	228	6.50	6.00 - 8.00	8.1

Continued next page.



STANDARD

SP TOURING T1

STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
165/65R13	77	T		BLK	TL		○	544	170	5.00	4.50 - 6.00	7.5
165/65R14	79	T		BLK	TL		○	570	170	5.00	4.50 - 6.00	7.5
175/65R14	82	T		BLK	TL		○	584	178	5.00	5.00 - 6.00	7.6
175/65R14	82	H		BLK	TL		○	584	178	5.00	5.00 - 6.00	7.6
185/65R14	86	T		BLK	TL		○	596	189	5.50	5.00 - 6.50	7.7
185/65R14	86	H		BLK	TL		○	596	189	5.50	5.00 - 6.50	7.7
195/65R14	89	T		BLK	TL		○	610	202	6.00	5.50 - 7.00	7.8
205/65R14	91	T		BLK	TL		○	622	209	6.00	5.50 - 7.50	7.9
175/65R15	84	T		BLK	TL		○	609	178	5.00	5.00 - 6.00	7.6
185/65R15	88	T		BLK	TL		○	621	189	5.50	5.00 - 6.50	7.7
185/65R15	88	H		BLK	TL		○	621	189	5.50	5.00 - 6.50	7.7
195/65R15	91	T		BLK	TL		○	635	202	6.00	5.50 - 7.00	7.8
195/65R15	91	H		BLK	TL		○	635	202	6.00	5.50 - 7.00	7.8
205/65R15	94	T		BLK	TL		○	647	209	6.00	5.50 - 7.50	7.9
205/65R15	94	H		BLK	TL		○	647	209	6.00	5.50 - 7.50	7.9
215/65R15	96	T		BLK	TL		○	661	220	6.50	6.00 - 7.50	8.0
145/70R12	69	T		BLK	TL		○	509	150	4.50	3.50 - 5.00	7.4
155/70R12	73	T		BLK	TL		○	523	157	4.50	4.00 - 5.00	7.4
165/70R12	77	T		BLK	TL		○	537	169	5.00	4.00 - 5.50	7.5
175/70R12	80	T		BLK	TL		○	551	176	5.00	4.50 - 6.00	7.6
155/70R13	75	T		BLK	TL		○	548	157	4.50	4.00 - 5.00	7.4
165/70R13	79	T		BLK	TL		○	562	169	5.00	4.00 - 5.50	7.5
175/70R13	82	T		BLK	TL		○	576	176	5.00	4.50 - 6.00	7.6
175/70R13	82	H		BLK	TL		○	576	176	5.00	4.50 - 6.00	7.6
185/70R13	86	T		BLK	TL		○	590	189	5.50	4.50 - 6.00	7.7
175/70R14	84	T		BLK	TL		○	602	176	5.00	4.50 - 6.00	7.6
185/70R14	88	T		BLK	TL		○	616	189	5.50	4.50 - 6.00	7.7
185/70R14	88	H		BLK	TL		○	616	189	5.50	4.50 - 6.00	7.7
195/70R14	91	T		BLK	TL		○	630	201	6.00	5.00 - 6.50	7.8
195/70R14	91	H		BLK	TL		○	630	201	6.00	5.00 - 6.50	7.8
205/70R14	98	T	○	BLK	TL		○	644	209	6.00	5.00 - 7.00	7.9
205/70R15	96	T		BLK	TL		○	669	209	6.00	5.00 - 7.00	7.9
205/70R15	96	H		BLK	TL		○	669	209	6.00	5.00 - 7.00	7.9
215/70R15	98	T		BLK	TL		○	683	221	6.50	5.50 - 7.00	8.0
215/70R15	98	H		BLK	TL		○	683	221	6.50	5.50 - 7.00	8.0
145/80R12	74	S		BLK	TL		○	537	145	4.00	3.50 - 5.00	7.4
155/80R13	79	S		BLK	TL		○	578	157	4.50	4.00 - 5.00	7.4
165/80R13	83	S		BLK	TL		○	594	164	4.50	4.00 - 5.50	7.5
185/80R14	91	S		BLK	TL		○	652	182	5.00	4.50 - 6.00	7.7



STANDARD

SP TOURING R1

STEEL BELTED RADIAL

A compact car tyre Touring R1 is developed to enhance fuel efficiency and wet performance without compromise.



SP TOURING R1

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
185/60R14	82	T		BLK	TL	○	580	190	5.50	5.00 - 6.50	8.2
185/60R15	84	T		BLK	TL	○	605	190	5.50	5.00 - 6.50	8.2
155/65R14	75	T		BLK	TL	○	561	158	4.50	4.50 - 5.50	8.1
165/65R14	79	T		BLK	TL	○	573	169	5.00	4.50 - 6.00	8.1
175/65R14	82	T		BLK	TL	○	589	176	5.00	5.00 - 6.00	8.2
185/65R14	86	T		BLK	TL	○	601	188	5.50	5.00 - 6.00	8.3
185/65R15	88	T		BLK	TL	○	626	188	5.50	5.00 - 6.50	8.3
195/65R15	91	T		BLK	TL	○	640	200	6.00	5.50 - 7.00	8.4
155/70R13	75	T		BLK	TL	○	551	156	4.50	4.00 - 5.00	8.1
165/70R13	79	T		BLK	TL	○	567	170	5.00	4.00 - 5.50	8.2
175/70R13	82	T		BLK	TL	○	581	177	5.00	4.50 - 6.00	8.3
165/70R14	81	T		BLK	TL	○	593	170	5.00	4.00 - 5.50	8.2
175/70R14	84	T		BLK	TL	○	607	177	5.00	4.50 - 6.00	8.3
185/70R14	88	T		BLK	TL	○	621	190	5.50	4.50 - 6.00	8.4

SP TOURING R1(for Asia and limited market)

STEEL BELTED RADIAL

A tyre with sporty 4 ribs design construction has a high stiffness. It is suitable for small and medium cars.



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
175/50R15	75	H		BLK	TL	○	557	182	5.50	5.00 - 6.00	8.1
195/50R16	84	H		BLK	TL	○	602	201	6.00	5.50 - 7.00	8.3
185/55R15	82	H		BLK	TL	○	585	194	6.00	5.00 - 6.50	8.2
195/55R15	85	H		BLK	TL	○	595	201	6.00	5.50 - 7.00	8.3
185/55R16	83	H		BLK	TL	○	610	194	6.00	5.00 - 6.50	8.2
205/55R16	91	H		BLK	TL	○	632	214	6.50	5.50 - 7.50	8.4
* 215/55R16	93	H		BLK	TL	○	642	226	7.00	6.00 - 7.50	8.5
165/60R14	75	T		BLK	TL	○	554	170	5.00	4.50 - 6.00	7.6
185/60R14	82	H		BLK	TL	○	578	189	5.50	5.00 - 6.50	8.2
195/60R14	86	H		BLK	TL	○	590	201	6.00	5.50 - 7.00	8.3
175/60R15	81	S		BLK	TL	○	591	177	5.00	5.00 - 6.00	8.1
185/60R15	84	H		BLK	TL	○	603	189	5.50	5.00 - 6.50	8.2
195/60R15	88	H		BLK	TL	○	615	201	6.00	5.50 - 7.00	8.3
205/60R15	91	T		BLK	TL	○	627	209	6.00	5.50 - 7.50	8.4

* : 5rib

Continued next page.



STANDARD

SP TOURING R1(for Asia and limited market)

STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
185/60R16	86	T		BLK	TL		628	189	5.50	5.00 - 6.50	8.2
205/60R16	92	H		BLK	TL	○	652	209	6.00	5.50 - 7.50	8.4
* 215/60R16	95	H		BLK	TL	○	664	221	6.50	6.00 - 7.50	8.5
165/65R13	77	T		BLK	TL	○	544	170	5.00	4.50 - 6.00	7.5
165/65R14	79	T		BLK	TL	○	570	170	5.00	4.50 - 6.00	7.5
175/65R14	82	H		BLK	TL	○	584	177	5.00	5.00 - 6.00	8.1
185/65R14	86	H		BLK	TL	○	596	189	5.50	5.00 - 6.50	8.2
195/65R14	89	T		BLK	TL	○	610	201	6.00	5.50 - 7.00	8.3
175/65R15	84	H		BLK	TL	○	609	177	5.00	5.00 - 6.00	8.1
185/65R15	88	H		BLK	TL	○	621	189	5.50	5.00 - 6.50	8.2
195/65R15	91	H		BLK	TL	○	635	201	6.00	5.50 - 7.00	8.3
205/65R15	94	H		BLK	TL	○	647	209	6.00	5.50 - 7.50	8.4
215/65R15	96	H		BLK	TL	○	661	221	6.50	6.00 - 7.50	8.5
155/70R12	73	T		BLK	TL	○	523	157	4.50	4.00 - 5.00	7.5
175/70R12	80	S		BLK	TL	○	551	177	5.00	4.50 - 6.00	8.1
165/70R13	79	T		BLK	TL	○	562	170	5.00	4.00 - 5.50	7.6
175/70R13	82	T		BLK	TL	○	576	177	5.00	4.50 - 6.00	8.1
185/70R13	86	S		BLK	TL	○	590	189	5.50	4.50 - 6.00	8.2
165/70R14	81	H		BLK	TL	○	588	170	5.00	4.00 - 5.50	7.6
185/70R14	88	H		BLK	TL	○	616	189	5.50	4.50 - 6.00	8.2
195/70R14	91	H		BLK	TL	○	630	201	6.00	5.00 - 6.50	8.3
205/70R15	96	H		BLK	TL	○	669	209	6.00	5.00 - 7.00	8.4
215/70R15	98	H		BLK	TL	○	683	221	6.50	5.50 - 7.00	8.5
165/80R13	83	S		BLK	TL	○	594	165	4.50	4.00 - 5.50	7.5
185/80R14	91	S		BLK	TL	○	652	184	5.00	4.50 - 6.00	8.2

* : 5rib

ECO

ENASAVE EC300+

STEEL BELTED RADIAL

The EC300+ is a tyre engineered for a quiet ride and comfort, be it in the city or open road.

The low rolling resistance compound also means additional fuel savings for environmental friendliness.



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
225/50R17	94	V		BLK	TL	○	658	235	7.00	6.00 - 8.00	7.9
185/55R16	83	V		BLK	TL		611	195	6.00	5.00 - 6.50	7.7
215/55R17	94	V		BLK	TL		670	226	7.00	6.00 - 7.50	7.9
175/60R15	81	H		BLK	TL		592	177	5.00	5.00 - 6.00	7.7
205/60R16	92	H		BLK	TL		654	210	6.00	5.50 - 7.50	7.8
215/60R16	95	H		BLK	TL		666	223	6.50	6.00 - 7.50	7.9
175/65R15	84	H		BLK	TL		609	177	5.00	5.00 - 6.00	7.7
215/65R16	98	H		BLK	TL		689	223	6.50	6.00 - 7.50	7.9



ECO

ENASAVE EC503

STEEL BELTED RADIAL

Dunlop's ECO steel-belted tyre with notable feature of low rolling resistance which enhances fuel consumption. Provides long life and pleasant riding comfort and silence by well tuned asymmetric pattern.



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
215/65R16	98	H		BLK	TL	○	684	219	6.50	6.00 - 7.50	8.1
205/70R15	96	H		BLK	TL	○	666	208	6.00	5.00 - 7.00	8.0

SPORT

SP SPORT 601

STEEL BELTED RADIAL

With the superior SP SPORT 601 performance, the white slim line is put onto the sidewall of this fashionable radial.



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
205/60R14	89	H		BLK	TL		601	211	6.00	5.50 - 7.50	7.9
P215/70R15	97	H		SL	TL	○	682	222	6.50	5.50 - 7.00	7.7
P225/70R15	100	H		SL	TL		694	230	6.50	6.00 - 7.50	7.8
P195/75R14	92	H		SL	TL	○	647	195	5.50	5.00 - 6.50	7.5
P205/75R14	95	H		SL	TL	○	662	203	5.50	5.00 - 7.00	7.6
P205/75R15	97	H		SL	TL	○	688	200	5.50	5.00 - 7.00	7.6
P215/75R15	100	H		SL	TL	○	701	217	6.00	5.50 - 7.00	7.7
P225/75R15	102	H		SL	TL	○	716	217	6.00	6.00 - 7.50	7.8
P235/75R15	105	H		SL	TL	○	732	235	6.50	6.00 - 8.00	7.9

SP SPORT GT

STEEL BELTED RADIAL

The SP SPORT GT is a high performance tyre with white lettering developed for SUVs.

Three straight and lateral grooves in the asymmetric pattern provide high performance in wet and dry conditions.



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
P245/50R14	93	S		WLT	TL	○	600	246	7.50	7.00 - 8.50	8.1
P265/50R15	99	S		WLT	TL	○	643	266	8.50	7.50 - 9.50	8.0
P295/50R15	105	S		WLT	TL	○	670	296	9.50	8.00 - 10.50	8.1
P205/60R13	86	S		WLT	TL		572	207	6.00	5.50 - 7.50	7.9
P235/60R14	96	S		WLT	TL		640	238	7.00	6.50 - 8.50	7.8
P245/60R14	98	S		WLT	TL		648	246	7.00	7.00 - 8.50	8.1
P255/60R15	102	S		WLT	TL		684	258	7.50	7.00 - 9.00	8.1
P275/60R15	107	S		WLT	TL		708	285	8.00	7.50 - 9.50	8.1



STUDLESS TYRE

WINTER MAXX WM01

STEEL BELTED RADIAL

Dunlop's studless tyre which offers increased blade density & prevents block distortion.
"MAXX SHARP EDGE" (using New Miura-Ori sipes) improves ice contact with longer edges.



Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
225/40R18	92	T	○	BLK	TL	○	○	637	229	8.00	7.50 - 9.00	9.2
245/40R18	97	T	○	BLK	TL	○	○	655	245	8.50	8.00 - 9.50	9.4
245/40RF19	94	T		BLK	TL	○	○	683	251	8.50	8.00 - 9.50	9.4
275/40R19	101	T		BLK	TL	○	○	703	278	9.50	9.00 - 11.00	9.7
215/45R17	91	T	○	BLK	TL	○	○	632	207	7.00	7.00 - 8.00	9.2
225/45R17	94	T	○	BLK	TL	○	○	638	220	7.50	7.00 - 8.50	9.2
235/45R17	97	T	○	BLK	TL	○	○	648	230	8.00	7.50 - 9.00	9.3
245/45R17	99	T	○	BLK	TL	○	○	658	234	8.00	7.50 - 9.00	9.4
215/45R18	93	T	○	BLK	TL	○	○	654	209	7.00	7.00 - 8.00	9.2
225/45R18	95	T	○	BLK	TL	○	○	661	220	7.50	7.00 - 8.50	9.2
245/45R18	100	T	○	BLK	TL	○	○	683	236	8.00	7.50 - 9.00	9.4
255/45R18	103	T	○	BLK	TL	○	○	694	247	8.50	8.00 - 9.50	9.5
245/45R19	98	T		BLK	TL	○	○	708	236	8.00	7.50 - 9.00	9.4

Continued next page.



STUDLESS TYRE

WINTER MAXX WM01

STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
195/50R15	82	T		BLK	TL	○	581	201	6.00	5.50 - 7.00	9.0
205/50R17	93	T	○	BLK	TL	○	644	203	6.50	5.50 - 7.50	9.1
215/50R17	95	T	○	BLK	TL	○	654	217	7.00	6.00 - 7.50	9.2
225/50R17	98	T	○	BLK	TL	○	662	225	7.00	6.00 - 8.00	9.2
235/50R18	101	T	○	BLK	TL	○	698	237	7.50	6.50 - 8.50	9.3
185/55R15	82	T		BLK	TL	○	587	192	6.00	5.00 - 6.50	8.9
195/55R15	85	T		BLK	TL	○	598	197	6.00	5.50 - 7.00	9.0
185/55R16	83	T		BLK	TL	○	612	192	6.00	5.00 - 6.50	8.9
195/55R16	91	T	○	BLK	TL	○	623	198	6.00	5.50 - 7.00	9.0
205/55R16	94	T	○	BLK	TL	○	636	211	6.50	5.50 - 7.50	9.1
215/55R16	97	T	○	BLK	TL	○	649	221	7.00	6.00 - 7.50	9.2
225/55R16	99	T	○	BLK	TL	○	654	229	7.00	6.00 - 8.00	9.2
215/55R17	94	T		BLK	TL	○	673	220	7.00	6.00 - 7.50	9.2
225/55R17	101	T	○	BLK	TL	○	685	229	7.00	6.00 - 8.00	9.2
225/55R18	98	T		BLK	TL	○	711	229	7.00	6.00 - 8.00	9.2
185/60R14	82	T		BLK	TL		581	190	5.50	5.00 - 6.50	8.9
185/60R15	84	T		BLK	TL		607	188	5.50	5.00 - 6.50	8.9
195/60R15	88	T		BLK	TL		616	201	6.00	5.50 - 7.00	9.0
205/60R16	96	T	○	BLK	TL		656	206	6.00	5.50 - 7.50	9.1
215/60R16	99	T	○	BLK	TL		667	219	6.50	6.00 - 7.50	9.2
225/60R16	102	T	○	BLK	TL		678	228	6.50	6.00 - 8.00	9.3
215/60R17	96	T		BLK	TL		693	219	6.50	6.00 - 7.50	9.2
155/65R14	75	T		BLK	TL		564	153	4.50	4.50 - 5.50	8.6
175/65R14	82	T		BLK	TL		586	178	5.00	5.00 - 6.00	8.8
185/65R14	86	T		BLK	TL		596	193	5.50	5.00 - 6.50	8.9
175/65R15	84	T		BLK	TL		608	178	5.00	5.00 - 6.00	8.8
185/65R15	88	T		BLK	TL		621	190	5.50	5.00 - 6.50	8.9
195/65R15	91	T		BLK	TL		637	203	6.00	5.50 - 7.00	9.0
205/65R15	94	T		BLK	TL		648	210	6.00	5.50 - 7.50	9.1
205/65R16	95	T		BLK	TL		672	207	6.00	5.50 - 7.50	9.1
215/65R16	98	T		BLK	TL		686	223	6.50	6.00 - 7.50	9.2
155/70R13	75	T		BLK	TL		553	154	4.50	4.00 - 5.00	8.6
175/70R13	82	T		BLK	TL		583	177	5.00	4.50 - 6.00	8.8
175/70R14	84	T		BLK	TL		605	180	5.00	4.50 - 6.00	8.8
185/70R14	88	T		BLK	TL		621	189	5.50	4.50 - 6.00	8.9
205/70R15	96	T		BLK	TL		675	205	6.00	5.00 - 7.00	9.1
215/70R15	98	T		BLK	TL		690	221	6.50	5.50 - 7.00	9.2



STUDLESS TYRE

WINTER MAXX WM02

STEEL BELTED RADIAL

A Studless tyre with newly developed compound and pattern enhanced ice, snow and long lasting performance. New softer, connecting to polymers firmly and coming away less, Keep the flexibility of rubber.



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
225/40R18	92	T	○	BLK	TL	○	645	230	8.00	7.50 - 9.00	9.2
245/40R18	97	T	○	BLK	TL	○	653	248	8.50	8.00 - 9.50	9.4
215/45R17	91	T	○	BLK	TL	○	634	213	7.00	7.00 - 8.00	9.2
225/45R17	94	T	○	BLK	TL	○	643	225	7.50	7.00 - 8.50	9.2
235/45R17	97	T	○	BLK	TL	○	653	236	8.00	7.50 - 9.00	9.3
225/45R18	95	T	○	BLK	TL	○	664	225	7.50	7.00 - 8.50	9.2
235/45R18	94	T	○	BLK	TL	○	678	236	8.00	7.50 - 9.00	9.3
245/45R18	100	T	○	BLK	TL	○	687	243	8.00	7.50 - 9.00	9.4
245/45R19	98	T	○	BLK	TL	○	714	243	8.00	7.50 - 9.00	9.4
205/50R17	93	T	○	BLK	TL	○	646	214	6.50	5.50 - 7.50	9.1
215/50R17	95	T	○	BLK	TL	○	652	226	7.00	6.00 - 7.50	9.2
225/50R17	98	T	○	BLK	TL	○	662	233	7.00	6.00 - 8.00	9.2
235/50R18	101	T	○	BLK	TL	○	702	245	7.50	6.50 - 8.50	9.3
185/55R15	82	T	○	BLK	TL	○	589	194	6.00	5.00 - 6.50	8.9
195/55R16	91	T	○	BLK	TL	○	624	201	6.00	5.50 - 7.00	9.0
205/55R16	94	T	○	BLK	TL	○	641	216	6.50	5.50 - 7.50	9.1
215/55R16	97	T	○	BLK	TL	○	653	228	7.00	6.00 - 7.50	9.2
215/55R17	94	T	○	BLK	TL	○	679	228	7.00	6.00 - 7.50	9.2
225/55R17	101	T	○	BLK	TL	○	690	235	7.00	6.00 - 8.00	9.3
225/55R18	98	T	○	BLK	TL	○	716	235	7.00	6.00 - 8.00	9.3
185/60R14	82	T	○	BLK	TL	○	581	189	5.50	5.00 - 6.50	8.9
185/60R15	84	T	○	BLK	TL	○	606	189	5.50	5.00 - 6.50	8.9
205/60R16	96	T	○	BLK	TL	○	655	209	6.00	5.50 - 7.50	9.1
215/60R16	99	T	○	BLK	TL	○	667	221	6.50	6.00 - 7.50	9.2
215/60R17	96	T	○	BLK	TL	○	693	221	6.50	6.00 - 7.50	9.2
225/60R17	99	T	○	BLK	TL	○	705	228	6.50	6.00 - 8.00	9.3
155/65R14	75	T	○	BLK	TL	○	558	157	4.50	4.50 - 5.50	8.6
175/65R14	82	T	○	BLK	TL	○	584	177	5.00	5.00 - 6.00	8.8
185/65R14	86	T	○	BLK	TL	○	596	189	5.50	5.00 - 6.50	8.9
175/65R15	84	T	○	BLK	TL	○	609	177	5.00	5.00 - 6.00	8.8
185/65R15	88	T	○	BLK	TL	○	621	189	5.50	5.00 - 6.50	8.9
195/65R15	91	T	○	BLK	TL	○	635	201	6.00	5.50 - 7.00	9.0
205/65R15	94	T	○	BLK	TL	○	647	209	6.00	5.50 - 7.50	9.1
205/65R16	95	T	○	BLK	TL	○	672	209	6.00	5.50 - 7.50	9.1
215/65R16	98	T	○	BLK	TL	○	686	221	6.50	6.00 - 7.50	9.2
175/70R13	82	T	○	BLK	TL	○	581	177	5.00	4.50 - 6.00	8.8
175/70R14	84	T	○	BLK	TL	○	607	177	5.00	4.50 - 6.00	8.8
185/70R14	88	T	○	BLK	TL	○	621	189	5.50	4.50 - 6.00	8.9



STUDDABLE TYRE

SP WINTER ICE 02

STEEL BELTED RADIAL

Studded passenger car tyre developed for strong traction on Ice.
It also achieves the excellent performance on snow, wet and dry conditions.



Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width [code]		Tread Depth (mm)
										Measuring	Approved	
255/35R20	97	T	○	BLK	TL	○	○	691	260	9.00	8.50 - 10.00	9.7
275/35R20	102	T	○	BLK	TL	○	○	705	278	9.50	9.00 - 11.00	9.7
225/40R18	92	T	○	BLK	TL	○	○	643	230	8.00	7.50 - 9.00	9.6
245/40R18	97	T	○	BLK	TL	○	○	659	248	8.50	8.00 - 9.50	9.7
255/40R19	100	T	○	BLK	TL	○	○	694	260	9.00	8.50 - 10.00	9.7
275/40R19	105	T	○	BLK	TL	○	○	705	278	9.50	9.00 - 11.00	9.7
245/40R20	99	T	○	BLK	TL	○	○	710	248	8.50	8.00 - 9.50	9.7
225/45R17	94	T	○	BLK	TL	○	○	640	225	7.50	7.00 - 8.50	9.6
235/45R17	97	T	○	BLK	TL	○	○	649	236	8.00	7.50 - 9.00	9.6
245/45R17	99	T	○	BLK	TL	○	○	656	243	8.00	7.50 - 9.00	9.7
225/45R18	95	T	○	BLK	TL	○	○	661	225	7.50	7.00 - 8.50	9.6
245/45R18	100	T	○	BLK	TL	○	○	683	243	8.00	7.50 - 9.00	9.7
255/45R18	103	T	○	BLK	TL	○	○	693	255	8.50	8.00 - 9.50	9.7
245/45R19	102	T	○	BLK	TL	○	○	710	243	8.00	7.50 - 9.00	9.7
195/50R15	82	T		BLK	TL	○	○	581	201	6.00	5.50 - 7.00	9.6
205/50R17	93	T		BLK	TL	○	○	643	214	6.50	5.50 - 7.50	9.6
215/50R17	95	T	○	BLK	TL	○	○	653	226	7.00	6.00 - 7.50	9.6
225/50R17	98	T	○	BLK	TL	○	○	663	233	7.00	6.00 - 8.00	9.6
235/50R18	101	T	○	BLK	TL	○	○	697	245	7.50	6.50 - 8.50	9.6
245/50R18	104	T	○	BLK	TL	○	○	707	253	7.50	7.00 - 8.50	9.7
185/55R15	86	T	○	BLK	TL	○	○	589	194	6.00	5.00 - 6.50	9.6
195/55R15	89	T	○	BLK	TL	○	○	599	201	6.00	5.50 - 7.00	9.6
195/55R16	91	T	○	BLK	TL	○	○	622	201	6.00	5.50 - 7.00	9.6
205/55R16	94	T	○	BLK	TL	○	○	634	214	6.50	5.50 - 7.50	9.6
215/55R16	97	T	○	BLK	TL	○	○	647	226	7.00	6.00 - 7.50	9.6
225/55R16	99	T	○	BLK	TL	○	○	658	233	7.00	6.00 - 8.00	9.6
215/55R17	98	T	○	BLK	TL	○	○	673	226	7.00	6.00 - 7.50	9.6
225/55R17	101	T	○	BLK	TL	○	○	685	233	7.00	6.00 - 8.00	9.6
235/55R17	103	T	○	BLK	TL	○	○	692	245	7.50	6.50 - 8.50	9.6
185/60R14	82	T		BLK	TL		○	582	189	5.50	5.00 - 6.50	9.6
185/60R15	88	T	○	BLK	TL		○	610	189	5.50	5.00 - 6.50	9.6
195/60R15	92	T	○	BLK	TL		○	620	201	6.00	5.50 - 7.00	9.6
205/60R16	96	T	○	BLK	TL		○	658	209	6.00	5.50 - 7.50	9.6
215/60R16	99	T	○	BLK	TL		○	669	221	6.50	6.00 - 7.50	9.6
155/65R14	75	T		BLK	TL		○	557	157	4.50	4.50 - 5.50	9.5
175/65R14	82	T		BLK	TL		○	588	177	5.00	5.00 - 6.00	9.6
185/65R14	90	T	○	BLK	TL		○	596	189	5.50	5.00 - 6.50	9.6
175/65R15	88	T	○	BLK	TL		○	611	177	5.00	5.00 - 6.00	9.6
185/65R15	92	T	○	BLK	TL		○	622	189	5.50	5.00 - 6.50	9.6
195/65R15	95	T	○	BLK	TL		○	639	201	6.00	5.50 - 7.00	9.6
205/65R15	94	T		BLK	TL		○	648	209	6.00	5.50 - 7.50	9.6
155/70R13	75	T		BLK	TL		○	553	157	4.50	4.00 - 5.00	9.5
175/70R13	82	T		BLK	TL		○	580	177	5.00	4.50 - 6.00	9.6
175/70R14	84	T		BLK	TL		○	606	177	5.00	4.50 - 6.00	9.6
185/70R14	92	T	○	BLK	TL		○	620	189	5.50	4.50 - 6.00	9.6
215/70R15	98	T		BLK	TL		○	689	221	6.50	5.50 - 7.00	9.6



OEM

SP SPORT MAXX A

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
255/40R18	95	Y		BLK	TL	○	663	257	8.00	8.50 - 10.00	8.0
225/45R17	90	W		BLK	TL	○	633	238	8.00	7.00 - 8.50	8.0
245/45R17	95	W		BLK	TL	○	652	243	8.00	7.50 - 9.00	8.0

SP SPORT MAXX A1

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
P245/45R19	98	V		BLK	TL	○	704	242	8.00	7.50 - 9.00	7.9
235/50R18	97	W		BLK	TL	○	697	242	7.50	6.50 - 8.50	7.9
P235/50R18	97	V		BLK	TL		697	242	7.50	6.50 - 8.50	7.9
235/55R19	101	V		BLK	TL	○	743	239	7.50	6.50 - 8.50	8.0
235/60R18	103	V		BLK	TL	○	742	242	7.50	6.50 - 8.50	8.0

SP SPORT MAXX 101

STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
245/45R19	98	Y		BLK	TL	○	707	242	8.00	7.50 - 9.00	7.9
245/45R19	102	Y	○	BLK	TL	○	707	242	8.00	7.50 - 9.00	7.9



OEM

SP SPORT MAXX 050



STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
255/35R18	90	Y		BLK	TL	○	635	260	8.50	8.50 - 10.50	7.1
265/35R19	94	Y		BLK	TL	○	671	275	9.00	9.00 - 10.50	7.5
225/40R18	88	Y		BLK	TL	○	639	236	8.00	7.50 - 9.00	7.1
235/40R19	96	Y	○	BLK	TL	○	668	244	8.00	8.00 - 9.50	7.8
225/45R18	91	W		BLK	TL	○	659	223	7.50	7.00 - 8.50	7.3
235/45R18	94	Y		BLK	TL	○	668	245	8.00	7.50 - 9.00	7.8
245/45R19	98	Y		BLK	TL	○	706	249	8.00	7.50 - 9.00	7.9
245/45R19	102	Y	○	BLK	TL	○	706	249	8.00	7.50 - 9.00	7.9
215/50R17	91	V		BLK	TL	○	648	219	7.00	6.00 - 7.50	7.3
225/50R17	94	W		BLK	TL	○	657	237	7.50	6.00 - 8.00	8.1
225/50R18	95	W		BLK	TL	○	683	236	7.50	6.00 - 8.00	8.0
215/55R17	94	V		BLK	TL	○	668	225	7.00	6.00 - 7.50	8.0
225/55R17	97	V		BLK	TL	○	679	235	7.50	6.00 - 8.00	8.0
235/55R20	102	V		BLK	TL	○	767	242	7.50	6.50 - 8.50	7.5
225/60R18	100	H		BLK	TL	○	727	232	7.00	6.00 - 8.00	8.1
235/65R18	106	V		BLK	TL	○	760	245	8.00	6.50 - 8.50	7.7

SP SPORT MAXX 050 DSST CTT



STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
* 245/40RF19	94	W	○	BLK	TL	○	677	251	8.50	8.00 - 9.50	8.0
* 255/40RF19	96	Y	○	BLK	TL	○	690	263	9.00	8.50 - 10.00	7.5

* : Run Flat Tyre

SP SPORT MAXX GT600 DSST CTT



STEEL BELTED RADIAL

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
285/35R19	103	W	○	BLK	TL	○	684	303	10.00	9.50 - 11.00	6.4
* 285/35ZRF20	100	(Y)		BLK	TL	○	710	302	10.50	9.50 - 11.00	6.3
* 255/40ZRF20	97	(Y)		BLK	TL	○	710	274	9.50	8.50 - 10.00	6.3

* : Run Flat Tyre



SP SPORT MAXX GT

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
275/35R19	96	W		BLK	TL	○	675	265	9.00	9.00 - 11.00	7.6
245/40R19	94	W		BLK	TL	○	676	251	8.50	8.00 - 9.50	7.8

SPORT MAXX RT

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
245/40R18	97	W	○	BLK	TL	○	650	251	8.50	8.00 - 9.50	7.3
235/45R17	94	W		BLK	TL	○	641	238	8.00	7.00 - 9.00	7.3

SP SPORT MAXX TT

STEEL BELTED RADIAL



**SP SPORT
MAXX TT**

Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
215/45R18	89	W		BLK	TL	○	651	218	7.00	7.00 - 8.00	7.8
245/50R18	100	W		BLK	TL	○	701	256	8.00	7.00 - 8.50	8.0



OEM

SP SPORT 7000

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
P235/45R18	94	V		BLK	TL	○	669	238	8.00	7.50 - 9.00	7.9
235/45R18	94	V		BLK	TL	○	669	238	8.00	7.50 - 9.00	7.9
185/55R16	83	H		BLK	TL	○	615	194	6.00	5.00 - 6.50	7.9
P195/55R16	86	V		BLK	TL		623	199	6.00	5.50 - 7.00	7.9
P215/55R17	93	V		BLK	TL	○	669	223	7.00	6.00 - 7.50	7.9
P225/55R18	97	V		BLK	TL		709	243	8.00	6.00 - 8.00	8.1
225/55R18	98	V		BLK	TL	○	709	243	8.00	6.00 - 8.00	8.1
225/55R18	98	H		BLK	TL	○	709	243	8.00	6.00 - 8.00	8.0
P215/60R16	94	V		BLK	TL		665	223	6.50	6.00 - 7.50	7.9

SP SPORT 5000M

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
245/40RF18	93	Y		BLK	TL	○	653	238	8.00	8.00 - 9.50	8.1
* 225/45R17	91	V		BLK	TL	○	633	238	8.00	7.00 - 8.50	8.0
245/45R17	95	V		BLK	TL	○	651	242	8.00	7.50 - 9.00	8.0
P215/45R18	89	V		BLK	TL	○	654	208	7.00	7.00 - 8.00	8.0
* P225/45R19	92	W		BLK	TL	○	686	226	7.50	7.00 - 8.50	7.8
P225/50RF17	93	V		BLK	TL	○	657	233	7.50	6.00 - 8.00	8.1
P235/50R18	97	V		BLK	TL		689	241	7.50	6.00 - 8.50	8.3
P225/55R17	95	H		BLK	TL		681	224	6.50	6.00 - 8.00	8.1
* 225/55R18	98	H		BLK	TL	○	710	231	7.00	6.00 - 8.00	8.0
* P195/65R15	89	H		BLK	TL		628	204	6.00	5.50 - 7.00	8.0

* : SP5000



OEM

SP SPORT 2050

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
225/40R18	88	Y		BLK	TL	○	○	637	231	7.50	7.50 - 9.00	8.0
255/40R18	95	Y		BLK	TL	○	○	663	255	8.50	8.50 - 10.00	8.0
195/45R16	80	W		BLK	TL	○	○	585	199	6.50	6.00 - 7.50	8.0
225/45R18	91	W		BLK	TL	○	○	660	237	8.00	7.00 - 8.50	8.0
235/45R18	94	W		BLK	TL		○	669	246	8.00	7.50 - 9.00	8.1
205/50R17	89	V		BLK	TL	○	○	637	216	7.00	5.50 - 7.50	8.2
205/50R17	93	V	○	BLK	TL	○	○	637	216	7.00	5.50 - 7.50	8.0
225/50R17	94	W		BLK	TL	○	○	658	234	7.50	6.00 - 8.00	8.1
* 205/60R16	92	H		BLK	TL		○	650	213	6.50	5.50 - 7.50	7.8

* : SP2050M

SP SPORT 2030

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
245/40R18	93	Y		BLK	TL	○	○	654	239	8.00	8.00 - 9.50	8.2
175/55R15	77	V		BLK	TL		○	574	173	5.00	5.00 - 6.00	7.6
185/55R16	83	H		BLK	TL		○	613	194	6.00	5.00 - 6.50	7.6
185/60R15	84	H		BLK	TL		○	606	188	5.50	5.00 - 6.50	7.6
175/60R16	82	H		BLK	TL		○	617	181	5.50	5.00 - 6.00	7.4
185/60R16	86	H		BLK	TL		○	628	188	5.50	5.00 - 6.50	7.4
195/60R16	89	H		BLK	TL		○	634	198	6.00	5.50 - 7.00	7.5
145/65R15	72	S		BLK	TL		○	572	138	4.00	4.00 - 5.00	6.6

THE ORIGIN AND HISTORY of DUNLOP

In 1888, John Boyd Dunlop, a Scottish Veterinarian invented the first practical pneumatic tyre.

J. B. Dunlop experimented ways to ease the discomfort of his son's tricycle and eventually came up with the air-filled or pneumatic tyre. From there, this remarkable new idea has made a great contribution to the development of contemporary automobile society.

Since then, Dunlop flourished in the world for more than 125 years.



J. B. Dunlop



Johny, son of J. B. Dunlop



Dunlop and a bicycle with pneumatic tyres.





[Left]
The first domestically
made tyre in Japan

[Right]
SP SPORT MAXX 050+
Dunlop flagship tyre.

Philosophy of Sumitomo Rubber Group

Sumitomo Rubber Group strives our best to achieve workers and consumers' satisfaction, enrich the lives of people globally, and thereby contribute to the sustainable development of society. We have a compelling desire to create a new life value for all, both now and in the future.



Headquarters of Sumitomo Rubber Group in Kobe, Japan.

Dunlop, a brand originally from Europe which pioneered the technology of pneumatic tyre is now offered by Sumitomo Rubber Group, an established company with over 100 years history.

Related Business of Sumitomo Rubber Group



Precision rubber parts



Medical rubber products



Golf and tennis goods



OEM

SP SPORT 600

■ STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
245/40R18	93	W		BLK	TL	○	○	653	248	8.50	8.00 - 9.50	7.8
245/40R18	93	Y		BLK	TL	○	○	655	245	8.50	8.00 - 9.50	7.8

SP SPORT 300

■ STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
165/55R15	75	V		BLK	TL		○	564	159	4.50	4.50 - 6.00	7.2
175/60R15	81	H		BLK	TL		○	591	178	5.50	5.00 - 6.00	7.8
205/60R15	91	H		BLK	TL		○	630	210	6.00	5.50 - 7.50	8.4
205/60R16	92	H		BLK	TL		○	652	215	6.50	5.50 - 7.50	8.1
175/65R14	82	V		BLK	TL		○	582	180	5.00	5.00 - 6.00	8.2
185/65R14	86	V		BLK	TL		○	600	183	5.50	5.00 - 6.50	7.9
185/65R15	88	H		BLK	TL		○	620	195	6.00	5.00 - 6.50	8.0
195/65R15	91	V		BLK	TL		○	638	195	6.00	5.50 - 7.00	8.4
195/65R15	91	H		BLK	TL		○	638	200	6.00	5.50 - 7.00	8.0
185/70R14	88	H		BLK	TL		○	621	194	5.50	4.50 - 6.00	8.0



OEM

SP SPORT 270

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
215/50R17	91	V		BLK	TL		○	648	221	7.00	6.00 - 7.50	8.0
225/50R17	94	V		BLK	TL		○	661	224	6.50	6.00 - 8.00	8.2
225/50R18	95	V		BLK	TL		○	685	223	6.50	6.00 - 8.00	7.9
215/55R17	94	V		BLK	TL		○	667	226	7.00	6.00 - 7.50	8.2
215/55R17	93	V		BLK	TL		○	667	226	7.00	6.00 - 7.50	8.2
225/55R17	97	W		BLK	TL		○	680	229	7.50	6.00 - 8.00	8.6
235/55R18	100	H		BLK	TL		○	716	231	7.00	6.50 - 8.50	8.2
235/55R18	99	V		BLK	TL		○	715	233	7.00	6.50 - 8.50	8.2
235/55R19	101	V		BLK	TL		○	739	241	7.50	6.50 - 8.50	8.0
215/60R17	96	H		BLK	TL		○	692	218	6.50	6.00 - 7.50	8.1
225/60R17	99	H		BLK	TL		○	699	222	6.50	6.00 - 8.00	8.6
235/60R18	103	V		BLK	TL		○	741	246	7.50	6.50 - 8.50	8.0
215/65R16	98	H		BLK	TL		○	686	223	6.50	6.00 - 7.50	8.1

SP SPORT 230

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
185/55R15	82	V		BLK	TL		○	585	192	6.00	5.00 - 6.50	8.2
215/55R17	93	V		BLK	TL	○	○	666	223	7.00	6.00 - 7.50	7.9
205/60R16	92	H		BLK	TL		○	656	211	6.00	5.50 - 7.50	7.1
205/60R16	92	V		BLK	TL		○	652	215	6.50	5.50 - 7.50	7.9
215/60R16	95	H		BLK	TL		○	662	218	6.50	6.00 - 7.50	7.9
215/60R16	95	V		BLK	TL		○	660	220	6.50	6.00 - 7.50	7.9
175/65R14	82	H		BLK	TL		○	582	188	6.00	5.00 - 6.00	7.4
195/65R15	91	V		BLK	TL		○	636	204	6.00	5.50 - 7.00	7.9



OEM

SP SPORT D8Z

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
225/60R16	97	W		BLK	TL	○	675	232	7.00	6.00 - 8.00	8.1

SP SPORT 01

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
225/45R17	91	W		BLK	TL	○	634	220	7.00	7.00 - 8.50	7.8
235/45R17	94	W		BLK	TL	○	644	236	8.00	7.50 - 9.00	8.0
265/45R21	104	W		BLK	TL	○	772	278	9.50	8.50 - 10.00	7.8
205/55R16	91	V		BLK	TL	○	632	210	6.50	5.50 - 7.50	8.3
225/60R18	100	H		BLK	TL	○	732	229	7.00	6.00 - 8.00	8.0



OEM

SP10

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
155/65R13	73	S		BLK TL		○	533	150	4.50	4.50 - 5.50	7.0
165/65R14	79	S		BLK TL		○	570	168	5.00	4.50 - 6.00	7.2
175/65R14	82	T		BLK TL		○	584	174	5.00	5.00 - 6.00	7.4
185/65R14	86	S		BLK TL		○	596	189	5.50	5.00 - 6.50	7.8
185/65R15	88	S		BLK TL		○	623	186	5.00	5.00 - 6.50	7.5
185/65R15	88	S		BLK TL		○	623	186	5.00	5.00 - 6.50	7.1
165/70R14	81	S		BLK TL		○	587	165	4.50	4.00 - 5.50	7.4
185/70R14	88	H		BLK TL			619	196	6.00	4.50 - 6.00	7.6
185/70R14	88	S		BLK TL		○	618	184	5.00	4.50 - 6.00	7.1
195/70R15	92	S		BLK TL		○	655	200	5.50	5.00 - 6.50	8.0
155/80R13	78	S		BLK TL			578	155	4.50	4.00 - 5.00	7.2
165/80R13	83	S		WLT TL			594	165	4.50	4.00 - 5.50	7.6
165/80R13	83	T		BLK TL		○	595	167	4.50	4.00 - 5.50	7.6
175/80R14	88	S		WLT TL		○	636	175	5.00	4.50 - 6.00	7.7

SP31

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
175/60R15	81	H		BLK TL		○	592	176	5.50	5.00 - 6.00	7.6
175/65R15	84	T		BLK TL		○	610	182	5.50	5.00 - 6.00	7.4
195/65R15	91	H		BLK TL		○	638	198	6.00	5.50 - 7.00	7.7



OEM

SP SPORT FASTRESPONSE

■ STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
205/55R16	91	V			○	○	632	217	6.50	5.50 - 7.50	8.1
175/65R15	84	H		BLK	TL	○	609	178	5.00	5.00 - 6.00	7.5
185/65R15	88	H		BLK	TL	○	620	191	5.50	5.00 - 6.50	7.5

ENASAVE 01 A/S

■ STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
165/65R14	79	S		BLK	TL		570	163	4.50	4.50 - 6.00	7.4



OEM

ENASAVE 2030

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
175/55R15	77	V		BLK	TL	○	574	173	5.00	5.00 - 6.00	7.6
185/55R16	83	V		BLK	TL	○	613	192	6.00	6.00 - 6.50	7.6
185/60R15	84	H		BLK	TL	○	606	195	6.00	5.00 - 6.50	7.3
145/65R15	72	S		BLK	TL	○	572	138	4.00	4.00 - 5.00	6.6

ENASAVE EC300

STEEL BELTED RADIAL



Tyre Size	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
									Measuring	Approved	
215/50R17	91	V		BLK	TL	○	650	222	6.50	6.00 - 7.50	7.7
205/55R16	91	V		BLK	TL	○	633	213	6.50	5.50 - 7.50	7.8
215/55R16	93	H		BLK	TL	○	642	226	7.00	6.00 - 7.50	7.6
185/60R15	84	H		BLK	TL	○	606	188	5.50	5.00 - 6.50	7.4
* 185/60R16	86	H		BLK	TL	○	630	189	5.50	5.00 - 6.50	7.2
* 195/60R16	89	H		BLK	TL	○	641	197	6.00	5.00 - 7.00	7.8
* 215/60R16	95	V		BLK	TL	○	666	218	6.50	6.00 - 7.50	7.9
215/60R16	95	H		BLK	TL	○	663	220	6.50	6.00 - 7.50	8.0
165/65R14	79	S		BLK	TL	○	570	162	4.50	4.50 - 6.00	7.5
165/65R14	79	M		BLK	TL	○	570	167	5.00	4.50 - 6.00	7.3
175/65R14	82	T		BLK	TL	○	584	173	5.00	5.00 - 6.00	7.4
* 175/65R14	82	T		BLK	TL	○	585	177	5.00	5.00 - 6.00	7.8
175/65R15	84	H		BLK	TL	○	615	179	5.00	5.00 - 6.00	7.2
* 185/65R15	88	T		BLK	TL	○	621	189	5.50	5.00 - 6.50	7.2
* 185/65R15	88	H		BLK	TL	○	620	188	5.50	5.00 - 6.50	8.0
* 185/65R15	88	S		BLK	TL	○	624	184	5.00	5.00 - 6.50	7.5
195/65R15	91	H		BLK	TL	○	638	195	5.50	5.50 - 7.00	8.0
* 205/65R16	95	H		BLK	TL	○	671	210	6.00	5.50 - 7.50	7.7
* 185/70R14	88	S		BLK	TL	○	614	185	5.00	4.50 - 6.00	7.5

* : EC300+

 **DUNLOP**

4×4[4WD] TYRES



DUNLOP 4x4[4WD] TYRES LINE-UP

for 4x4[4WD]



for 4x4[4WD] SAND TYRES



OWL / OUTLINED WHITE LETTER



WLT / RAISED WHITE LETTER



BLT / RAISED BLACK LETTER

SERIES	SIZE	LI		TG29	TG30	TG32	TG35	TG35 M2	TG36	TG40	TG40 M2	SP RG F	SP TGR	ST20	ST30	TG31	SGS	6 TOURING	S5
		St'd	Reinf																
40	275/40R20	102	106																
45	265/45R21	104	-																
50	235/50R18	97	101																
	255/50R19	103	107																
	245/50R20	102	-																
	255/50R20	-	109																
	265/50R20	107	111																
	275/50R20	109	113																
	285/50R20	112	116																
55	215/55R17	94	98																
	225/55R17	97	101																
	235/55R17	99	103																
	225/55R18	98	-																
	235/55R18	100	104												100H				
	255/55R18	105	109																
	235/55R19	101	105																(P)101V
	245/55R19	103	-												103S				
	255/55R19	107	111																
	275/55R19	111	-																
	60	255/60R15	102	-															
215/60R16		95	99																
235/60R16		100	104												100H				
215/60R17		96	100												96H				
225/60R17		99	103												99H, (P)98H				
235/60R17		102	106																
285/60R17		114	-																
225/60R18		100	104																
235/60R18		103	107													100H			
245/60R18		105	-																103V, (P)102V
255/60R18		108	112																
265/60R18		110	114																
275/60R18		113	117																
285/60R18		116	120																
65	255/60R19	109	113																
	215/65R16	98	102												98S, 98H, 98T				
	255/65R16	109	-																
	225/65R17	102	106													102H, T			
	235/65R17	104	108																
	245/65R17	107	111																
	255/65R17	110	114													107S			
	265/65R17	112	116																
	275/65R17	115	119																
	285/65R17	116	-																
	225/65R18	103	-													103H			
	70	235/65R18	106	110															
205/70R15		96	100						95S										
225/70R15		100	104																
235/70R15		-	-			103S													
255/70R15		108	-																
265/70R15		112	-				110S												
215/70R16		100	-				99S									99H, 100H, 99S			
225/70R16		103	107																
235/70R16		106	109																
245/70R16		107	111	107S			(P)106S (P)106T												
255/70R16		111	-																
265/70R16		112	-					112S 112H	**112S, 112S 113/111S										
275/70R16		114	-					114H	**114H										
225/70R17		-	108																
245/70R17		110	-																
265/70R17	115	-																	
265/70R18	116	-																	
75	215/75R15	100	-																
	225/75R15	102	106																
	235/75R15	105	109							105S									
	225/75R16	104	108																
	245/75R16	111	-																
	265/75R16	116	-																
	285/75R16	-	-																
	245/75R17	112	-																*112H
80	195/80R15	96	100	94S															
	215/80R15	102	106			100S													
	175/80R16	-	-																
	205/80R16	100	104																
	215/80R16	-	-							107S									
	235/80R16	109	-							109S									
	185/80R17	-	-					99M											
85	235/85R16	-	-																114/111R
	245/85R16	-	-																
	235/95R15	-	-																114S
95	225/95R16	-	-																116R
	205R16	-	-																118/116R
Metric	205R16	-	-			110/108R 106/104N						106/104N	110/108N 104Q						
	215R15	-	-			113/111R													
Flotation	30X9.50R15	96	104																
	31X10.50R15	100	109																
	32X11.50R15	104	113																
	33X12.50R15	100	108																
Others	7.50R16	-	-																112/107R
	9.00-15	-	-																
	10R15	-	-																
	255/90D16	-	-																115P, 119P

*=SP ROADGRIPPER S



4x4 (4WD) TYRES

SP SPORT MAXX 050+



STEEL BELTED RADIAL

SP SPORT MAXX 050+ is Dunlop's flagship tyre with enhanced high speed stability and cornering performance. Pattern design and compound enhance performance on Dry and Wet road surfaces.

**SP SPORT
MAXX 050+**

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
325/30R21		108	Y	○	BLK	TL	○	○	729	331	11.50	11.00 - 12.00	7.1
295/30R22		103	Y	○	BLK	TL	○	○	737	301	10.50	10.00 - 11.00	7.5
315/35R20		110	Y	○	BLK	TL	○	○	728	320	11.00	10.50 - 12.50	7.3
285/35R21		105	Y	○	BLK	TL	○	○	733	290	10.00	9.50 - 11.00	7.5
295/35R21		107	Y	○	BLK	TL	○	○	739	301	10.50	10.00 - 11.50	7.5
275/40R20		106	Y	○	BLK	TL	○	○	728	278	9.50	9.00 - 11.00	7.7
295/40R20		110	Y	○	BLK	TL	○	○	744	301	10.50	10.00 - 11.50	7.5
295/40R21		111	W	○	BLK	TL	○	○	769	301	10.50	10.00 - 11.50	7.5
275/45R19		108	Y	○	BLK	TL	○	○	731	273	9.00	8.50 - 10.50	7.7
285/45R19		111	W	○	BLK	TL	○	○	739	285	9.50	9.00 - 10.50	7.5
245/45R20		103	Y	○	BLK	TL	○	○	728	243	8.00	7.50 - 9.00	7.9
255/45R20		105	Y	○	BLK	TL	○	○	738	255	8.50	8.00 - 9.50	7.9
275/45R20		110	Y	○	BLK	TL	○	○	756	273	9.00	8.50 - 10.50	7.7
255/50R19		107	Y	○	BLK	TL	○	○	739	264	8.00	7.00 - 9.00	7.9
265/50R19		110	Y	○	BLK	TL	○	○	749	277	8.50	7.50 - 9.50	7.7
255/50R20		109	Y	○	BLK	TL	○	○	764	264	8.00	7.00 - 9.00	7.9
265/50R20		111	Y	○	BLK	TL	○	○	774	277	8.50	7.50 - 9.50	7.7
275/50R20		109	W	○	BLK	TL	○	○	784	284	8.50	7.50 - 9.50	7.7
275/55R17		109	W	○	BLK	TL	○	○	734	284	8.50	7.50 - 9.50	7.7
225/55R18		102	Y	○	BLK	TL	○	○	705	233	7.00	6.00 - 8.00	7.9
255/55R18		109	Y	○	BLK	TL	○	○	737	264	8.00	7.00 - 9.00	7.9
255/55R19		111	W	○	BLK	TL	○	○	763	264	8.00	7.00 - 9.00	7.9
275/55R19		111	W	○	BLK	TL	○	○	785	284	8.50	7.50 - 9.50	7.7
255/60R17		106	V	○	BLK	TL	○	○	738	260	7.50	7.00 - 9.00	7.9
235/60R18		107	W	○	BLK	TL	○	○	739	239	7.00	6.50 - 8.50	7.9
245/60R18		105	V	○	BLK	TL	○	○	751	248	7.00	7.00 - 8.50	7.9
235/65R17		108	W	○	BLK	TL	○	○	738	240	7.00	6.50 - 8.50	7.9



4x4 (4WD) TYRES

GRANDTREK AT3



GRANDTREK AT3

STEEL BELTED RADIAL

3rd generation of all-round type 4x4 radial tyre which adopts "DIGITAL ROLLING SIMULATION" Technology.

Developed to achieve excellent balance to on and off road performance.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
255/55R18		109	H	○	BLT	TL	○	○	739	263	8.00	7.00 - 9.00	9.1
235/60R16		100	H		BLT	TL	○	○	686	243	7.00	6.50 - 8.50	9.6
215/60R17		96	H		BLT	TL	○	○	691	220	6.50	6.00 - 7.50	8.2
235/60R17		102	H		BLT	TL	○	○	718	242	7.00	6.50 - 8.50	8.6
235/60R18		103	H		BLT	TL	○	○	743	240	7.00	6.50 - 8.50	8.6
255/60R18		112	H	○	BLT	TL	○	○	766	262	7.50	7.00 - 9.00	9.1
265/60R18		110	H		BLT	TL	○	○	779	269	8.00	7.50 - 9.50	9.1
285/60R18		120	H		BLT	TL	○	○	801	287	8.50	8.00 - 10.00	10.1
215/65R16		98	H		BLT	TL	○	○	686	219	6.50	6.00 - 7.50	9.1
255/65R16		109	H		BLT	TL	○	○	743	253	7.50	7.00 - 9.00	10.1
225/65R17		102	H		BLT	TL	○	○	725	225	6.50	6.00 - 8.00	9.6
235/65R17		108	H	○	BLT	TL	○	○	740	240	7.00	6.50 - 8.50	9.1
245/65R17		107	H		BLT	TL	○	○	757	243	7.00	7.00 - 8.50	10.1
245/65R17		111	S	○	BLT	TL	○	○	757	242	7.00	7.00 - 8.50	10.1
265/65R17		112	S		BLT	TL	○	○	782	270	8.00	7.50 - 9.50	10.1
275/65R17		115	H		BLT	TL	○	○	797	277	8.00	7.50 - 9.50	10.6
285/65R17		116	H		BLT	TL	○	○	804	296	8.50	8.00 - 10.00	9.6
205/70R15		96	T		BLT	TL	○	○	668	209	6.00	5.00 - 7.00	9.1
225/70R15		100	T		OWL	TL	○	○	695	235	6.50	6.00 - 7.50	9.6
265/70R15		112	T		OWL	TL	○	○	754	279	8.00	7.00 - 9.00	10.1
215/70R16		100	T		BLT	TL	○	○	711	222	6.50	5.50 - 7.00	9.6
225/70R16		103	T		OWL	TL	○	○	723	231	6.50	6.00 - 7.50	9.6
245/70R16		111	T		OWL	TL	○	○	751	248	7.00	6.50 - 8.00	10.1
255/70R16		111	T		OWL	TL	○	○	764	259	7.50	6.50 - 8.50	10.1
265/70R16		112	T		OWL	TL	○	○	779	279	8.00	7.00 - 9.00	10.1
LT265/70R16		117/114	T		BLT	TL	○	○	773	265	8.00	7.00 - 8.50	11.0
275/70R16		114	T		OWL	TL	○	○	794	281	8.00	7.00 - 9.00	10.6
225/70R17		108	S		BLT	TL	○	○	754	233	6.50	6.00 - 7.50	9.6
LT215/75R15	6	100/97	S		OWL	TL	○	○	707	219	6.00	5.50 - 7.00	11.8
235/75R15		109	T	○	BLT	TL	○	○	732	238	6.50	6.00 - 8.00	9.6
LT235/75R15	6	104/101	S		OWL	TL	○	○	736	240	6.50	6.00 - 8.00	12.3
LT225/75R16	8	110/107	S		OWL	TL	○	○	748	223	6.00	6.00 - 7.00	12.0
LT245/75R16	8	114/111	S		OWL	TL	○	○	776	254	7.00	6.50 - 8.00	12.5
LT265/75R16	6	112/109	S		OWL	TL	○	○	808	271	7.50	7.00 - 8.00	12.8
LT285/75R16	8	122/119	Q		OWL	TL	○	○	838	288	8.00	7.50 - 9.00	13.2
LT235/85R16	10	120/116	R		BLT	TL	○	○	808	241	6.50	6.00 - 7.50	12.2
30X9.50R15	6	104	S		OWL	TL	○	○	753	250	7.50	6.50 - 8.50	12.5
31X10.50R15	6	109	S		OWL	TL	○	○	777	283	8.50	7.00 - 9.00	12.8



4x4 (4WD) TYRES

GRANDTREK AT3G



STEEL BELTED RADIAL

GRANDTREK AT3G is the stiffest construction in the history of GRANDTREK. High rigidity over layers give better driving performance on unpaved road.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
265/60R18		114	S	○	BLK	TL	○	775	270		7.50 - 9.50	9.6
LT265/65R17		120/117	R		BLK	TL	○	776	270		7.50 - 9.50	12.0
LT275/65R17		121/118	R		BLK	TL	○	790	277		7.50 - 9.50	12.5
285/65R17		116	S		BLK	TL	○	802	290		8.00 - 10.00	10.1
245/70R16		111	S	○	BLK	TL	○	750	246		6.50 - 8.00	11.5
LT265/70R16		121/118	R		BLK	TL	○	778	270		7.00 - 8.50	12.5
LT265/70R17		121/118	R		BLK	TL	○	804	270		7.00 - 8.50	12.5
LT285/70R17		121/118	R		BLK	TL	○	838	290		7.50 - 9.00	13.4
LT245/75R16	10	120/116	Q		BLK	TL	○	774	246		6.50 - 8.00	11.5
LT265/75R16	10	123/120	Q		BLK	TL	○	804	265		7.00 - 8.00	12.5
LT235/85R16		120/116	R		BLK	TL	○	806	233		6.00 - 7.50	12.5
30X9.50R15LT		104	S		BLK	TL	○	750	238		6.50 - 8.50	11.5
31X10.50R15LT		109	S		BLK	TL	○	775	266		7.00 - 9.00	12.5

GRANDTREK AT2

STEEL BELTED RADIAL

The GRANDTREK AT2 is an all-round type 4x4 radial tyre which adopts DUNLOP's own "DIGITAL ROLLING SIMULATION" technology and has been developed to achieve excellent balance of on and off road performance.

**GRANDTREK
AT2**



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
P285/65R17		115	S		OWL	TL	○	804	289	8.50	8.00 - 10.00	10.1
P235/70R16		104	S		BLT	TL	○	741	235	7.00	6.00 - 8.00	9.6
* 265/70R16		115	R		BLT	TL	○	778	272	8.00	7.00 - 9.00	10.2
* P225/75R15		102	S		OWL	TL	○	721	225	6.00	6.00 - 7.50	9.9
195/80R15		96	S		BLT	TL	○	694	199	5.50	5.00 - 6.50	9.1
215/80R15		101	S		OWL	TL	○	725	215	6.00	5.50 - 7.00	9.6
175/80R16		91	S		BLT	TL	○	688	174	5.00	4.50 - 6.00	8.6
215/80R16		103	S		BLT	TL	○	751	219	6.00	5.50 - 7.00	9.6
* 30X9.50R15	6	104	Q		WLT	TL		752	240	7.50	6.50 - 8.50	12.5
* 31X10.50R15	6	109	Q		WLT	TL		778	275	8.50	7.00 - 9.00	12.8
* 32X11.50R15	6	113	N		OWL	TL		803	285	9.00	8.00 - 10.00	13.2

*=GRANDTREK AT1



GRANDTREK AT1



4x4 (4WD) TYRES

GRANDTREK PT3

STEEL BELTED RADIAL

An on-road SUV tyre balances high-level of driving performance and environmentally friendly performance of fuel-saving and long life.



**GRANDTREK
PT3**

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
* 275/50R21		113	V		TL		○	808	286	8.50	7.50 - 9.50	8.2
225/55R18		98	V		TL		○	704	229	7.00	6.00 - 8.00	8.0
235/55R18		100	V		TL		○	715	243	7.50	6.50 - 8.50	8.0
255/55R18		109	V	○	TL		○	738	262	8.00	7.00 - 9.00	8.2
235/55R19		101	V		TL		○	741	246	7.50	6.50 - 8.50	8.7
245/55R19		103	V		TL		○	753	245	7.50	7.00 - 8.50	8.1
215/60R16		95	H		TL		○	664	218	6.50	6.00 - 7.50	8.4
235/60R16		100	H		TL		○	688	233	7.00	6.50 - 8.50	8.6
215/60R17		96	H		TL		○	689	215	6.50	6.00 - 7.50	8.4
225/60R17		99	V		TL		○	702	223	6.50	6.00 - 8.00	7.9
225/60R18		100	H		TL		○	726	222	6.50	6.00 - 8.00	8.5
235/60R18		107	V	○	TL		○	739	233	7.00	6.50 - 8.50	7.9
255/60R18		112	V	○	TL		○	763	260	7.50	7.00 - 9.00	8.4
265/60R18		110	H		TL		○	775	272	8.00	7.50 - 9.50	9.4
265/60R18		110	V		TL		○	777	273	8.00	7.50 - 9.50	9.4
285/60R18		116	V		TL		○	799	290	8.50	8.00 - 10.00	8.6
215/65R16		98	H		TL		○	686	219	6.50	6.00 - 7.50	8.5
225/65R17		102	H		TL		○	724	228	6.50	6.00 - 8.00	8.6
225/65R17		102	V		TL		○	724	226	6.50	6.00 - 8.00	7.9
235/65R17		108	V	○	TL		○	738	238	7.00	6.50 - 8.50	8.1
245/65R17		107	H		TL		○	750	248	7.00	7.00 - 8.50	8.8
265/65R17		112	H		TL		○	777	270	8.00	7.50 - 9.50	9.0
275/65R17		115	H		TL		○	790	277	8.00	7.50 - 9.50	9.1
205/70R15		96	H		TL		○	669	207	6.00	5.00 - 7.00	8.7
215/70R15		98	H		TL		○	683	219	6.50	5.50 - 7.00	8.8
215/70R16		100	H		TL		○	708	219	6.50	5.50 - 7.00	8.8
225/70R16		103	H		TL		○	722	226	6.50	6.00 - 7.50	8.9
235/70R16		106	H		TL		○	736	238	7.00	6.00 - 8.00	9.0
245/70R16		111	S	○	TL		○	749	246	7.00	6.50 - 8.00	9.4
265/70R16		112	H		TL		○	776	270	8.00	7.00 - 9.00	9.6
265/70R17		115	S		TL		○	804	272	8.00	7.00 - 9.00	9.6

*=PT3A



4x4 (4WD) TYRES

GRANDTREK MT1

STEEL BELTED RADIAL

A mud battling 4x4 tyre for both on and off road. The edges grip the road surface and self-cleaning of tread provide powerful traction even in mud and gravel.



GRANDTREK MT1

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
30X9.50R15	6	104	N		WLT	TL	○	756	250	7.50	6.50 - 8.50	14.4
31X10.50R15	6	109	N		WLT	TL	○	782	273	8.50	7.00 - 9.00	14.4
32X11.50R15	6	113	N		WLT	TL	○	805	290	9.00	8.00 - 10.00	14.9
33X12.50R15	6	108	N		WLT	TL	○	829	324	10.00	8.50 - 11.00	14.9



4x4 (4WD) TYRES

GRANDTREK MT2

① WIDE PATTERN

② NARROW PATTERN

STEEL BELTED RADIAL

The GRANDTREK MT2 is real off-road tyre for dirt, rock, and mud conditions.

- ① Wide tread has enhanced off-road performance (mud & dirt) and on-road performance (wet traction, noise & ride comfort).
- ② Narrow tread is superior in mud running performance.



**GRANDTREK
MT2**

① WIDE PATTERN

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)	
										Measuring	Approved		
265/70R16		112	Q		BLK	TL	○	○	778	263	8.00	7.00 - 9.00	14.4
LT225/75R16		103/100	Q		OWL	TL	○	○	753	218	6.00	6.00 - 7.00	13.4
LT225/75R16		115/112	Q		BLK	TL	○	○	754	215	6.00	6.00 - 7.00	13.4
LT245/75R16		108/104	Q		OWL	TL	○	○	782	247	7.00	6.50 - 8.00	13.9
LT245/75R16		120/116	Q		BLK	TL	○	○	787	241	7.00	6.50 - 8.00	13.9
LT265/75R16	6	112/109	Q		OWL	TL	○	○	812	267	7.50	7.00 - 8.00	14.4
LT285/75R16	6	116/113	Q		OWL	TL	○	○	842	287	8.00	7.50 - 9.00	14.9
LT285/75R16		126/123	Q		BLK	TL	○	○	841	278	8.00	7.50 - 9.00	14.9

② NARROW PATTERN

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)	
										Measuring	Approved		
LT235/85R16	6	108/104	Q		OWL	TL	○	○	816	244	6.50	6.00 - 7.50	13.9

STUDLESS TYRE

WINTER MAXX SJ8

STEEL BELTED RADIAL

Latest development of studless winter tyre for SUV.
New compound created by 4 D Nano design.
Increased density by New Miura-ori sipes .



**WINTER MAXX
SJ8**

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
275/40R20		106	R	○	BLK	TL	○	728	277	9.50	9.00 - 11.00	11.0
275/45R20		110	R	○	BLK	TL	○	753	267	9.00	8.50 - 10.50	11.0
265/45R21		104	R		BLK	TL	○	771	265	9.00	8.50 - 10.00	11.0
235/50R18		97	R		BLK	TL	○	693	244	7.50	6.50 - 8.50	10.8

Continued next page.



STUDLESS TYRE

WINTER MAXX SJ8

STEEL BELTED RADIAL

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	BLK	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
255/50R19		107	R	○	BLK	TL	○		739	264	8.00	7.00 - 9.00	11.0
245/50R20		102	R		BLK	TL	○		754	252	7.50	7.00 - 8.50	10.8
255/50R20		109	R	○	BLK	TL	○		764	264	8.00	7.00 - 9.00	11.0
265/50R20		107	R		BLK	TL	○		774	276	8.50	7.50 - 9.50	11.0
275/50R20		109	R		BLK	TL	○		784	283	8.50	7.50 - 9.50	11.0
285/50R20		112	R		BLK	TL	○		794	296	9.00	8.00 - 10.00	11.0
275/50R21		113	R	○	BLK	TL	○		808	285	8.50	7.50 - 9.50	11.0
225/55R17		97	R		BLK	TL	○		680	232	7.00	6.00 - 8.00	10.8
235/55R17		99	R		BLK	TL	○		690	244	7.50	6.50 - 8.50	10.8
225/55R18		98	R		BLK	TL	○		705	231	7.00	6.00 - 8.00	10.8
235/55R18		100	R		BLK	TL	○		715	244	7.50	6.50 - 8.50	10.8
255/55R18		109	R	○	BLK	TL	○		737	262	8.00	7.00 - 9.00	11.2
235/55R19		101	R		BLK	TL	○		741	244	7.50	6.50 - 8.50	10.8
245/55R19		103	R		BLK	TL	○		753	252	7.50	7.00 - 8.50	10.8
255/55R19		111	R	○	BLK	TL	○		763	264	8.00	7.00 - 9.00	11.0
275/55R19		111	R		BLK	TL	○		785	283	8.50	7.50 - 9.50	11.0
235/60R16		100	R		BLK	TL	○		688	236	7.00	6.50 - 8.50	10.8
215/60R17		96	R		BLK	TL	○		690	220	6.50	6.00 - 7.50	10.8
225/60R17		99	R		BLK	TL	○		702	227	6.50	6.00 - 8.00	10.8
235/60R17		102	R		BLK	TL	○		714	236	7.00	6.50 - 8.50	10.8
225/60R18		100	R		BLK	TL	○		727	227	6.50	6.00 - 8.00	10.8
235/60R18		107	R	○	BLK	TL	○		739	239	7.00	6.50 - 8.50	10.8
245/60R18		105	R		BLK	TL	○		751	247	7.00	7.00 - 8.50	10.8
255/60R18		112	R	○	BLK	TL	○		763	259	7.50	7.00 - 9.00	11.0
265/60R18		110	R		BLK	TL	○		775	271	8.00	7.50 - 9.50	11.2
285/60R18		116	R		BLK	TL	○		799	291	8.50	8.00 - 10.00	11.2
215/65R16		98	R		BLK	TL	○		686	220	6.50	6.00 - 7.50	10.8
255/65R16		109	R		BLK	TL	○		738	259	7.50	7.00 - 9.00	10.8
225/65R17		102	R		BLK	TL	○		723	228	6.50	6.00 - 8.00	10.8
235/65R17		108	R	○	BLK	TL	○		738	239	7.00	6.50 - 8.50	10.8
245/65R17		107	R		BLK	TL	○		750	247	7.00	7.00 - 8.50	10.8
255/65R17		110	R		BLK	TL	○		764	259	7.50	7.00 - 9.00	10.8
265/65R17		112	R		BLK	TL	○		777	275	8.00	7.50 - 9.50	11.2
275/65R17		115	R		BLK	TL	○		790	278	8.00	7.50 - 9.50	11.2
285/65R17		116	R		BLK	TL	○		802	291	8.50	8.00 - 10.00	10.8
225/65R18		103	R		BLK	TL	○		749	228	6.50	6.00 - 8.00	10.8
235/65R18		106	R		BLK	TL	○		763	239	7.00	6.50 - 8.50	10.8
205/70R15		96	R		BLK	TL	○		669	208	6.00	5.00 - 7.00	10.8
225/70R15		100	R		BLK	TL	○		697	226	6.50	6.00 - 7.50	10.8
215/70R16		100	R		BLK	TL	○		708	220	6.50	5.50 - 7.00	10.8
225/70R16		103	R		BLK	TL	○		723	227	6.50	6.00 - 7.50	10.8
235/70R16		106	R		BLK	TL	○		736	239	7.00	6.00 - 8.00	10.8
245/70R16		107	R		BLK	TL	○		750	247	7.00	6.50 - 8.00	10.8
265/70R16		112	R		BLK	TL	○		778	271	8.00	7.00 - 9.00	11.2
275/70R16		114	R		BLK	TL	○		792	278	8.00	7.00 - 9.00	11.2
225/75R16		104	R		BLK	TL	○		742	222	6.00	6.00 - 7.50	10.8



STUDDABLE TYRE

GRANDTREK ICE02

STEEL BELTED RADIAL

CUV and SUV studded tyre developed for strong traction on Ice.
It also achieves excellent performance on snow, wet and dry conditions.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
315/35R20		110	T	○	BLK	TL	○	○	733	321	11.00	10.50 - 12.50	10.2
275/40R20		106	T	○	BLK	TL	○	○	730	278	9.50	9.00 - 11.00	9.7
285/45R19		111	T	○	BLK	TL	○	○	743	285	9.50	9.00 - 10.50	10.2
265/45R21		104	T		BLK	TL	○	○	775	266	9.00	8.50 - 10.00	10.2
255/50R19		107	T	○	BLK	TL	○	○	743	265	8.00	7.00 - 9.00	10.2
245/50R20		102	T		BLK	TL	○	○	758	253	7.50	7.00 - 8.50	10.2
265/50R20		111	T	○	BLK	TL	○	○	778	277	8.50	7.50 - 9.50	10.2
275/50R20		109	T		BLK	TL	○	○	788	284	8.50	7.50 - 9.50	10.2
285/50R20		116	T	○	BLK	TL	○	○	798	297	9.00	8.00 - 10.00	10.2
225/55R18		102	T	○	BLK	TL	○	○	711	233	7.00	6.00 - 8.00	10.2
235/55R18		104	T	○	BLK	TL	○	○	717	245	7.50	6.50 - 8.50	10.2
255/55R18		109	T	○	BLK	TL	○	○	739	265	8.00	7.00 - 9.00	10.2
235/55R19		105	T	○	BLK	TL	○	○	743	245	7.50	6.50 - 8.50	10.2
245/55R19		103	T		BLK	TL	○	○	755	253	7.50	7.00 - 8.50	10.2
255/55R19		111	T	○	BLK	TL	○	○	765	265	8.00	7.00 - 9.00	10.2
275/55R19		111	T		BLK	TL	○	○	787	284	8.50	7.50 - 9.50	10.2
215/60R17		100	T	○	BLK	TL		○	695	221	6.50	6.00 - 7.50	9.6
225/60R17		103	T	○	BLK	TL		○	707	228	6.50	6.00 - 8.00	10.2
235/60R17		106	T	○	BLK	TL		○	720	240	7.00	6.50 - 8.50	10.2
225/60R18		104	T	○	BLK	TL		○	732	228	6.50	6.00 - 8.00	10.2
235/60R18		107	T	○	BLK	TL		○	744	240	7.00	6.50 - 8.50	10.2
245/60R18		105	T		BLK	TL		○	756	248	7.00	7.00 - 8.50	10.2
255/60R18		112	T	○	BLK	TL		○	759	260	7.50	7.00 - 9.00	10.2
265/60R18		114	T	○	BLK	TL		○	772	272	8.00	7.50 - 9.50	10.2
285/60R18		116	T		BLK	TL		○	797	292	8.50	8.00 - 10.00	10.2
215/65R16		102	T	○	BLK	TL		○	687	221	6.50	6.00 - 7.50	10.2
225/65R17		106	T	○	BLK	TL		○	725	228	6.50	6.00 - 8.00	10.2
235/65R17		108	T	○	BLK	TL		○	739	240	7.00	6.50 - 8.50	10.2
245/65R17		111	T	○	BLK	TL		○	751	248	7.00	7.00 - 8.50	10.2
255/65R17		110	T		BLK	TL		○	765	260	7.50	7.00 - 9.00	10.2
265/65R17		116	T	○	BLK	TL		○	780	272	8.00	7.50 - 9.50	10.2
275/65R17		115	T		BLK	TL		○	794	279	8.00	7.50 - 9.50	10.2
285/65R17		116	T		BLK	TL		○	804	292	8.50	8.00 - 10.00	10.2
235/65R18		110	T	○	BLK	TL		○	764	240	7.00	6.50 - 8.50	10.2
205/70R15		100	T	○	BLK	TL		○	673	209	6.00	5.00 - 7.00	10.2
215/70R16		100	T		BLK	TL		○	713	221	6.50	5.50 - 7.00	10.2
225/70R16		107	T	○	BLK	TL		○	725	228	6.50	6.00 - 7.50	10.2
235/70R16		106	T		BLK	TL		○	741	240	7.00	6.00 - 8.00	10.2
245/70R16		107	T		BLK	TL		○	755	248	7.00	6.50 - 8.00	10.2
265/70R16		112	T		BLK	TL		○	776	272	8.00	7.00 - 9.00	10.2
275/70R16		114	T		BLK	TL		○	791	279	8.00	7.00 - 9.00	10.2
235/75R15		109	T	○	BLK	TL		○	731	235	6.50	6.00 - 8.00	10.2



4x4 (4WD) TYRES

GRANDTREK AT20

STEEL BELTED RADIAL

Developed for luxury SUVs, Demonstrates smooth ride on the highway and provides some off road use as well.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
205R16C	8PR	110/108	R		BLK	TL		○	735	209	6.00	5.50 - 6.50	9.4
P225/60R18		99	H		BLK	TL		○	730	231	7.00		8.2
265/60R18		110	H		BLK	TL		○	778	266	8.00	7.50 - 9.50	8.7
245/65R17		111	S	○	BLK	TL		○	752	243	7.00	7.00 - 8.50	9.0
265/65R17		112	S		BLK	TL		○	777	268	8.00	7.50 - 9.50	8.7
P265/65R17		110	S		BLK	TL		○	775	265	8.00	7.50 - 9.50	8.7
275/65R17		115	H		BLK	TL		○	793	277	8.00	7.50 - 9.50	9.2
245/70R16		111	S		BLK	TL		○	751	248	7.00	6.50 - 8.00	8.5
255/70R16		111	H		BLK	TL		○	763	254	7.50	6.50 - 8.50	8.7
255/70R16		111	T		BLK	TL		○	764	255	7.50	6.50 - 8.50	8.5
LT255/70R16		108/104	S		BLK	TL			766	255	7.50	6.50 - 8.00	8.7
265/70R16		112	S		BLK	TL		○	776	259	8.00	7.00 - 9.00	8.7
275/70R16		114	H		BLK	TL		○	794	276	8.00	7.00 - 9.00	9.2
225/70R17C		108/106	S		BLK	TL		○	758	227	6.00	6.00 - 7.50	9.2
225/70R17		108	S	○	BLK	TL		○	761	223	6.50	6.00 - 7.50	9.2
245/70R17		110	S		BLK	TL		○	778	251	7.00	6.50 - 8.00	9.0
P265/70R17		113	S		BLK	TL		○	801	270	8.00	7.00 - 9.00	8.7
205/80R16		104	S	○	BLK	TL		○	734	212	6.00	5.00 - 7.00	9.4

GRANDTREK AT22

STEEL BELTED RADIAL

Developed for luxury SUVs. Its sophisticated design provides excellent performance on the highway as well as limited off road capability.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
265/60R18		110	H		BLK	TL		○	780	266	8.00	7.50 - 9.50	9.5
285/60R18		116	V		BLK	TL		○	802	288	8.50	8.00 - 10.00	9.7
265/65R17		112	T		BLK	TL		○	777	272	8.00	7.50 - 9.50	9.5
275/65R17		115	T		OWL	TL		○	792	282	8.00	7.50 - 9.50	10.2
285/65R17		116	H		BLK	TL		○	802	287	8.50	8.00 - 10.00	10.2
265/70R17		115	S		BLK	TL		○	800	269	7.50	7.00 - 9.00	9.9
235/75R15		109	S	○	BLK	TL		○	733	238	6.50	6.00 - 8.00	11.5
265/75R16		116	S		BLK	TL		○	800	262	7.50	7.00 - 9.00	10.2



GRANDTREK AT23

STEEL BELTED RADIAL

Tyres for the users who appreciate the performance on the highway. Offers quiet and smooth ride as well as high speed stability and durability.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
275/60R18		112	H		BLK	TL		790	277	8.00	7.50 - 9.50	9.2
275/60R18		113	H		BLK	TL	○	790	277	8.00	7.50 - 9.50	9.2
P275/60R18		111	H		BLK	TL		789	278	8.00	7.50 - 9.50	9.2
285/60R18		116	V		BLK	TL	○	803	282	8.00	8.00 - 10.00	9.2
P285/60R18		114	V		BLK	TL		803	282	8.00	8.00 - 10.00	9.2
275/60R20		115	H		BLK	TL	○	839	278	8.00	7.50 - 9.50	9.1
275/65R17		115	H		BLK	TL	○	793	277	8.00	7.50 - 9.50	9.2
275/70R16		114	H		OWL	TL	○	794	276	8.00	7.00 - 9.00	9.2
265/70R18		116	H		BLK	TL		828	277	8.00	7.00 - 9.00	9.0

GRANDTREK AT25

STEEL BELTED RADIAL

AT25 is developed to achieve better off-road performance and reduced pass-by noise.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
255/60R18		108	H		BLK	TL	○	766	257	7.00	7.00 - 9.00	8.7
265/60R18		110	H		BLK	TL	○	779	267	8.00	7.50 - 9.50	8.7
285/60R18		116	V		BLK	TL	○	801	288	8.50	8.00 - 10.00	9.7
255/65R17		110	S		BLK	TL	○	765	253	7.50	7.00 - 9.00	8.4
265/65R17		112	S		BLK	TL	○	774	273	8.00	7.50 - 9.50	8.7

GENERAL INFORMATION

DUNLOP offers a wide range of tyres. This PATTERN DIGEST is designed to help users select the most suitable tyres which meet their needs. Useful information is included to assist users in selecting appropriate tyre specifications for their vehicles with ease. Inquiries and requests for additional information should be directed to the nearest DUNLOP dealers or DUNLOP representatives. DUNLOP tyres are designed in line with The Japan Automobile Tyre Manufacturers Association, Inc.(JATMA), The Tire and Rim Association, Inc.(TRA) or The European Tyre and Rim Technical Organization[ETRTO]standards.

BASIC TYRE FUNCTIONS

Basic tyre functions are the capability to support a given load up to a given speed and to transmit the driving, steering and braking forces to the ground.

DIMENSIONS

RIM WIDTH

Distance between the flanges of the rim.

SECTION HEIGHT

Half the distance between the overall diameter and the nominal rim diameter.

SECTION WIDTH

The distance between the outsides of the sidewalls of an inflated tyre excluding any labeling (markings), decorations, or protective bands or ribs.

OVERALL WIDTH

The distance between the outsides of the sidewalls of an inflated tyre including any labeling (markings), decorations, or protective bands or ribs.

OVERALL DIAMETER

The diameter of an inflated tyre at the outermost surface of the tread.

NOMINAL RIM DIAMETER

It is a size code for reference only, as indicated in the tyre and rim designation.

NOMINAL ASPECT RATIO

The percentage ratio of the section height to the section width of the tyre on its design rim.

SIDEWALL DESCRIPTION

SERVICE DESCRIPTION

In addition to the Tyre Size Designation a tyre may include a Service Description consisting of a load index (or two Load Indices in the case of single/dual fitments) and a speed symbol.

LOAD CAPACITY

The maximum load a tyre is permitted to carry under specified operating conditions.

INFLATION PRESSURE

Inflation pressure means the pressure measured with the tyre at ambient temperature without any pressure build-up due to tyre usage.

M+S

Tyres specifically designed for mud and snow (Winter)use. MS, M&S, M,S and M-S are also permitted.

SPEED SYMBOL

The SPEED SYMBOL indicates the maximum speed at which the tyre can carry the load corresponding to its Load Index under service conditions specified by the tyre manufacturer.

LOAD INDEX


The LOAD INDEX is a numerical code associated with the maximum load a tyre is permitted to carry at the speed indicated by its Speed Symbol under service conditions specified by the tyre manufacturer.

REINFORCED (EXTRA LOAD)

Passenger car tyres and/or motorcycle tyres designated for loads and inflation pressure higher than the Standard versions.

TEMPORARY USE ONLY

Passenger car tyres intended for temporary use as spare in only one position at a time.

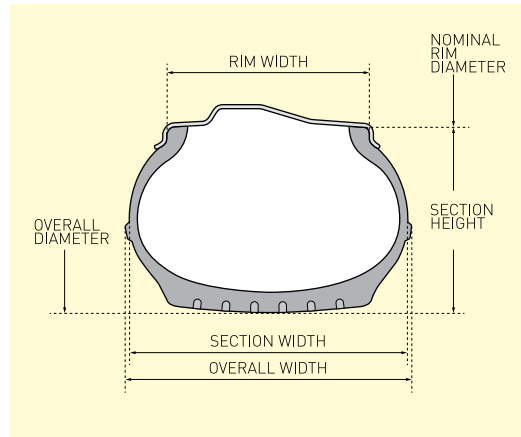

SPEED SYMBOL

The SPEED SYMBOL indicates the maximum speed at which the tyre can carry the load corresponding to its Load Index under service conditions specified by the tyre manufacturer.

SPEED SYMBOL	MAX.SPEED (km/h)
A1	5
A2	10
A3	15
A4	20
A5	25
A6	30
A7	35
A8	40
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300
(Y)	above 300
Speed Category Marking	
ZR	above 240

LOAD INDEX

The LOAD INDEX is a numerical code associated with the maximum load a tyre is permitted to carry at the speed indicated by its Speed Symbol under service conditions specified by the tyre manufacturer.

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
0	45.0	40	140	80	450	120	1,400	160	4,500	200	14,000	240	45,000		
1	46.2	41	145	81	462	121	1,450	161	4,625	201	14,500	241	46,250		
2	47.5	42	150	82	475	122	1,500	162	4,750	202	15,000	242	47,500		
3	48.7	43	155	83	487	123	1,550	163	4,875	203	15,500	243	48,750		
4	50.0	44	160	84	500	124	1,600	164	5,000	204	16,000	244	50,000		
5	51.5	45	165	85	515	125	1,650	165	5,150	205	16,500	245	51,500		
6	53.0	46	170	86	530	126	1,700	166	5,300	206	17,000	246	53,000		
7	54.5	47	175	87	545	127	1,750	167	5,450	207	17,500	247	54,500		
8	56.0	48	180	88	560	128	1,800	168	5,600	208	18,000	248	56,000		
9	58.0	49	185	89	580	129	1,850	169	5,800	209	18,500	249	58,000		
10	60.0	50	190	90	600	130	1,900	170	6,000	210	19,000	250	60,000		
11	61.5	51	195	91	615	131	1,950	171	6,150	211	19,500	251	61,500		
12	63.0	52	200	92	630	132	2,000	172	6,300	212	20,000	252	63,000		
13	65.0	53	206	93	650	133	2,060	173	6,500	213	20,600	253	65,000		
14	67.0	54	212	94	670	134	2,120	174	6,700	214	21,200	254	67,000		
15	69.0	55	218	95	690	135	2,180	175	6,900	215	21,800	255	69,000		
16	71.0	56	224	96	710	136	2,240	176	7,100	216	22,400	256	71,000		
17	73.0	57	230	97	730	137	2,300	177	7,300	217	23,000	257	73,000		
18	75.0	58	236	98	750	138	2,360	178	7,500	218	23,600	258	75,000		
19	77.5	59	243	99	775	139	2,430	179	7,750	219	24,300	259	77,500		
20	80.0	60	250	100	800	140	2,500	180	8,000	220	25,000	260	80,000		
21	82.5	61	257	101	825	141	2,575	181	8,250	221	25,750	261	82,500		
22	85.0	62	265	102	850	142	2,650	182	8,500	222	26,500	262	85,000		
23	87.5	63	272	103	875	143	2,725	183	8,750	223	27,250	263	87,500		
24	90.0	64	280	104	900	144	2,800	184	9,000	224	28,000	264	90,000		
25	92.5	65	290	105	925	145	2,900	185	9,250	225	29,000	265	92,500		
26	95.0	66	300	106	950	146	3,000	186	9,500	226	30,000	266	95,000		
27	97.5	67	307	107	975	147	3,075	187	9,750	227	30,750	267	97,500		
28	100	68	315	108	1,000	148	3,150	188	10,000	228	31,500	268	100,000		
29	103	69	325	109	1,030	149	3,250	189	10,300	229	32,500	269	103,000		
30	106	70	335	110	1,060	150	3,350	190	10,600	230	33,500	270	106,000		
31	109	71	345	111	1,090	151	3,450	191	10,900	231	34,500	271	109,000		
32	112	72	355	112	1,120	152	3,550	192	11,200	232	35,500	272	112,000		
33	115	73	365	113	1,150	153	3,650	193	11,500	233	36,500	273	115,000		
34	118	74	375	114	1,180	154	3,750	194	11,800	234	37,500	274	118,000		
35	121	75	387	115	1,215	155	3,875	195	12,150	235	38,750	275	121,000		
36	125	76	400	116	1,250	156	4,000	196	12,500	236	40,000	276	125,000		
37	128	77	412	117	1,285	157	4,125	197	12,850	237	41,250	277	128,000		
38	132	78	425	118	1,320	158	4,250	198	13,200	238	42,500	278	132,000		
39	136	79	437	119	1,360	159	4,375	199	13,600	239	43,750	279	136,000		

SEARCHING CLUE

Please refer to the following guidelines in general to reach the tyres you are looking for. For more details, separate guidelines are available in each category.

TT	Tube Type	WLT	Raised White Letter	XL	Extra Load
TL	Tubeless	BLT	Raised Black Letter	LI	Load Index
MFS	Maximum Flange Shield	OWL	Outlined White Letter	SS	Speed Symbol
E-No.	E Number	WSL	White Slim Line	PR	Ply Rating
RF	Reinforced	BLK	Black Sidewall		

NOTICE: All the information in this booklet is subject to change with or without notice.



SP RV-MAJOR TG3



STEEL BELTED RADIAL

Rib-like block pattern with multi-sipes provides excellent steering stability and low noise for comfort on road. Traction is also outstanding off road.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
10R15	6	109	N		OWL	TL		○	777	264	7.00	7.00 - 9.00	12.5
31X10.50R15	6	109	N		OWL	TT		○	777	276	8.50	7.00 - 9.00	12.7
31X10.50R15	6	109	R		OWL	TT		○	777	263	8.50	7.00 - 9.00	12.7

GRANDTREK TG4



STEEL BELTED RADIAL

Achieves superior forward drive and handling stability while demonstrating low mud-clogging (in the grooves), Great traction off the road.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
255/70R15		108	Q		BLT	TL		○	734	255	7.50	6.50 - 8.50	9.7

GRANDTREK TG5



STEEL BELTED RADIAL

Achieves high dry & wet grip performance and superior handling stability on the road and quiet and pleasant riding comfort.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
10R15		109	S		WLT	TL			774	274	8.00	7.00 - 9.00	9.1
P255/70R16		109	T		WLT	TL		○	763	264	7.50	6.50 - 8.50	9.0
LT245/75R16		120/116	S		WLT	TL		○	773	236	7.00	6.50 - 7.50	12.2



TG20

STEEL BELTED RADIAL

This multi-purpose tyre with numerous tread sipes shows excellent performance on paved road as well as snow & gravel.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
205/70R15		95	Q		BLK	TL	○	667	207	6.00	5.00 - 7.00	8.6
205/70R15		95	S		BLK	TL	○	669	209	6.00	5.00 - 7.00	8.6
P215/75R15		100	S		BLK	TL	○	711	208	6.00	5.50 - 7.00	9.7
235/75R15		105	S		BLK	TL	○	734	235	6.50	6.00 - 8.00	10.3
195/80R15		94	S		BLK	TL	○	688	203	5.50	5.00 - 6.50	8.7
205/80R16		104	S	○	BLK	TL	○	739	204	5.50	5.00 - 7.00	9.2
215/80R16		107	S	○	BLK	TL	○	750	220	6.00	5.50 - 7.00	10.2
215/80R16		103	S		BLK	TL	○	750	220	6.00	5.50 - 7.00	10.2
215/R15		100	S		BLK	TL	○	726	218	6.00	5.50 - 7.00	9.7
205/R16C	8	110/108	N		BLK	TL	○	728	213	5.50	5.50 - 6.50	9.2
205/R16		104	S	○	BLK	TL	○	738	210	5.50	5.00 - 7.00	9.2

TG21

STEEL BELTED RADIAL

This multi-purpose tyre shows outstanding durability on gravel, sand and dirt. The side-wall protector rib provides excellent cut resistance.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
7.50R16	6	109/107	R		BLT	TT	○	809	213	6.00	5.50 - 7.00	11.5
7.50R16C		112/110	R		BLT	TT		802	205	6.00	5.50 - 6.00	10.7
7.50R16	8	114/112	R		BLT	TT	○	809	216	6.00	5.50 - 7.00	10.6
7.50R16		114	S		BLT	TT	○	798	209	5.50	5.50 - 7.00	10.7



GRANDTREK TG26

STEEL BELTED RADIAL

Advanced block pattern provides excellent traction & braking performance on road and on muddy roads.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
205R16		104	R		BLK	TL	○	743	206	5.50	5.00 - 7.00	10.7

GRANDTREK TG27

STEEL BELTED RADIAL

This tyre shows excellent steering stability on road.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
225/70R15		100	S		BLK	TL	○	699	218	6.50	6.00 - 7.50	9.2

GRANDTREK TG28

STEEL BELTED RADIAL

The aggressive pattern provides remarkable high speed stability, durability, and all-round performance.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
265/70R15		110	S		BLT	TL	○	754	256	8.00	7.00 - 9.00	9.7
265/70R16		112	S		OWL	TL	○	778	269	8.00	7.00 - 9.00	9.7
265/75R15		112	S		BLK	TL	○	775	263	7.00	7.00 - 9.00	10.2



GRANDTREK TG28 M2



STEEL BELTED RADIAL

This tyre is M+S pattern in "T" range.
The sidewall protector rib ensures good durability off road in addition to on road performance.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
275/70R16		114	T		BLT	TL	○	785	278	8.00	7.00 - 9.00	10.2

GRANDTREK TG29



STEEL BELTED RADIAL

The combination of four wide straight grooves and wavy lateral grooves provides excellent driving stability and low noise.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
245/70R16		107	S		BLK	TL	○	751	242	7.00	6.50 - 8.00	10.0
195/80R15		94	S		BLK	TL		692	196	5.50	5.00 - 6.50	8.6

GRANDTREK TG30



STEEL BELTED RADIAL

Pattern with 4 rows of blocks provides excellent performance on and off road.
Good riding comfort.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
235/70R15		103	S		BLT	TL		711	242	7.00	6.00 - 8.00	10.0
215/80R15		100	S		BLT	TL		725	215	6.00	5.50 - 7.00	9.7
215R15C	8	113/111	R		BLT	TL	○	724	212	6.00	5.50 - 7.00	9.7
205R16C		106/104	N		BLT	TT	○	732	206	5.50	5.50 - 6.50	9.2
205R16C		110/108	R		BLT	TL	○	733	202	5.50	5.50 - 6.50	9.2



GRANDTREK TG32

STEEL BELTED RADIAL

Better handling and riding comfort, with lower running noise.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
215/70R16		99	S		BLK	TL	○	709	210	6.50	5.50 - 7.00	7.7
185/80R17		99	M	○	BLK	TL	○	729	186	5.50	4.50 - 6.00	7.7

GRANDTREK TG35

STEEL BELTED RADIAL

Genuine on and off road tyre which provides outstanding all-round performance with its traditional tread pattern.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
265/70R15		110	S		BLT	TL	○	755	253	8.00	7.00 - 9.00	9.7
P245/70R16		106	S		BLK	TL		753	245	7.00	6.50 - 8.00	9.0
P245/70R16		106	T		BLK	TL	○	753	245	7.00	6.50 - 8.00	9.0
265/70R16		112	H		BLT	TL	○	774	264	8.00	7.00 - 9.00	10.2
* 265/70R16		112	S		BLK	TL & TT	○	774	264	7.00	7.00 - 9.00	10.2
** 265/70R16		112	S		BLT	TL	○	778	267	8.00	7.00 - 9.00	9.2
* 265/70R16C		113/111	S		BLK	TT	○	774	265	7.00	7.00 - 8.50	10.2
** 275/70R16		114	H		OWL	TL	○	785	278	8.00	7.00 - 9.00	9.2

*=TG35M2

**=TG35M3

GRANDTREK TG36

STEEL BELTED RADIAL

Exclusively developed for users who enjoy on and off road driving with smaller SUVs.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
205/70R15		95	S		BLK	TL	○	674	196	6.00	5.00 - 7.00	8.3



GRANDTREK TG40

STEEL BELTED RADIAL

An on and off road tyre developed exclusively for smaller SUVs.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
235/75R15		105	S		BLK	TL	○	729	229	6.50	6.00 - 8.00	9.2
* 215/80R16		107	S	○	BLK	TL	○	747	207	6.00	5.50 - 7.00	10.2
* 235/80R16		109	S		BLK	TL	○	782	235	6.50	6.00 - 8.00	9.2

*=TG40 M2

SP ROAD GRIPPER (SP RG F)

STEEL BELTED RADIAL

The combination of large center blocks with multiple traction edges and sturdy shoulderblocks provides outstanding traction and braking on gravel and in mud.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
* 245/75R17		112	H		BLK	TL	○	801	247	7.00	6.50 - 8.00	11.7
* LT235/85R16		108/104	S		BLK	TL	○	810	233	6.00	6.00 - 7.50	12.7
* LT235/85R16		114/111	Q		BLK	TL	○	812	238	6.00	6.00 - 7.50	12.7
205R16C		106/104	N		BLK	TL	○	744	210	5.50	5.50 - 6.50	11.7
7.50R16	8	112/110	P		BLK	TL		809	209	6.00	5.50 - 6.00	12.7
7.50R16	8	114/112	P		BLK	TL		809	209	6.00	5.50 - 6.00	12.7

*=SP ROAD GRIPPER S

SP TGR

STEEL BELTED RADIAL

Advanced block pattern provides excellent traction and good braking performance on muddy roads as well as on and off road conditions.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
205R16C	8	110/108	N		BLK	TL	○	744	211	5.50	5.50 - 6.50	11.2
205R16C	6				BLK	TL	○	744	208	5.50	5.50 - 6.50	11.7
205R16		104	Q	○	BLK	TL	○	743	210	5.50	5.00 - 7.00	11.2



GRANDTREK ST20



STEEL BELTED RADIAL

Heavily siped pattern provides comfort and smooth riding as well as outstanding performance for highway use.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
235/60R16		100	H		BLK	TL	○	691	231	7.00	6.50 - 8.50	7.8
215/60R17		96	H		BLK	TL	○	692	220	6.50	6.50 - 7.00	8.2
225/60R17		99	H		BLK	TL	○	706	233	7.00	6.00 - 8.00	8.1
P225/60R17		98	H		BLK	TL	○	707	233	6.50	6.00 - 8.00	8.1
215/65R16		98	S		BLK	TL	○	690	216	6.50	6.00 - 7.50	8.2
215/65R16		98	H		BLK	TL	○	690	216	6.50	6.00 - 7.50	8.2
215/65R16		98	T		BLK	TL	○	689	222	6.50	6.00 - 7.50	8.1
225/65R18		103	H		BLK	TL	○	753	240	6.50	6.00 - 8.00	8.4
215/70R16		99	H		BLK	TL	○	705	225	6.50	5.50 - 7.00	7.8
215/70R16		100	H		BLK	TL	○	707	217	6.50	5.50 - 7.00	7.8
215/70R16		99	S		BLK	TL	○	705	225	7.00	5.50 - 7.00	7.8

GRANDTREK ST30



STEEL BELTED RADIAL

Asymmetry pattern provides long life and riding comfort.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
235/55R18		100	H		BLK	TL	○	716	240	7.50	6.50 - 8.50	7.9
245/55R19		103	S		BLK	TL	○	757	245	7.50	7.00 - 8.00	7.8
225/60R18		100	H		BLK	TL	○	729	226	6.50	6.00 - 8.00	8.0
225/65R17		102	H		BLK	TL	○	723	224	6.50	6.00 - 8.00	7.9
225/65R17		102	T		BLK	TL	○	725	226	6.50	6.00 - 8.00	8.0
245/65R17		107	S		BLK	TL	○	750	253	7.00	7.00 - 8.50	8.0

GRANDTREK TG31



STEEL BELTED RADIAL

Specialised tyre to provide good grip on sand.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
LT235/85R16		114/111	R		BLK	TL		806	234	6.00	6.00 - 7.50	8.7
245/85R16		114	S		BLK	TT		820	246	7.00	6.50 - 8.00	8.7
235/95R15C		116	R		BLK	TT	○	824	226	6.50	6.00 - 6.50	8.7
225/95R16C	8	118/116	R		BLK	TT	○	825	219	6.00	5.50 - 7.00	8.7



SGS

STEEL BELTED RADIAL

Block type tread pattern features superior traction on rough roads and flotation on sand ensuring excellent running performance under rough as well as normal road conditions.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
7.50R16	8	112/107	R		BLK	TT		815	215	6.00	5.50 - 6.00	9.7

GRANDTREK TOURING A/S

STEEL BELTED RADIAL

A real all season tyre with good riding comfort for SUVs.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
P235/55R19		101	V		BLK	TL		744	240	7.50	6.50 - 8.50	8.0
235/60R18		103	V		BLK	TL		736	246	7.50	6.50 - 8.50	8.0
P235/60R18		102	V		BLK	TL		738	244	7.00	6.50 - 8.50	8.0

S5

BIAS PLY

Wide rounded tread provides excellent flotation on sand with straight ribs for stability.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
9.00-15		112	Q		BLK	TT	○	838	258	6.00	6.00	8.5
255/90D16		115	P		BLK	TT	○	862	250	6.00	6.00	8.5
255/90D16		119	P		BLK	TT	○	862	250	6.00	6.00	8.5

 **DUNLOP**

LIGHT TRUCK TYRES





LIGHT TRUCK TYRES

SP175



STEEL BELTED RADIAL

Strong and durable to fit a wide range of car-types.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
195/70R15C	8	104/102	R		BLK	TL		654	200	6.00	5.00 - 6.00	9.6
205/70R15C	8	106/104	R		BLK	TL		668	210	6.00	5.50 - 6.50	10.1
215/70R15C	8	109/107	R		BLK	TL		681	221	6.50	5.50 - 7.00	10.6
155R12	8				BLK	TL		555	153	4.50	4.00 - 5.00	7.3
155R12C	8	88/86	R		BLK	TL	○	555	155	4.50	4.00 - 5.00	7.3
155R13	8				BLK	TL		581	156	4.50	4.00 - 5.00	7.2
165R13	8				BLK	TL		599	167	4.50	4.00 - 5.00	7.9
165R13C	8	94/92	N		BLK	TL	○	598	167	4.50	4.00 - 5.00	7.9
175R13	8				BLK	TL		611	176	5.00	4.50 - 5.50	8.2
165R14C	6	93/91	R		BLK	TL	○	623	167	4.50	4.00 - 5.00	8.0
175R14	8				BLK	TL		638	174	5.00	4.50 - 5.50	8.2
185R14C	6	99/97	R		BLK	TL		651	187	5.50	5.00 - 6.00	8.6
185R14C	8	102/100	R		BLK	TL	○	652	189	5.50	5.00 - 6.00	8.6
195R14C	6	102/100	R		BLK	TL		669	197	5.50	5.00 - 6.00	9.2
195R14C	8	106/104	R		BLK	TL	○	671	196	5.50	5.00 - 6.00	9.0
195R15	8				BLK	TL		689	194	5.50	5.00 - 6.00	9.1
* 195R15C	8	106/104	R		BLK	TL	○	690	190	5.50	5.00 - 6.00	9.0

* -SP175M

SP LT5



STEEL BELTED RADIAL

Features outstanding wear resistance and high speed stability.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
215/65R16C		106/104	S		BLK	TL	○	688	209	6.00	6.00 - 7.00	9.7
195/70R15C	8	104/102	R		BLK	TL	○	656	195	6.00	5.00 - 6.00	9.2
195/75R16C		107/105	N		BLK	TL	○	707	189	5.50	5.00 - 6.00	10.2
LT215/85R16	10	115/112	L		BLK	TL	○	775	210	6.00	5.50 - 7.00	10.7
155R12C	6				BLK	TL	○	557	155	4.50	4.00 - 5.00	7.4
155R12C	8				BLK	TL	○	558	156	4.50	4.00 - 5.00	7.4
155R12	8				BLK	TL		557	164	4.50	4.00 - 5.00	7.4
165R13C	8	94/92	Q		BLK	TL	○	601	167	4.50	4.00 - 5.00	8.7
175R13C	8	97/95	P		BLK	TL	○	613	181	5.00	4.50 - 5.50	8.9
185R14C	8	102/100	P		BLK	TL	○	653	182	5.50	5.00 - 6.00	9.3
195R14C		106/104	P		WLT	TL		669	200	5.50	5.00 - 6.00	9.7
195R14C	8	106/104	N		BLK	TL	○	672	194	5.50	5.00 - 6.00	9.7
195R14C	8	106/104	R		BLK	TL	○	669	191	5.50	5.00 - 6.00	9.7
195R15C	8	106/104	S		BLK	TL		689	198	5.50	5.00 - 6.00	9.7
195R15C	8	106/104	R		BLK	TL	○	691	193	5.50	5.00 - 6.00	9.7



LIGHT TRUCK TYRES

SP VAN01



STEEL BELTED RADIAL

The SP VAN01 offers superb durability, in addition to enhanced wear life.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
195/60R16C		99/97	H									
195/65R16C		104/102	T									
205/65R16C		107/105	T									
215/65R16C		109/107	T									
225/65R16C		112/110	R									
235/65R16C		115/113	R									
195/70R15C		104/102	R									
205/70R15C		106/104	R									
225/70R15C		112/110	R									
185/75R16C		104/102	R									
195/75R16C		107/105	R									
205/75R16C		113/111	R									
215/75R16C		116/114	R									
155R12C		88/86	P									
155R13C		90/89	P									
185R14C		102/100	R									
195R14C		106/104	R									

Under Development

SP LT30



STEEL BELTED RADIAL

Traditional light truck radial tyre for vans and small pick-ups. Offers long life and riding comfort.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
195/70R15C	8	104/102	S		BLK	TL	○	654	192	6.00	5.00 - 6.00	9.2
* 215/70R16C		108/106	S		BLK	TL	○	709	222	7.00	5.50 - 7.00	9.3
* 165R14C	6	93/91	S		BLK	TL	○	623	167	4.50	4.00 - 5.00	8.7
* 165R14C	8	97/95	S		BLK	TL	○	622	167	4.50	4.00 - 5.00	8.7
185R14C	8	102/100	R		BLK	TL	○	652	189	5.50	5.00 - 6.00	8.6
195R14C	8	106/104	R		BLK	TL	○	671	196	5.50	5.00 - 6.00	9.0

* = SPLT30A



LIGHT TRUCK TYRES

SP LT33

STEEL BELTED RADIAL

For light trucks and mini buses.

Wide shoulder rib provides smooth running at high speed and casing durability.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
205/60R17.5		111/109	L		BLK	TL	○	690	201	6.00	5.25 - 6.75	9.6
195/70R15.5	12	109/107	L		BLK	TL	○	662	192	6.00	6.00	10.1
215/70R17.5		118/116	L		BLK	TL		747	214	6.00	6.00 - 6.75	10.6
* 195/75R16C		107/105	N		BLK	TL	○	696	192	5.50	5.00 - 6.00	10.0
195/85R16		114/112	L		BLK	TL	○	737	189	5.50	5.00 - 6.00	10.6
205/85R16		117/115	L		BLK	TL		755	194	6.00	5.00 - 6.50	10.6
215/85R16	12	120/118	L		BLK	TL		772	211	6.00	5.50 - 7.00	11.0
7.50R16		119/117	M		BLK	TT		810	212	6.00	5.50 - 6.00	11.0
7.50R16		121/120	M		BLK	TT		809	214	6.00	6.00 - 6.00	11.0

*=SPLT33K

SP LT36

STEEL BELTED RADIAL

OEM tyre for pick-ups.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
215/70R15C		106/104	S		BLK	TL	○	679	216	6.50	5.50 - 7.00	10.5

SP LT37

STEEL BELTED RADIAL

OEM tyre for pick-ups.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
215/65R16C		106/104	S		BLK	TL	○	687	321	6.50	5.50 - 7.00	8.4
205/70R15C	8	106/104	S		BLK	TL	○	671	209	6.00	5.50 - 6.50	8.6
215/70R15C		109	S		BLK	TL	○	682	226	6.50	5.50 - 7.00	9.1
225/70R15C	10	112/110	Q		BLK	TL	○	699	231	6.50	6.00 - 7.00	9.9
215/75R16C	8	113/111	S		BLK	TL	○	730	218	6.00	5.50 - 7.00	9.9
195R14C	8	106/104	P		BLK	TL	○	666	199	5.50	5.00 - 6.00	9.6



LIGHT TRUCK TYRES

SP MAXTRAK-GRIP (SP MTG)

STEEL BELTED RADIAL

The bold continuous block pattern provide powerful traction on both gravel, snowy roads, and driving stability on highway.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
215R15	6				BLK	TL			727	214	6.00	5.50 - 7.00	11.8

SP 183

STEEL BELTED RADIAL

5-rib pattern with streamlined shoulder provides smooth steering stability in heavily loaded conditions and long life.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
											Measuring	Approved	
7.00R16	12	116/114	L		BLK	TT		○	781	188	5.50	5.50 - 6.00	10.2



LIGHT TRUCK TYRES

SP 185

STEEL BELTED RADIAL

Steel belted radial tyres developed mainly for longer tread life, riding comfort, and excellent performance in steering.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
7.00R15	10				BLK	TT		751	191	5.50	5.50 - 6.00	10.6
7.00R15	10	111/109	M		BLK	TT	○	750	198	5.50	5.50 - 6.00	10.6
6.50R16	10				BLK	TT		751	189	5.50	4.50 - 5.50	11.0
7.00R16	8	109/108	M		BLK	TT		775	193	5.50	5.50 - 6.00	10.6

SP 770

STEEL BELTED RADIAL

All season tyre designed for light trucks. Good traction on highway for year-round use.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
6.50R16	10				BLK	TT		753	182	5.50	4.50 - 5.50	13.4
7.00R16	12				BLK	TT		782	195	5.50	5.50 - 6.00	13.9



LIGHT TRUCK TYRES

SP 160

STEEL BELTED RADIAL

General purpose tyre for highway use providing long mileage, resistance to irregular wear, and good durability.



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
7.50R16	14	122/120	L		WLT	TT	○	803	215	6.00	5.50 - 6.00	11.5
7.50R16	14	123/121	L		WLT	TT		804	215	6.00	5.50 - 6.00	11.3
8.25R16	14				WLT	TT		850	223	6.50	6.00 - 6.50	11.8
8.25R16		128/126	L		WLT	TT	○	850	223	6.50	6.00 - 6.50	11.8

ENASAVE VAN 01

STEEL BELTED RADIAL



Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
195/70R15		106	L		BLK	TL		652	202	6.00	5.00 - 6.50	9.6
195/70R15C		104/102	R		BLK	TL		652	200	6.00	5.00 - 6.00	9.6
205/70R15		104	L		BLK	TL		666	210	6.00	5.00 - 7.00	10.1
215/70R15		107	L		BLK	TL		679	223	6.50	5.50 - 7.00	10.6
215/70R15C		109/107	R		BLK	TL		679	221	6.50	5.50 - 7.00	10.6
155R12	8				BLK	TL		551	159	4.50	4.00 - 4.50	7.9
155R12C		88/86	R		BLK	TL		553	157	4.50	4.00 - 5.00	7.9
145R13	8				BLK	TL		570	145	4.00	3.50 - 4.50	7.6
155R13	8				BLK	TL		584	158	4.50	4.00 - 5.00	7.9
195R14	8				BLK	TL		669	198	5.50	5.00 - 6.00	9.6
195R14C		106/104	R		BLK	TL		669	196	5.50	5.00 - 6.00	9.6

 **DUNLOP**

TRUCK and BUS TYRES



CATEGORY		ON ROAD													
		SP120	SP122	SP161	SP261	SP320	SP350	SP350A	SP391	SP442	SP882	SP871	SP160	SP343	SP430
PATTERN												SIZE AVAILABLE FOR LIMITED DEMAND			
Application for Truck	Steer	○	○		○	○	○	○	○				○	○	○
	All position	○	○	○			○	○	○				○	○	○
	Drive									○	○	○			
	Trailer	○	○		○	○	○	○	○				○	○	
Application for Bus type	InCity														○
	Intercity		○	○											
Distance	Long	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Middle	○	○		○	○	○	○	○	○	○	○	○	○	○
	Short						○		○	○			○		○
Tubeless	8.5R17.5														
	9.5R17.5														
	10R17.5														
	225/90R17.5		○				○								○
	225/80R17.5														
	205/75R17.5														
	215/75R17.5								○						
	235/75R17.5														
	235/70R17.5														
	245/70R17.5														
	8R19.5														
	225/70R19.5														
	245/70R19.5		○												
	265/70R19.5	○													
	285/70R19.5														
	425/55R19.5														
	9R22.5													○	
	10R22.5														
	11R22.5					○		○	○			○		○	
	12R22.5							○	○						
	13R22.5														
	275/80R22.5														
	295/80R22.5		○	○		○		○	○			○			
	315/80R22.5					○		○	○	○	○		○		
	245/75R22.5														
	295/75R22.5														
	255/70R22.5														
	275/70R22.5		○											○	
	315/70R22.5														
	385/65R22.5				○	○									
	425/65R22.5														
	445/65R22.5														
	295/60R22.5														
315/60R22.5															
265/60R22.5															
385/55R22.5															
11R24.5															
12R24.5															
285/75R24.5															
Tube Type	7.50R15														
	8.25R15														
	10.00R15												○		
	7.50R16		○										○		
	8.25R16		○										○		
	7.50R18														
	8.25R20														
	9.00R20						○						○		
	10.00R20					○		○							
	11.00R20							○							
	12.00R20														
	365/80R20														
	11.00R22														
	11.00R24														
	12.00R24														
	325/95R24 (TL)														

○*=SP431

CATEGORY		ON ROAD						ON-OFF ROAD					OFF ROAD	
		SP431A	SP521	SP171	SP341	SP351	SP163	SP231A	SP580A	SP831	STE	SP571	SP581	SP710A
PATTERN				SIZE AVAILABLE FOR LIMITED DEMAND			SIZE AVAILABLE FOR LIMITED DEMAND							
Application for Truck	Steer		○					○						
	All position		○	○	○	○			○	○	○	○	○	○
	Drive	○												○
	Trailer			○			○	○						
Application for Bus type	InCity		○											
	Intercity													
Distance	Long	○	○	○				○						
	Middle	○	○	○	○	○	○	○	○	○	○	○	○	○
	Short		○		○	○	○				○	○	○	○
Tubeless	8.5R17.5													
	9.5R17.5				○									
	10R17.5													
	225/90R17.5													
	225/80R17.5		○								○			
	205/75R17.5					○								
	215/75R17.5					○								
	235/75R17.5													
	235/70R17.5													
	245/70R17.5													
	8R19.5													
	225/70R19.5													
	245/70R19.5													
	265/70R19.5											○		
	285/70R19.5											○		
	425/55R19.5												○	
	9R22.5													
	10R22.5													
	11R22.5		○											○
	12R22.5	○							○			○		
	13R22.5													
	275/80R22.5											○		
	295/80R22.5	○										○		
	315/80R22.5											○		
	245/75R22.5											○	○	
	295/75R22.5													
	255/70R22.5													
	275/70R22.5													
	315/70R22.5													
	385/65R22.5													
	425/65R22.5							○						
	445/65R22.5							○						
295/60R22.5														
315/60R22.5														
265/60R22.5														
385/55R22.5														
11R24.5														
12R24.5														
285/75R24.5														
Tube Type	7.50R15													
	8.25R15					○								
	10.00R15													
	7.50R16													
	8.25R16													
	7.50R18													
	8.25R20													
	9.00R20													
	10.00R20		○	○					○	○				
	11.00R20								○	○	○			
	12.00R20										○			
	365/80R20													
	11.00R22													
	11.00R24													
	12.00R24													
	325/95R24 (TL)													

CATEGORY		ON ROAD																
		SP120	SP122	SP261	SP320	SP350	SP350A	SP391	SP442	SP871	SP160	SP241	SP430	SP431A	SP521	SP150	SP163	SP341
PATTERN																		
Application for Truck	Steer	⊙	⊙	○	⊙	⊙	⊙	⊙			⊙		○		○			
	All position	○	○			○	○	○			○		⊙		⊙	⊙		⊙
	Drive								⊙	⊙				⊙				
	Trailer	○	○	⊙	○	○	○	○			○	⊙						⊙
Application for Bus type	InCity											○			○			
	Intercity		○															
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○	○	○	○	○			
	Middle	○	○	○	○	○	○	○	○	○	⊙	⊙	⊙	⊙	⊙	○	○	○
	Short					○		○	○		○		○		○	⊙	⊙	⊙
Tubeless	8.5R17.5																	
	9.5R17.5																	○
	10R17.5															○		
	225/90R17.5					○							○					
	225/80R17.5														○			
	205/75R17.5																	
	215/75R17.5				○			○										
	235/75R17.5				○				○									○
	235/70R17.5																	
	245/70R17.5																	
	8R19.5																	
	225/70R19.5																	
	245/70R19.5											○						
	265/70R19.5	○																
	285/70R19.5																	
	425/55R19.5											○						
	9R22.5											○						
	10R22.5																	
	11R22.5				○			○				○		○		○		
	12R22.5				○			○				○			○*			
	13R22.5																	
	275/80R22.5																	
	295/80R22.5	○			○			○	○		○							
	315/80R22.5				○			○	○	○		○			○*			
	245/75R22.5																	
	295/75R22.5																	
	255/70R22.5											○						
	275/70R22.5											○						
	315/70R22.5								○		○							
	385/65R22.5			○	○													
425/65R22.5																		
445/65R22.5																		
295/60R22.5																		
315/60R22.5																		
265/60R22.5																		
385/55R22.5			○	○														
11R24.5																		
12R24.5																		
285/75R24.5																		
Tube Type	7.50R15																	
	8.25R15																	
	10.00R15											○						
	7.50R16											○						
	8.25R16											○						
	7.50R18											○						
	8.25R20											○						
	9.00R20					○						○						
	10.00R20				○			○				○						
	11.00R20							○				○						
	12.00R20															○		
	365/80R20																	
	11.00R22																	
	11.00R24																	
	12.00R24		○															
	325/95R24 (TL)																	

○*=SP431 SP322*=SP322★ SP322**=SP322 PRIME α STE*=STE★

CATEGORY		ON ROAD		ON-OFF ROAD										OFF ROAD				
		SP351	SP351K	SP231A	SP281	SP322	SP322*	SP322**	SP580A	SP811	SP831	STE	STE*	SP571	SP581	SP931	SP225	SP925
PATTERN																		
Application for Truck	Steer			○														
	All position	○			○	○	○	○	○	○	○	○	○	○	○			○
	Drive															○	○	○
	Trailer		○	○														
Application for Bus type	InCity																	
	Intercity																	
Distance	Long			○	○													
	Middle	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Short	○	○											○	○		○	○
Tubeless	8.5R17.5																	
	9.5R17.5																	
	10R17.5																	
	225/90R17.5																	
	225/80R17.5																	
	205/75R17.5																	
	215/75R17.5	○	○															
	235/75R17.5																	
	235/70R17.5																	
	245/70R17.5																	
	8R19.5																	
	225/70R19.5																	
	245/70R19.5																	
	265/70R19.5																	
	285/70R19.5																	
	425/55R19.5																	
	9R22.5																	
	10R22.5																	
	11R22.5										○							
	12R22.5								○		○							
	13R22.5															○		
	275/80R22.5																	
	295/80R22.5															○		
	315/80R22.5					○									○	○		
	245/75R22.5																	○
	295/75R22.5																	
	255/70R22.5																	
	275/70R22.5																	
	315/70R22.5																	
	385/65R22.5				○*													
	425/65R22.5				○*													
445/65R22.5				○*	○													
295/60R22.5																		
315/60R22.5																		
265/60R22.5																		
385/55R22.5																		
11R24.5																		
12R24.5																		
285/75R24.5																		
Tube Type	7.50R15																	
	8.25R15																	
	10.00R15																	
	7.50R16																	
	8.25R16																	
	7.50R18																	
	8.25R20																	
	9.00R20									○								
	10.00R20										○							
	11.00R20								○		○							
	12.00R20								○		○							
	365/80R20									○								
	11.00R22																	
	11.00R24																	
	12.00R24																	
325/95R24 (TL)																		

○*=SP231 SP322*=SP322★ SP322**=SP322 PRIME α STE*=STE★

GENERAL INFORMATION

(THIS CHART DOES NOT IMPLY COMPLETE INTERCHANGEABILITY)

70 SERIES 65-60-55-50-45-40-35 SERIES

Standard equipment size	Correspondence size						
	65SERIES	60SERIES	55SERIES	50SERIES	45SERIES	40SERIES	35SERIES
145/70R12	155/65R12 145/65R13	165/60R12 155/60R13 165/60R13	155/55R14				
155/70R12	155/65R13	165/60R13 175/60R13					
165/70R12	165/65R13	175/60R13 185/60R13 195/60R13	185/55R14				
175/70R12		185/60R13 195/60R13	185/55R14				
145/70R13	155/65R13 165/65R13	165/60R13 175/60R13 185/60R13	165/55R14	165/50R15			
155/70R13	165/65R13 155/65R14	175/60R13 185/60R13 195/60R13 165/60R14	185/55R14 165/55R15				
165/70R13	195/65R13 165/65R14 175/65R14	185/60R13 195/60R13 205/60R13 175/60R14 185/60R14	185/55R14 195/55R14 185/55R15	195/50R15	195/45R16		
175/70R13	195/65R13 175/65R14 185/65R14	195/60R13 205/60R13 185/60R14 195/60R14 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 215/50R15	205/45R16		
185/70R13	195/65R13 185/65R14 195/65R14	205/60R13 195/60R14 205/60R14 195/60R15	205/55R15	205/50R15 215/50R15 225/50R15 205/50R16	215/45R16		
165/70R14	175/65R14 185/65R14 165/65R15	185/60R14 195/60R14 205/60R14 175/60R15 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 215/50R15	205/45R16		
175/70R14	185/65R14 195/65R14 205/65R14 175/65R15 185/65R15	195/60R14 205/60R14 185/60R15 195/60R15 205/60R15	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16 215/50R16	215/45R16 245/45R16 205/45R17		
185/70R14	195/65R14 205/65R14 215/65R14 185/65R15 195/65R15 205/65R15	205/60R14 195/60R15 205/60R15 215/60R15 195/60R16	205/55R15 215/55R15 205/55R16 215/55R16	215/50R15 225/50R15 215/50R16 225/50R16 205/50R17	245/45R16 225/45R17	245/40R17 255/40R17	
195/70R14	205/65R14 215/65R14 195/65R15 205/65R15 195/65R16	205/60R15 215/60R15 205/60R16	205/55R16 215/55R16 225/55R16	225/50R15 225/50R16 215/50R17	245/45R16 225/45R17 235/45R17 245/45R17	245/40R17 255/40R17	
205/70R14	215/65R14 205/65R15 215/65R15 205/65R16	215/60R15 215/60R16	225/55R16 215/55R17	245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17	255/40R17	
195/70R15	205/65R15 215/65R15 195/65R16 205/65R16	215/60R15 205/60R16 215/60R16 225/60R16 205/60R17	215/55R16 225/55R16 215/55R17 225/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17 235/45R18	255/40R17 245/40R18 255/40R18	
205/70R15	215/65R15 205/65R16 215/65R16	215/60R16 225/60R16 235/60R16 215/60R17	225/55R16 225/55R17	245/50R16 235/50R17 225/50R18 235/50R18	245/45R17 245/45R18	255/40R18	
215/70R15	215/65R16 235/65R16	225/60R16 235/60R16 225/60R17	225/55R18	245/50R16 245/50R18			
225/70R15	235/65R16 225/65R17	235/60R16	235/55R18	245/50R18			
235/70R15	235/65R16 255/65R16						
255/70R15	255/65R16						
265/70R15	265/65R17	265/60R18					
205/70R16	215/65R16 235/65R16 225/65R17	225/60R16 235/60R16 225/60R17	225/55R17 225/55R18 235/55R18	235/50R18 245/50R18	245/45R19	285/35R19	
215/70R16	235/65R16 225/65R17	235/60R16 225/60R17 225/60R18	235/55R18	245/50R18		285/35R19	
225/70R16	235/65R16 255/65R16 225/65R17 235/65R17 225/65R18	235/60R18 245/60R18	255/55R18				
235/70R16	255/65R16	245/60R18	255/55R18				
245/70R16	255/65R16 265/65R17	265/60R18 245/60R19					
255/70R16	255/65R16 265/65R17 275/65R17	265/60R18 275/60R18					
265/70R16	265/65R17 275/65R17	275/60R18 285/60R18					
275/70R16	275/65R17	285/60R18					
215/70R17	225/65R17 235/65R17 225/65R18 235/65R18	235/60R18 245/60R18	255/55R18 235/55R19	245/50R20			
245/70R17	265/65R17 275/65R17	265/60R18 275/60R18 285/60R18		285/50R20			

65 SERIES 60-55-50-45-40-35 SERIES

Standard equipment size	Correspondence size					
	60SERIES	55SERIES	50SERIES	45SERIES	40SERIES	35SERIES
155/65R12	165/60R12					
145/65R13	155/60R13 165/60R13	155/55R14				
155/65R13	165/60R13 175/60R13		165/50R15			
165/65R13	175/60R13 185/60R13 195/60R13	185/55R14				
195/65R13	205/60R13					
145/65R14	165/60R14	165/55R14	165/50R15			
155/65R14	165/60R14 175/60R14	185/55R14 195/55R14 165/55R15 175/55R15				
165/65R14	175/60R14 185/60R14 195/60R14	185/55R14 195/55R14 185/55R15	195/50R15 205/50R15	195/45R16		
175/65R14	185/60R14 195/60R14 205/60R14 185/60R15	195/55R14 185/55R15 195/55R15	195/50R15 205/50R15 215/50R15	205/45R16		
185/65R14	195/60R14 205/60R14	205/55R15	205/50R15 215/50R15 225/50R15 205/50R16			
205/65R14	205/60R15 215/60R15	205/55R16	225/50R15 225/50R16		245/45R16 245/40R17	
215/65R14	215/60R15		245/45R16 235/45R17		255/40R17	
145/65R15	155/60R15 165/60R15	165/55R15 175/55R15	165/50R15 195/50R15 165/50R16			
165/65R15	175/60R15 185/60R15	185/55R15 195/55R15 185/55R16	195/50R15 205/50R15 215/50R15 195/50R16 205/50R16	205/45R16 215/45R16		
175/65R15	185/60R15 195/60R15 205/60R15 175/60R16 185/60R16	195/55R15 205/55R15 215/55R15 195/55R16	205/50R15 215/50R15 225/50R15 195/50R16 205/50R16 215/50R16	215/45R16 245/45R16 205/45R17		
185/65R15	195/60R15 205/60R15 215/60R15 185/60R16 195/60R16	205/55R15 215/55R15 205/55R16 215/55R16	215/50R15 225/50R15 215/50R16 225/50R16 205/50R17	245/45R16 225/45R17	245/40R17 255/40R17	
195/65R15	205/60R15 215/60R15 195/60R16 205/60R16 195/60R17	205/55R16 215/55R16 225/55R16	225/50R15 225/50R16 215/50R17	245/45R16 225/45R17 235/45R17 245/45R17	245/40R17 255/40R17	
205/65R15	215/60R15 205/60R16 215/60R16	225/55R16 215/55R17	245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17	255/40R17	
195/65R16	205/60R16 215/60R16 195/60R17 205/60R17	215/55R16 225/55R16 215/55R17 225/55R17	225/50R16 245/50R16 225/50R17 235/50R17	245/45R16 235/45R17 245/45R17 235/45R18	255/40R17 245/40R18 255/40R18	
205/65R16	215/60R16 205/60R17 215/60R17	225/55R16 225/55R17	245/50R16 235/50R17 225/50R18 235/50R18	245/45R17 245/45R18	255/40R18	
215/65R16	225/60R16 235/60R16 225/60R17	225/55R18	245/50R16 245/50R18			
225/65R16	235/60R16 225/60R17					
235/65R16	235/60R16 255/60R16					
255/65R16						
265/65R16						
205/65R17	215/60R17 235/60R17 225/60R18	225/55R17 225/55R18 235/55R18	235/50R18 245/50R18	245/45R19		285/35R19
215/65R17	235/60R17 225/60R18	235/55R18	245/50R18			285/35R19
225/65R17	235/60R17 255/60R17 225/60R18 235/60R18 225/60R19	255/55R18				
235/65R17	255/60R17 265/60R18					
245/65R17	265/60R17 275/60R18					
265/65R17	275/60R17 285/60R18					
275/65R17	285/60R17					
225/65R18	235/60R18 245/60R18 265/60R18	255/55R18				
235/65R18	265/60R18 275/60R18 245/60R19					

NOTE: This chart is based only on the overall diameter of the tyre.

• Load index (LI) must be equal or higher than original one when tyre replacement to another size.

example 195/60R15 88H → 195/55R16 87V Not recommended

• Tire clearance between the body and suspension varies with each vehicle, and or due to modifications and different wheel offsets. The above chart is not meant to indicate that the sizes listed above can actually be mounted on vehicles.

CATEGORY		ON ROAD																
		SP120	SP122	SP161	SP261	SP320	SP350	SP350A	SP361A	SP391	SP442	SP882	SP871	SP160	SP171	SP188	SP430	SP431A
PATTERN													SIZE AVAILABLE FOR LIMITED DEMAND					
Application for Truck	Steer	○	○		○	○	○	○	○	○				○			○	
	All position	○	○	○			○	○		○				○	○	○	○	
	Drive										○	○	○					○
	Trailer	○	○		○	○	○	○	○	○				○	○			
Application for Bus type	InCity																○	
	Intercity		○	○														
Distance	Long	○	○	○	○	○	○	○	○	○	○	○	○	○	○		○	○
	Middle	○	○		○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Short						○			○	○			○	○	○	○	
Tubeless	8.5R17.5																	
	9.5R17.5																	
	10R17.5																	
	225/90R17.5						○										○	
	225/80R17.5		○															
	205/75R17.5																	
	215/75R17.5					○				○	○							
	235/75R17.5					○					○							
	235/70R17.5																	
	245/70R17.5																	
	8R19.5																	
	225/70R19.5																	
	245/70R19.5																	
	265/70R19.5	○	○															
	285/70R19.5																	
	425/55R19.5																	
	9R22.5														○		○	
	10R22.5																○	
	11R22.5								○						○	○		○
	12R22.5					○			○		○		○		○			○
	13R22.5																	
	275/80R22.5																	
	295/80R22.5				○	○			○		○		○					○
	315/80R22.5				○	○			○		○	○	○		○			○
	245/75R22.5																	
	295/75R22.5																	
	255/70R22.5														○			
	275/70R22.5		○												○			
	315/70R22.5										○			○				
	385/65R22.5				○	○												
	425/65R22.5																	
	445/65R22.5																	
295/60R22.5																		
315/60R22.5																		
265/60R22.5																		
385/55R22.5					○													
11R24.5									○									
12R24.5																		
285/75R24.5																		
Tube Type	7.50R15																	
	8.25R15																	
	10.00R15													○				
	7.50R16		○														○	
	8.25R16		○														○	
	7.50R18													○				
	8.25R20													○			○	
	9.00R20							○						○			○	
	10.00R20					○								○	○			
	11.00R20													○				
	12.00R20																	
	365/80R20																	
	11.00R22																	
	11.00R24																	
	12.00R24		○															
	325/95R24 (TL)																	

SP322*=SP322★ SP322**=SP322 PRIME α STE*=STE★

ON ROAD

ON-OFF ROAD

OFF ROAD













SP502	SP521	SP150	SP163	SP341	SP351	SP351K	SP231A	SP281	SP322	SP322*	SP322**	SP580A	SP811	STE	STE*	SP571	SP581	SP931	SP225	SP925
	○						○													
○	○	○		○	○			○	○	○	○	○	○	○	○	○	○			○
			○			○	○											○	○	○
	○																			
	○						○	○												
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○										○	○	○	○	○
			○																	
		○																		
				○	○	○														
				○																
○																				
	○											○						○	○	○
												○						○	○	○
									○								○	○		○
							○	○												
							○	○	○											
				○																
	○												○					○	○	
		○											○	○			○	○		
										○						○		○	○	
											○									○











CATEGORY		ON ROAD														
		SP120	SP122	SP320	SP350A	SP361A	SP391	SP442	SP871	SP882	SP160	SP431A	SP520	SP521	SP188	SP150
PATTERN															SIZE AVAILABLE FOR LIMITED DEMAND	
Application for Truck	Steer	⊙	⊙	⊙	⊙	⊙	⊙				⊙		○	○		
	All position	○	○		○		○				○		⊙	⊙	⊙	⊙
	Drive							⊙	⊙	⊙		⊙				
	Trailer	○	○	○	○	○	○				○					
Application for Bus type	InCity													○		
	Intercity		○													
Distance	Long	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	○	○		○		
	Middle	○	○	○	○	○	○	○	○	○	⊙	⊙	⊙	⊙	⊙	○
	Short						○	○			○			○	○	⊙
Tubeless	8.5R17.5															
	9.5R17.5							○								
	10R17.5															○
	225/90R17.5		○													
	225/80R17.5															
	205/75R17.5															
	215/75R17.5			○			○	○								
	235/75R17.5			○				○								
	235/70R17.5															
	245/70R17.5															
	8R19.5															
	225/70R19.5															
	245/70R19.5										○					
	265/70R19.5	○														
	285/70R19.5															
	425/55R19.5															
	9R22.5										○					
	10R22.5															
	11R22.5			○	○		○		○	○	○	○	○	○		
	12R22.5			○	○						○	○				
	13R22.5															
	275/80R22.5		○	○			○		○	○	○					
	295/80R22.5		○	○	○		○		○	○		○				
	315/80R22.5			○	○		○	○			○	○				
	245/75R22.5															
	295/75R22.5															
	255/70R22.5										○					
	275/70R22.5		○								○					
	315/70R22.5															
	385/65R22.5			○												
	425/65R22.5															
	445/65R22.5															
295/60R22.5																
315/60R22.5																
265/60R22.5																
385/55R22.5																
11R24.5					○							○				
12R24.5																
285/75R24.5																
Tube Type	7.50R15															
	8.25R15															
	10.00R15										○					
	7.50R16										○				○	
	8.25R16		○								○					
	7.50R18										○					
	8.25R20										○					
	9.00R20										○					
	10.00R20				○	○					○	○		○		
	11.00R20					○					○					
	12.00R20															○
	365/80R20															
	11.00R22					○										
	11.00R24															
	12.00R24															
	325/95R24 (TL)															

TRUCK and BUS TYRES

STE*=STE★

CATEGORY		ON ROAD				ON-OFF ROAD						OFF ROAD				
		SP163	SP176	SP341	SP351	SP231A	SP580A	SP811	SP831	STE	STE*	SP571	SP581	SP931	SP225	SP925
PATTERN											SIZE AVAILABLE FOR LIMITED DEMAND					
Application for Truck	Steer					○										
	All position		○	○	○		○	○	○	○	○	○	○			○
	Drive													○	○	○
	Trailer	○				○										
Application for Bus type	InCity		○													
	Intercity															
Distance	Long					○										
	Middle	○		○	○	○	○	○	○	○	○	○	○	○	○	○
	Short	○	○	○	○							○	○		○	○
Tubeless	8.5R17.5															
	9.5R17.5			○												
	10R17.5															
	225/90R17.5															
	225/80R17.5															
	205/75R17.5															
	215/75R17.5				○											
	235/75R17.5			○												
	235/70R17.5															
	245/70R17.5															
	8R19.5															
	225/70R19.5															
	245/70R19.5															
	265/70R19.5															
	285/70R19.5															
	425/55R19.5															
	9R22.5															
	10R22.5															
	11R22.5						○		○					○		
	12R22.5						○		○			○		○		
	13R22.5													○		○
	275/80R22.5											○				○
	295/80R22.5		○									○	○			○
	315/80R22.5											○	○			○
	245/75R22.5															
	295/75R22.5															
	255/70R22.5															
	275/70R22.5															
	315/70R22.5															
	385/65R22.5						○									
	425/65R22.5						○									
	445/65R22.5						○									
295/60R22.5																
315/60R22.5																
265/60R22.5																
385/55R22.5																
11R24.5																
12R24.5																
Tube Type	285/75R24.5															
	7.50R15															
	8.25R15	○														
	10.00R15															
	7.50R16															
	8.25R16															
	7.50R18															
	8.25R20															
	9.00R20								○							
	10.00R20						○		○							
	11.00R20								○	○						
	12.00R20								○	○		○				
	365/80R20															
	11.00R22								○							
	11.00R24															
12.00R24										○			○			
325/95R24 (TL)																

CATEGORY		ON ROAD									
		SP120	SP320	SP350	SP350A	SP442	SP871	SP160	SP343	SP430	SP431A
PATTERN											
Application for Truck	Steer	○	○	○	○			○	○	○	
	All position	○		○	○			○	○	○	
	Drive					○	○				○
	Trailer	○	○	○	○			○	○		
Application for Bus type	InCity									○	
	Intercity										
Distance	Long	○	○	○	○	○	○	○	○	○	○
	Middle	○	○	○	○	○	○	○	○	○	○
	Short			○		○		○		○	
Tubeless	8.5R17.5										
	9.5R17.5					○					
	10R17.5										
	225/90R17.5			○						○	
	225/80R17.5										
	205/75R17.5										
	215/75R17.5										
	235/75R17.5					○					
	235/70R17.5										
	245/70R17.5										
	8R19.5										
	225/70R19.5										
	245/70R19.5							○			
	265/70R19.5	○									
	285/70R19.5										
	425/55R19.5										
	9R22.5										
	10R22.5										
	11R22.5		○		○		○	○	○	○	○
	12R22.5										
	13R22.5										
	275/80R22.5							○			
	295/80R22.5	○	○		○						
	315/80R22.5							○			
	245/75R22.5										
	295/75R22.5										
	255/70R22.5							○			
	275/70R22.5			○						○	
	315/70R22.5										
	385/65R22.5										
425/65R22.5											
445/65R22.5											
295/60R22.5											
315/60R22.5											
265/60R22.5	○										
385/55R22.5											
11R24.5											
12R24.5											
285/75R24.5											
Tube Type	7.50R15										
	8.25R15										
	10.00R15										
	7.50R16							○			
	8.25R16							○			
	7.50R18							○			
	8.25R20							○			
	9.00R20			○							
	10.00R20			○							
	11.00R20										
	12.00R20										
	365/80R20										
	11.00R22										
	11.00R24										
	12.00R24										
	325/95R24 (TL)										

CATEGORY		ON ROAD				ON-OFF ROAD				OFF ROAD	
		SP502	SP521	SP163	SP341	SP231A	SP580A	SP831	SP581	SP931	SP710A
PATTERN											
Application for Truck	Steer		○			○					
	All position	◎	◎		◎		◎	◎	◎		○
	Drive									◎	◎
	Trailer			◎		◎					
Application for Bus type	InCity		○								
	Intercity										
Distance	Long		○			○					
	Middle	◎	◎	○	○	◎	◎	◎	○	◎	○
	Short	○	○	◎	◎				◎		◎
Tubeless	8.5R17.5										
	9.5R17.5				○						
	10R17.5										
	225/90R17.5										
	225/80R17.5		○								
	205/75R17.5										
	215/75R17.5										
	235/75R17.5				○						
	235/70R17.5										
	245/70R17.5										
	8R19.5										
	225/70R19.5										
	245/70R19.5										
	265/70R19.5	○									
	285/70R19.5										
	425/55R19.5										
	9R22.5										
	10R22.5										
	11R22.5		○				○			○	○
	12R22.5										
	13R22.5										
	275/80R22.5										
	295/80R22.5								○		
	315/80R22.5										
	245/75R22.5										
	295/75R22.5										
	255/70R22.5										
	275/70R22.5								○		
	315/70R22.5										
	385/65R22.5					○					
	425/65R22.5										
	445/65R22.5										
295/60R22.5											
315/60R22.5											
265/60R22.5											
385/55R22.5											
11R24.5											
12R24.5											
285/75R24.5											
Tube Type	7.50R15										
	8.25R15			○							
	10.00R15										
	7.50R16										
	8.25R16										
	7.50R18										
	8.25R20										
	9.00R20										
	10.00R20								○		
	11.00R20										
	12.00R20										
	365/80R20										
	11.00R22										
	11.00R24										
	12.00R24										
	325/95R24 (TL)										



TRUCK AND BUS TYRES

SP 120

ALL STEEL RADIAL

High mileage tubeless radial with wet brake performance.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
265/60R22.5		143/140J	TL	○	888	269	8.25	7.50 - 8.25	10.6
265/70R19.5	18	143/141J	TL	○	868	253	7.50	6.75 - 8.25	13.0
295/80R22.5		152/148M	TL	○	1045	302	9.00	8.25 - 9.00	13.4

SP 122

ALL STEEL RADIAL

5-rib pattern wears evenly for general usage.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
7.50R16		122/118L	TT	○	806	217	6.00	5.50 - 7.00	12.5
8.25R16	16	128/124L	TT	○	854	239	6.50	5.50 - 7.50	12.0
12.00R24		156/153K	TT	○	1213	317	8.50	7.50 - 9.00	14.4
11R22.5	16	148/145L	TL	○	1054	283	8.25	7.50 - 8.25	13.9/14.4
* 225/90R17.5		127/125L							
245/70R19.5	14	136/134J	TL	○	838	249	7.50	6.75 - 7.50	13.4
265/70R19.5		140/138J	TL	○	866	257	7.50	6.75 - 8.25	13.9
275/70R22.5	16	148/145J	TL	○	960	276	8.25	7.50 - 8.25	13.9
275/80R22.5	16	149/146L	TL	○	1016	284	8.25	7.50 - 8.25	14.0
295/80R22.5	16	152/148M	TL	○	1049	306	9.00	8.25 - 9.00	14.5

* =Under Development



TRUCK AND BUS TYRES

SP161

ALL STEEL RADIAL

Rib pattern for intercity bus use.

Gives long mileage and durability for highway use.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
295/80R22.5		152/148M	TL	○	1050	303	9.00	8.25 - 9.00	14.6
315/80R22.5	18	154/150M	TL	○	1079	311	9.00	9.00 - 9.75	16.1

SP 261

ALL STEEL RADIAL

Widebase tyre for highway use.

5-rib pattern for mainly trailer position use.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
385/65R22.5		160K(158L)	TL	○	1074	378	11.75	11.75	16.5

SP 320

ALL STEEL RADIAL

A 5-rib tyre for long distance use providing long mileage, resistance to irregular wear.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
* 10.00R20									
* 11R22.5									
* 12R22.5									
* 385/55R22.5									
* 385/65R22.5									
* 215/75R17.5									
* 235/75R17.5									
* 275/80R22.5									
* 295/80R22.5									
* 315/80R22.5									

* =Under Development



TRUCK AND BUS TYRES

SP 350

ALL STEEL RADIAL

Utilizes a premium rib pattern for superior resistance to uneven wear.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
9.00R20	14	141/138L	TT		1019	260	7.00	6.50 - 7.50	13.0/13.4
10.00R20	14	146/143L	TT		1052	279	7.50	7.00 - 8.00	13.4/13.9
275/70R22.5		148/145L	TL		960	273	8.25	7.50 - 8.25	13.0/13.4
225/90R17.5		128/126L	TL	○	858	230	6.75	6.00 - 6.75	12.5/13.0

SP 350A

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10.00R20	16	146/143L	TT	○	1054	280	7.50	7.00 - 8.00	15.1
11.00R20	16	150/147L	TT	○	1082	294	8.00	7.50 - 8.50	15.1
11.00R22	16	150/146K	TT	○	1136	298	8.00	7.50 - 8.50	14.9
11R22.5	16	148/145L	TL	○	1054	281	8.25	7.50 - 8.25	15.1
12R22.5	16	152/148L	TL	○	1082	300	9.00	8.25 - 9.00	15.1
295/80R22.5	16	152/148M	TL	○	1051	307	9.00	8.25 - 9.00	15.3
315/80R22.5	18		TL	○	1078	315	9.00	9.00 - 9.75	16.5

SP 361A

ALL STEEL RADIAL

A straight 5-rib pattern designed for highway service.
Gives excellent driving stability at high speed and riding comfort on highway.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11R24.5	16	149/146L	TL	○	1101	287	8.25	7.50 - 8.25	14.2



TRUCK AND BUS TYRES

SP 391

ALL STEEL RADIAL

High performance rib-pattern tyre for regional use. It reduces irregular wear for long tread life.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11R22.5	16	148/145L	TL	○	1056	278	8.25	7.50 - 8.25	15.0
12R22.5		152/148L	TL	○	1083	301	9.00	8.25 - 9.00	15.7
315/70R22.5		154/150L	TL	○	1017	318	9.50	8.00 - 10.50	16.0
215/75R17.5		126/124M	TL	○	775	209	6.00	6.00 - 6.75	13.0
275/80R22.5	16	149/146L	TL	○	1023	281	8.25	7.50 - 8.25	16.2
295/80R22.5	16	152/148M	TL	○	1055	307	9.00	8.25 - 9.00	16.5
315/80R22.5	18	154/150M	TL	○	1078	312	9.00	9.00 - 9.75	17.0

SP 442

ALL STEEL RADIAL

A premium drive-axle tyre. Provides long mileage, excellent traction on highway or wet surfaces.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
9.5R17.5		129/127M	TL	○	847	240	6.75	6.00 - 6.75	16.4
215/75R17.5		126/124M	TL	○	777	212	6.00	6.00 - 6.75	14.7
235/75R17.5		132/130M	TL	○	806	238	6.75	6.75 - 7.50	16.5
315/80R22.5	18	154/150M	TL	○	1092	313	9.00	9.00 - 9.75	24.0/22.8

SP 871

ALL STEEL RADIAL

Combination of wide and deep tread depth and advanced tread compound delivers longer mileage. Durable casing and integrity for retreadability is achieved through reduced heat build up.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11R22.5	16	148/145L	TL	○	1069	286	8.25	7.50 - 8.25	22.5
315/70R22.5		154/150L	TL		1033	318	9.50	8.00 - 10.50	22.0
275/80R22.5	16	149/146L	TL	○	1036	285	8.25	7.50 - 8.25	21.8
295/80R22.5	16	152/148M	TL	○	1065	305	9.00	8.25 - 9.00	23.4



TRUCK AND BUS TYRES

SP 882



ALL STEEL RADIAL

A drive position tyre designed for on road operations.

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11R22.5	16	146/143L	TL		1071	279	8.25	7.50 - 8.25	22.0
12R22.5		152/148L	TL	○	1096	298	9.00	8.25 - 9.00	24.2
295/80R22.5		152/148M	TL	○	1059	306	9.00	8.25 - 9.00	18.7
315/80R22.5		154/150M	TL	○	1091	309	9.00	9.00 - 9.75	21.3

SP 160



ALL STEEL RADIAL

A 5-rib tyre for highway service with excellent casing durability and resistance to irregular wear.

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10.00R15	14	137/135K	TT		918	272	7.50	7.00 - 8.00	12.5
10.00R15	18	148/145K	TT	○	918	272	7.50	7.00 - 8.00	12.5
10.00R15	18	148/145F	TT	○	918	272	7.50	7.00 - 8.00	12.5
7.50R16	14	122/120L	TT	○	803	215	6.00	5.50 - 6.00	11.5
7.50R16	14	123/121L	TT		804	215	6.00	5.50 - 6.00	11.3
7.50R18	14	127/125L	TT		879	213	6.00	6.00 - 6.50	12.0
8.25R16	14		TT		850	223	6.50	6.00 - 6.50	11.8
8.25R16		128/126L	TT	○	850	223	6.50	6.00 - 6.50	11.8
8.25R20	14	136/134L	TT	○	968	231	6.50	6.00 - 7.00	12.5
9.00R20	14	140/137L	TT	○	1016	259	7.00	6.50 - 7.50	13.0
10.00R20	16	146/143L	TT	○	1048	275	7.50	7.00 - 8.00	13.2
11.00R20	16	150/147L	TT	○	1074	289	8.00	7.50 - 8.50	13.9
9R22.5	14	136/134L	TL	○	967	225	6.75	6.00 - 6.75	12.5
10R22.5	14	144/142L	TL	○	1015	247	7.50	6.75 - 7.50	13.0
11R22.5	16	148/145L	TL	○	1049	275	8.25	7.50 - 8.25	13.4
12R22.5	16	152/147L	TL	○	1075	298	9.00	8.25 - 9.00	13.9
245/70R19.5		136/134J	TL		844	242	7.50	6.75 - 7.50	12.5
245/70R19.5		136/134M	TL	○	844	242	7.50	6.75 - 7.50	12.5
255/70R22.5		140/137M	TL	○	926	257	7.50	6.75 - 8.25	12.5
275/70R22.5	16	148/145L	TL	○	959	274	8.25	7.50 - 8.25	13.4
275/80R22.5	16	148/145M	TL	○	1017	275	8.25	7.50 - 8.25	13.4
315/80R22.5	18	154/150M	TL	○	1075	311	9.00	9.00 - 9.75	14.7



TRUCK AND BUS TYRES

SP 171

ALL STEEL RADIAL

A trailer use tyre designed for mainly on road middle distance use.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10.00R20	16	146/143K	TT		1049	281	7.50	6.50 - 8.00	14.7
10.00R20		147/143L	TT	○	1049	281	7.50	6.50 - 8.00	14.7
11R22.5		148/145L	TL	○	1052	275	8.25	7.50 - 8.25	14.7

SP 188

ALL STEEL RADIAL

An all position tread pattern designed for mainly middle distance and limited long distance use.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
7.50R16		122L							
8.25R16		128L							
8.25R20		133L							
9.00R20		140/137L	TT	○	1020	263	7.00	6.00 - 7.50	13.3
9R22.5		133/131L	TL	○	976	231	6.75	6.00 - 6.75	13.3
10R22.5		144/142L	TL	○	1026	258	7.50	6.75 - 7.50	14.2

SP 241

ALL STEEL RADIAL

A wide base tyre for trailer position use.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
425/55R19.5		160J	TL	○	979	418	13.00	13.00 - 14.00	13.0



TRUCK AND BUS TYRES

SP 343



ALL STEEL RADIAL

Deep 5-rib pattern gives long mileage and durability for highway use. Well-balanced ribs provide outstanding irregular wear resistance for all position use.

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11R22.5	16	148/145L	TL		1054	284	8.25	7.50 - 8.25	16.2

SP 430



ALL STEEL RADIAL

Sturdy 4-rib pattern with notches at outer rib provides long mileage and better wet performance for all position service. Recommended for local highway use.

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11R22.5		148/145L	TL	○	1056	282	8.25	7.50 - 8.25	15.8/16.3
275/70R22.5	16	148/145L	TL	○	965	276	8.25	7.50 - 8.25	15.4/15.8
225/90R17.5	14	128/126L	TL	○	862	230	6.75	6.00 - 6.75	14.9/15.4

SP 431A



ALL STEEL RADIAL

Extra-deep traction tyre for long tread life without sacrificing retreadability. The unique block pattern offers excellent traction and prevents block-punching under various conditions.

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10.00R20	16	146/143L	TT	○	1062	281	7.50	7.00 - 8.00	20.2
11R22.5	16	148/145L	TL		1065	283	8.25	7.50 - 8.25	20.2
12R22.5	16	152/148L	TL	○	1098	304	9.00	8.25 - 9.00	20.2
11R24.5	16	149/146L	TL	○	1118	279	8.25	7.50 - 8.25	20.2
295/80R22.5	16	152/148M	TL	○	1060	308	9.00	8.25 - 9.00	20.2
315/80R22.5	18	154/150M	TL	○	1084	311	9.00	9.00 - 9.75	20.2



TRUCK AND BUS TYRES

SP 502



ALL STEEL RADIAL

All position tyre designed for on road service.
The grooves are designed to prevent stone retention and irregular wear.

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
265/70R19.5	18	143/141J	TL	○	871	253	7.50	6.75 - 8.25	14.4

SP 520



ALL STEEL RADIAL

A radial tyre with big zigzag pattern.
It's superior in wear resistance and resistant to stone trapping.
Side cut protectors added to strengthen the sidewalls.

Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11R22.5	16		TL		1059	278	8.25	7.50 - 8.25	16.3/16.8

SP 521

ALL STEEL RADIAL

Its deeper tread depth and rigid tread pattern provide longer mileage and better wet performance for all position service.
Recommended for local highway use, especially for city bus, garbage truck and cement mixer.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10.00R20	16	146/143K	TT	○	1054	278	7.50	6.50 - 8.00	16.5/18.5
11R22.5	16	148/145J	TL	○	1055	281	8.25	7.50 - 8.25	16.5/18.5
225/80R17.5		123/122L	TL	○	811	218	6.75	6.00 - 6.75	15.5



TRUCK AND BUS TYRES

SP 150

ALL STEEL RADIAL

General purpose highway tyre providing excellent wear resistance and steering stability.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10R17.5	16	134/132L	TL	○	858	251	7.50	6.75 - 7.50	12.9
12.00R20	18	154/151K	TT	○	1120	302	8.50	8.00 - 9.00	15.6

SP 163

ALL STEEL RADIAL

All Steel radial rib-type tyre designed for low platform trailer use.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
8.25R15	18	143/141K	TT	○	846	236	6.50	6.00 - 7.00	12.3

SP 176

ALL STEEL RADIAL

An all position tyre designed for City bus.
4-rib pattern enhances durability and contact area.
The tread pattern enhances wet performance and irregular wear resistance.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
295/80R22.5	16	152/148J	TL		1057	306	9.00	8.25 - 9.00	18.0
275/80R22.5									



TRUCK AND BUS TYRES

SP 341

ALL STEEL RADIAL

4-rib pattern designed for all position use.
Demonstrates excellent wet traction performance.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
9.5R17.5		129/127M	TL	○	843	240	6.75	6.00 - 6.75	14.5
235/75R17.5		132/130M	TL	○	804	234	6.75	6.75 - 7.50	14.5

SP 351

ALL STEEL RADIAL

A premium 5-rib Sheer-axle tyre designed for highway service.
The wide and flat tread provides long tread life, reducing irregular wear for all position use.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
215/75R17.5		124/123L	TL		771	210	6.00	6.00 - 6.75	12.5
* 215/75R17.5		124/123L	TL		771	210	6.00	6.00 - 6.75	12.5

* =SP351K

SP 231A

ALL STEEL RADIAL

A wide base tyre for on road service with limited off road use.
It works well where more traction performance is required.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
385/65R22.5	18	160K	TL	○	1074	377	11.75	11.75 - 12.25	15.8
425/65R22.5	20	165K	TL	○	1125	418	13.00	13.00 - 14.00	16.1
445/65R22.5	20	168K	TL	○	1155	447	14.00	13.00 - 14.00	16.5



TRUCK AND BUS TYRES

SP 281

ALL STEEL RADIAL

An all position tyre designed for on and off road operations.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
445/65R22.5		168K	TL	○	1159	454	13.00	13.00 - 14.00	19.2

SP 322

ALL STEEL RADIAL

An all position tyre for general use in Middle East countries.

Unique 4-rib pattern and special tread compound ensure good performance in these regions.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
12.00R20		184/150K	TT			Under Development			
* 12.00R24	18	156/153K	TT	○	1215	316	8.50	8.00 - 9.00	12.9
* 12.00R24	20	160/156K	TT	○	1214	316	8.50	8.00 - 9.00	12.9
315/80R22.5		154/150M	TL	○	1078	314	9.00	9.00 - 9.75	16.6
** 325/95R24		162/160K	TT	○	1215	314	9.00	8.50 - 10.00	12.9
** 325/95R24			TL(TT)			Under Development			

* =SP 322★ ** =SP 322 PRIME α

TL(TT)=TUBELESS MAY BE USED WITH TUBE



SP 322 · **SP 322 PRIME α**



TRUCK AND BUS TYRES

SP 580A

ALL STEEL RADIAL

Utilizes a rib-lug pattern with superior uneven wear resistance.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10.00R20	16	146/143K	TT	○	1061	280	7.50	7.00 - 8.00	15.8/18.0
11.00R20	16	150/147K	TT	○	1086	294	8.00	7.50 - 8.50	15.8/18.0
11R22.5	16	148/145K	TL	○	1061	281	8.25	7.50 - 8.25	15.8/18.0
12R22.5	16	152/148K	TL	○	1086	300	9.00	8.25 - 9.00	15.8/18.0

SP 811

ALL STEEL RADIAL

Designed for use in any position, on and limited off road. Special tread compound provides outstanding cut and wear resistance.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
9.00R20	14	141/139K	TT	○	1021	264	7.00	6.50 - 7.50	14.4
12.00R20	18	154/151K	TT	○	1128	305	8.50	8.00 - 9.00	10.6/16.3



TRUCK AND BUS TYRES

SP 831

ALL STEEL RADIAL

All position tyre designed for on road service with limited off road use. The unique 5-rib tread wears evenly and the grooves are designed to prevent stone retention.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10.00R20	16	146/143K	TT	○	1053	280	7.50	7.00 - 8.00	15.6
11.00R20	16	150/147K	TT		1087	297	8.00	7.50 - 8.50	16.4
11.00R22	16	152/149K	TT	○	1137	297	8.00	7.50 - 8.50	16.4
11R22.5	16	148/144K	TL		1053	280	8.25	7.50 - 8.25	15.6
12R22.5	16	152/148L	TL		1087	292	9.00	8.25 - 9.00	16.4

SP 931

ALL STEEL RADIAL

SP931 is designed to deliver extra long tread life and enhanced traction in the toughest conditions, Such as mud, sand, and rough roads. Having extra deep groove, suitable for garbage trucks and other vehicles that require off applications.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
10.00R20	16	147/143G	TT		1074	281	7.50	7.00 - 8.00	24.8
11.00R20		150/147G	TT		1104	298	8.00	7.50 - 8.50	24.8
11R22.5	16	148/145G	TL		1072	284	8.25	7.50 - 8.25	24.8
11R22.5	16	148/145J	TL		1072	284	8.25	7.50 - 8.25	24.8
12R22.5	16	152/148J	TL	○	1102	296	9.00	8.25 - 9.00	24.8
13R22.5		154/150K	TL	○	1138	318	9.75	9.00 - 9.75	24.8



TRUCK AND BUS TYRES

STE

ALL STEEL RADIAL

An all-position tyre designed especially for Middle Eastern countries durable construction with a heat-resistant compound.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11.00R20	16	150/147K	TT		1087	282	8.00	7.50 - 8.50	15.8
12.00R20	18	154/151K	TT	○	1123	297	8.50	8.00 - 9.00	16.3
* 12.00R24		156/153K	TT	○	1214	317	8.50	7.50 - 9.00	12.4

* =STE★

SP 571

ALL STEEL RADIAL

Rib/lug pattern for mainly on and off-road condition for all position use.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
12.00R20		154/150K	TT	○	1125	308	8.50	8.00 - 9.00	15.6
12R22.5		152/148L	TL	○	1076	312	9.00	8.25 - 9.00	16.3
* 225/80R17.5									
275/80R22.5		149/146K	TL	○	1026	283	8.25	7.50 - 8.25	17.4
295/80R22.5		152/148K	TL	○	1059	307	9.00	8.25 - 9.00	18.8
315/80R22.5		156/150K	TL	○	1079	311	9.00	9.00 - 9.75	16.1
315/80R22.5		154/150M	TL	○	1076	312	9.00	9.00 - 9.75	16.1
315/80R22.5		154/151L	TL	○	1076	312	9.00	9.00 - 9.75	16.1
325/95R24		162/160K	TL(TT)	○	1222	325	9.00	8.50 - 10.00	16.7

* =Under Development

TL(TT)=TUBELESS MAY BE USED WITH TUBE



DUNLOP PATTERN DIGEST 2018

CONTENTS

GENERAL INFORMATION	3 - 6
PASSENGER CAR TYRES	9 - 42
4×4[4WD] TYRES	43 - 64
LIGHT TRUCK TYRES	65 - 71
TRUCK and BUS TYRES	72 - 98
OFF-THE-ROAD-TYRES	99 -100
INDUSTRIAL TYRES	101 -102
SAFETY INFORMATION	103 -108





TRUCK AND BUS TYRES

SP 581

ALL STEEL RADIAL

All position tread pattern enhances wet grip in both on and off road operations.

Special tread compound increases cut and chipping resistance.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
275/70R22.5	16	148/145K	TL	○	970	281	8.25	7.50 - 8.25	18.0
295/80R22.5	16	152/148K	TL	○	1059	305	9.00	8.25 - 9.00	18.6
315/80R22.5	20		TL		1085	313	9.00	9.00 - 9.75	19.1
315/80R22.5		154/150K	TL	○	1085	312	9.00	9.00 - 9.75	18.9

SP 225

ALL STEEL RADIAL

Designed for drive axle use, mainly off road.

Offers excellent traction on both dry and wet surfaces.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
12.00R24	18	156/153K	TT	○	1212	304	8,50	8.00 - 9.00	13.0/18.2



TRUCK AND BUS TYRES

SP 710A

ALL STEEL RADIAL

Special parallel lug design offers superb traction and outstanding stability for off road including wet surfaces.
Tough tread compound protects casing from stone drilling, cutting, and chipping.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
							Measuring	Approved	
11R22.5	16	148/145J	TL	○	1064	282	8.25	7.50 - 8.25	15.8/20.6

SP 925

ALL STEEL RADIAL

Designed for drive axel use , mainly off road.
Special tread compound provides long life and outstanding cut / chipping resistance.



Tyre Size	Ply Rating	Load Index & Speed Symbol	TL or TT	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width		Tread Depth (mm)
							Measuring (inch)	Approved (inch)	
* 13R22.5									
275/80R22.5		149/146K	TL	○	1029	282	8.25	7.50 - 8.30	19.4
295/80R22.5		152/148K	TL	○	1061	306	9.00	8.30 - 9.00	20.0
315/80R22.5		156/150K	TL	○	1096	315	9.00	9.00 - 9.75	24.2
325/95R24		162/160K	TT	○	1231	310	9.00	8.50 - 10.00	21.4
* 325/95R24			TL(TT)						

*=Under Development

TL(TT)=TUBELESS MAY BE USED WITH TUBE

 **DUNLOP**

OFF-THE-ROAD TYRES





OFF-THE-ROAD TYRES

EM14 (G-2)



BIAS PLY

Suitable for front-end loader and grader service on gravel, muddy and soft surfaces.

Tread pattern provides traction and self-cleaning.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
10-16.5	6				TL			769	259	8.25	8.25	19.5
12.5/ 70-16	6				TL			865	308	10.00		21.5

Use	Code Number	Type	Pattern
GRADER SERVICE	G-2	Traction	EM14

 **DUNLOP**

INDUSTRIAL TYRES



This is just a sample image.



INDUSTRIAL TYRES

POWER LIFTER



PNEUMATIC BIAS PLY

The tread is flat and wide with deep grooves. Its wide contact area provides excellent wear, cut, and chip resistance, traction, stability and comfort.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
5.00-8	8				BLK	TT		467	134	3,00	3,00 - 3,50	14,6
6.00-9	10				BLK	TT		536	160	4,00	4,00	14,7
6.50-10	10				BLK	TT		583	181	5,00	5,00	17,3
7.00-12	12				BLK	TT		671	189	5,00	5,00	18,0
3.00-15	18											
5.50-15	8				BLK	TT		672	156	4,50	4,50	18,0
7.00-15MS	12				BLK	TT		718	194	6,00	6,00	18,0
7.50-15	12				BLK	TT		780	213	6,00	6,00 - 6,50	20,2
8.25-15	12				BLK	TT		840	234	6,50	6,50	21,9
8.25-15	14				BLK	TT		840	234	6,50	6,50	21,9
28X8-15	12				BLK	TT		718	194	6,50	6,00 - 6,50	18,0
28X9-15	12				BLK	TT		715	216	7,00	7,00	18,8
7.50-16	12				BLK	TT		813	215	6,00	6,00	21,9

POWER LIFTER M



PNEUMATIC BIAS PLY

A version of Power Lifter, its wide and flat profile provides even greater stability.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
18X7-8	14				BLK	TT		467	167	4,33		13,0
21X8-9	14				BLK	TT		535	190	6,00		19,0
23X9-10	16				BLK	TT		595	225	6,50		20,4

POWER LIFTER MILD DG



RUBBER SOLID TYRE ON PNEUMATIC TYRE RIM (TRUKUSH)

A tyre utilizing the Power Lifter pattern for enhanced riding comfort as well as increased wear resistance.

Excellent for users who require a tough tyre for heavy duty jobs.

Tyre Size	Ply Rating	Load Index	Speed Symbol	XL or RF	TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
T6.00-9/4.00					BLK			540	156	4,00	4,00	16,9
T6.50-10/5.00					BLK			590	174	5,00	5,00	17,8
T7.00-12/5.00					BLK			673	188	5,00	5,00	18,6
T27X10-12												
T28X9-15/7.00					BLK			718	220	7,00		21,7
T2.50-15/7.00					BLK			730	225	7,00		26,0
T3.00-15/8.00												

NEVER use a rim which was used previously for a RUBBER SOLID TYRE for a PNEUMATIC TYRE.

SAFETY INFORMATION

for PCR / 4x4 / LTR

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation, overloading, excessive wear or other use conditions.

All tyres eventually wear out. A worn or damaged tyre can present a safety hazard, and a tyre failure can lead to an accident that may result in property damage, injuries or death.

To reduce the risk of tyre failure we advise as follows:

- 1 **CHECK** the air pressure in all your tyres frequently, including the spare, when tyres are cool. (when your vehicle has been driven less than a few kilometers or after being stopped for more than a hour) Don't reduce air pressure when tyres are hot from driving; use a tyre gauge to check the pressure and maintain it at the level recommended by vehicle manufacturer.
- 2 **NEVER** overload your tyres. The maximum load carrying capability of your tyre is moulded on the sidewall of each tyre.
- 3 **CHECK** your tyres regularly for scrapes, bulges, separations, cuts, snags or embedded foreign objects. Show the tyres to your dealer immediately if any such condition is discovered.
- 4 **NEVER** operate your vehicle in excess of lawful speeds, speeds suitable for the driving conditions or at speeds greater than recommended for the tyre you are using.
- 5 **AVOID** driving over objects that may damage the tyres through impact or cutting such as potholes, glass, metal, etc.
- 6 **NEVER** drive on bald tyres. Always remove tyres from service and replace them before they reach the remaining 1.6mm of the tyre depth. Tread wear indicators are built into the tyres to indicate when they are worn to 1.6mm. It is illegal to drive on tyres with less than 1.6mm remaining tread depth.
- 7 **DON'T** spin tyres excessively on mud, snow, ice, etc. as this can cause tyre damage, as well as axle failure.

IMPORTANT INFORMATION is moulded on the sidewall.

Among other information, the sidewall engraving contains the tyre size, load index, maximum load and maximum pressure for that particular tyre.

Always follow the instructions and recommendations of the vehicle manufacturer, as contained in the vehicle Owner's Manual.

WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TYRE/RIM ASSEMBLY IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- **ONLY** specially trained persons should mount tyres.
- **ALWAYS** match rim diameter with appropriate tyre size.
- **NEVER** mount a tyre on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- **NEVER** put a flammable substance into a tyre.
- **ALWAYS** clean and lubricate the rim and tyre beads before mounting the tyre.
- **ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- **ALWAYS** lock the wheel on the tyre mounting machine, or place it in a safety cage when inflating.
- **ALWAYS** stand clear, and **NEVER** lean on or reach over the tyre/rim assembly when inflating.
- **NEVER** inflate over 40 psi (275 kPa) to seat bead.
- **ALWAYS** adjust tyre pressure to the vehicle manufacturer's recommendations after beads are fully seated.
- **ALWAYS** put winter tyres on in a set of four, to your vehicle.

for TRUCK and BUS TYRES

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation, overloading, excessive wear or other use conditions.

All tyres eventually wear out. A worn or damaged tyre can present a safety hazard, and a tyre failure can lead to an accident that may result in property damage, injuries or death.

To reduce the risk of tyre failure we advise as follows:

- 1 **CHECK** the air pressure in all your tyres frequently, including the spare, when tyres are cool. (when your vehicle has been driven less than a few kilometers or after being stopped for more than a hour)
Don't reduce air pressure when tyres are hot from driving; use a tyre gauge to check the pressure and maintain it at the level recommended by vehicle manufacturer.
- 2 **NEVER** overload your tyres. The maximum load carrying capability of your tyre is moulded on the sidewall of each tyre.
- 3 **CHECK** your tyres regularly for scrapes, bulges, separations, cuts, snags or embedded foreign objects.
Show the tyres to your dealer immediately if any such condition is discovered.
- 4 **NEVER** operate your vehicle in excess of lawful speeds, speeds suitable for the driving conditions or at speeds greater than recommended for the tyre you are using.
- 5 **AVOID** driving over objects that may damage the tyres through impact or cutting such as potholes, glass, metal, etc.
- 6 **NEVER** drive on bald tyres. Always remove tyres from service and replace them before they reach the remaining 1.6mm of the tyre depth.
Tread wear indicators are built into the tyres to indicate when they are worn to 1.6mm.
It is illegal to drive on tyres with less than 1.6mm remaining tread depth.
- 7 **DON'T** spin tyres excessively on mud, snow, ice, etc. as this can cause tyre damage, as well as axle failure.

IMPORTANT INFORMATION is moulded on the sidewall.

Among other information, the sidewall engraving contains the tyre size, load index, maximum load and maximum pressure for that particular tyre.

Always follow the instructions and recommendations of the vehicle manufacturer, as contained in the vehicle Owner's Manual.

WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM EXPLOSION OF TYRE/RIM ASSEMBLY IF PROPER MOUNTING INSTRUCTIONS ARE NOT FOLLOWED.

- **ONLY** specially trained persons should mount tyres.
- **ALWAYS** match rim diameter with appropriate tyre size.
- **NEVER** mount a tyre on a cracked, bent, rusted or otherwise damaged rim or a rim which has been repaired.
- **ALWAYS** make sure inside of tyre is dry before mounting. Moisture in tyre can damage casing.
- **NEVER** put a flammable substance into a tyre.
- **ALWAYS** clean and lubricate the rim and tyre beads before mounting the tyre.
- **ALWAYS** use an extension air hose with gauge and clip-on air chuck.
- **ALWAYS** inflate with dry air from compressor having a properly-working moisture filter.
- **ALWAYS** stand clear, and **NEVER** lean on or reach over the tyre/rim assembly when inflating.
- **NEVER** inflate over 40 psi (275 kPa) to seat bead.
- **ALWAYS** adjust tyre pressure to the vehicle manufacturer's recommendations after beads are fully seated.

SAFETY INFORMATION FOR INDUSTRIAL TYRES

PROPER TYRE USAGE

CHOSING THE CORRECT TYRE FOR THE JOB

In the selection of a tyre for a particular application, it is important that the vehicle and the operation conditions (i.e., vehicle type, the roads, surrounding environment, the vehicle speeds, pay load, etc.) be closely examined. Consideration should be made regarding the manner in which the tyre is to be utilized and maintained by the user so that a tyre which is safe and easy to utilize may be selected.

Table below shows tyre types by their characteristics. It is important to select the best tyre for a particular set of usage conditions.

Tyre Type	Pneumatic Tyre		Trukush
	Bias	Radial	
Riding comfort	●	●	○
Puncture resistance	○	●	Puncture proof
Fuel economy	◎	●	○

● Excellent ◎ Very good ○ Normal

ROAD SURFACE MAINTENANCE

Pneumatic tyres can be punctured by scraps of metal and glass.

While Trukush, Rubber Solid and Urethane Filled tyres are puncture-free, the entry of such foreign objects into the tyre shortens tyre life. Oily surfaces should be avoided because oil deteriorates the quality of the rubber of the tyres and shortens their life.

TRUKUSH TYRES AND TYRE RIMS

When tyres are mounted onto their wheels, the bolts securing the two sides of the wheel should be tightened until wheel faces meet.




RIMS

RIM CLASSIFICATION

Code	Type
DT	Divided type rim
SDC	Semi drop center rim (ring type)
IR	Interim rim (ring type)
TB	Full tapered bead seat rim (ring type)
DC	Drop center rim (one-piece type)


RIM MARKINGS

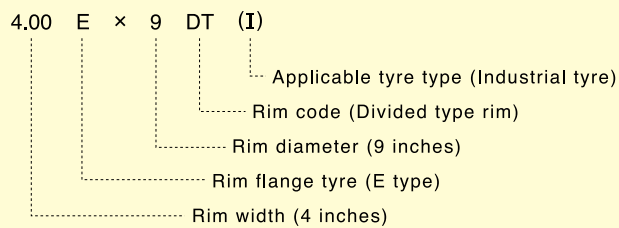

Note: Rim flange codes include GS, T, R, etc. Some tyres bear no rim flange codes.

RIM NOMENCLATURE BY CLASSIFICATION

1 Divided type rim (DT)

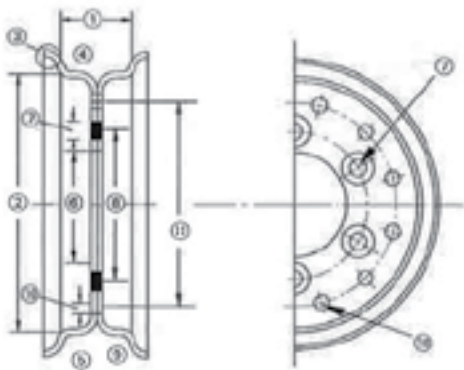


No.	Name
1	Rim width
2	Rim diameter
3	Rim flange
4	Valve hole
5	Bead seat
6	Hub hole diameter
7	Hub bolt hole
8	Hub bolt hole pitch circle diameter
9	Offset
10	Rim bolt hole
11	Rim bolt hole pitch circle diameter

SAFETY INFORMATION FOR INDUSTRIAL TYRES

RIMS



RIM NOMENCLATURE BY CLASSIFICATION

2 Drop center rim (DC)

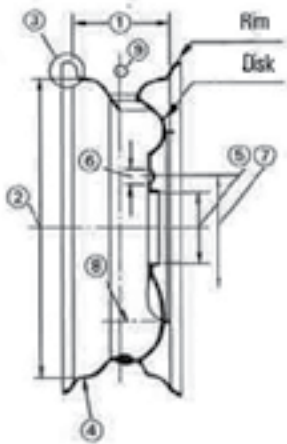


No.	Name
1	Rim width
2	Rim diameter
3	Rim flange
4	Bead seat
5	Hub hole diameter
6	Bolt hole diameter
7	Nut seat pitch circle diameter
8	Offset
9	Valve hole

3 Semi drop center rim

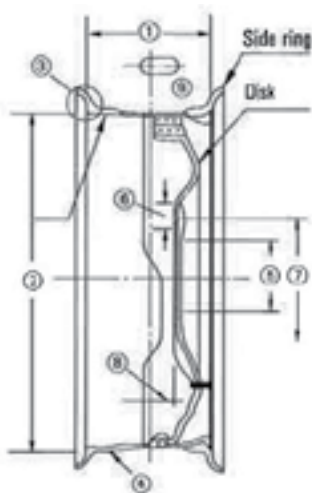

No.	Name
1	Rim width
2	Rim diameter
3	Rim flange
4	Bead seat
5	Hub hole diameter
6	Bolt hole diameter
7	Nut seat pitch circle diameter
8	Offset
9	Valve hole

4 Full tapered bead seat & interim rim

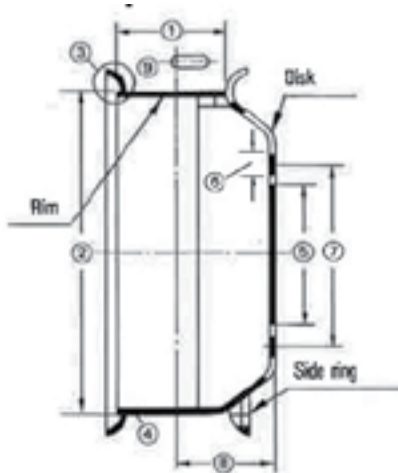

No.	Name
1	Rim width
2	Rim diameter
3	Rim flange
4	Bead seat
5	Hub hole diameter
6	Bolt hole diameter
7	Nut seat pitch circle diameter
8	Offset
9	Valve hole

CAUTIONS REGARDING THE RIM

Caution must be paid to the following items in rim selection and handling.

- Pneumatic tyres are inflated to very high air pressures.
When the tyre is mounted on a divided type rim, always release the air pressure before attempting to loosen the rim bolts.
- When reusing a rim, always inspect it for deformation, loosening of the side ring and for cracking before remounting.
- Although pneumatic and trukush tyres are of the same sizes, caution is required in mounting as their rims are not necessarily interchangeable, as shown below.

Tyre size	Applicable rim		Tyre size	Applicable rim	
	Pneumatic tyre	Trukush tyre		Pneumatic tyre	Trukush tyre
5.00-8	3.00 D x 8 DT, TB 3.50 D x 8 DT	3.00 D x 8 DT, TB 4.5mm	9.00-20	7.00 T x 20 IR 7.50 V x 20 IR	7.00 T x 20 IR
5.00-9	3.00 D x 9 DT 3.50 D x 9 DT	3.50 D x 9 DT	10.00-20	7.00 T x 20 7.50 V x 20	7.00 T x 20 IR
4.50-12	3.00 D x 12 DT, DC 3.50 D x 12 DT, DC	3.00 D x 12 DT, SDC	250-15	7.00 T x 15 IR 7.50 V x 15 IR	7.00 T x 15 IR
8.25-20	6.00 S x 20 IR 6.50 T x 20 IR 7.00 T x 20 IR	8.25-20/6.00 for 6.00 S x 20 IR 8.25-20/6.50 for 6.50 T x 20 IR 8.25-20/7.00 for 7.00 T x 20 IR			

RIMS FOR 7.00-15 AND 7.50-15 INDUSTRIAL


There are two types of rims for these sizes: SDC & IR.

Please note that, although they are both 15" rims, the bead-seat diameter of the IR rim is 4.5mm greater, and the tyres designed for SDC rims are not interchangeable with those designed for IR rims.

a) Identification

To identify the two types of tyres, the Japanese Industrial Standards requires the rim type the tyre is designed for to be clearly shown in the tyre size designation like 7.00-15 10 PR (SDC). The same is also engraved on the tyre sidewall as shown below:

Sidewall marking	
SDC rim tyre	RIM SDC
IR rim tyre	RIM IR



b) Cautions

- Always check to ensure that the rim to be used is the proper one for the tyre.
- The bead of a tyre for SDC rim will not fit on an IR rim as its bead diameter is too small. Do not attempt to fit one to the other.
- A tyre for an IR rim may be placed onto an SDC rim, but the bead will sit too loosely on the rim for safe operation.

c) Tyre and rim matching guide

Tyre size \ Rim	SDC	IR
7.00-15 10 PR	EF158	TKM MK-II
7.00-15 12 PR	—	TKM MK-II
7.50-15 12 PR	TKM MK-II	PL
7.50-15 14 PR	—	PL
7.00-15 12 PR MS	—	PL PSK

CORPORATE DATA

GUIDE TO PROVING GROUNDS

Sumitomo Rubber's tyre proving grounds in Okayama, Nayoro and Asahikawa support tyre development through severe tests conducted in many kinds of roads of the world and in various driving conditions.

OKAYAMA

This facility merges the Roads of the World.

Sumitomo Rubber's Okayama Proving Ground reproduces the world's roads and a wide variety of driving conditions. The expansive site, with a total area of 1,000,000 square metres, is fully equipped with a 3,200metre main circuit, a handling & stability test track, wet roads, a noise and vibration test track, and tyre noise evaluation devices, among many others. To provide drivers around the world with greater safety and comfort, the site plays an invaluable role in the research and development of high-performance tyres that boast superior handling and refined comfort, and next generation tyres including run-flat tyres, electric car tyres and ultra-lightweight tyres.



ASAHIKAWA High Quality winter tyres are born here - Sumitomo Rubber Asahikawa Proving Ground

Asahikawa Proving Ground, specially designed for winter testing, is located in the city of Asahikawa in Hokkaido and boasts a total area of 210,000 square metres. The facility includes a 1,400metre main circuit and a variety of ice and packed snow surfaces, making it an important base of research and development for winter tyres.




NAYORO Winter Tyre Special Evaluation Center - Sumitomo Rubber Nayoro Proving Ground

Nayoro Proving Ground, specially designed for winter testing, is located in the city of Nayoro in Hokkaido, and boasts a total area of 870,000 square metres. The facility includes a 2,200metre main circuit, and variety of ice and packed snow surfaces, making this an important base of research and development for winter tyres.



OVERSEAS OFFICES

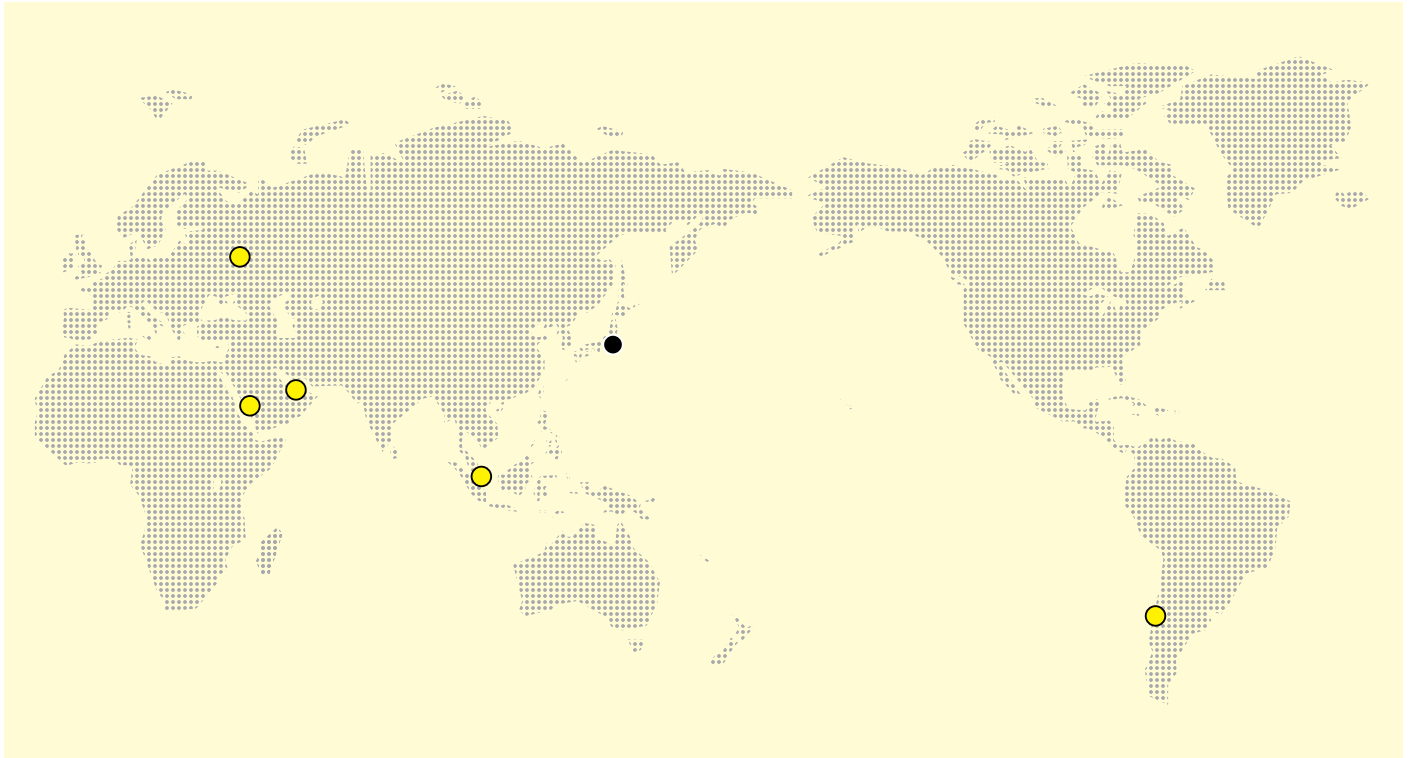

Sumitomo Rubber Middle East FZE.

Office No.5WA 118,
Dubai Airport Free Zone
P. O. Box 54901, Dubai, UAE
TEL: 04-2146959 FAX: 04-2146960

Sumitomo Rubber Middle East Jeddah branch c/o BINZAGR COMPANY

P. O. Box 54, Jeddah 21411 Saudi Arabia
TEL: +966-2-663-7327 FAX: +966-2-663-5522

Dunlop Tire CIS LLC

S. Ivana Franko str., 121108, Moscow,
Russian Federation
TEL: +7-495-663-2360 FAX: +7-495-663-2460

Sumitomo Rubber Asia (Tyre) PTE. LTD.

1 Maritime Square #09-58 Harbourfront Centre Singapore
099253, Singapore
TEL: +65-6278-6975 FAX: +65-6278-4049

Sumitomo Rubber Latin America Limitada

Av. El Bosque Norte N° 0123, Of. 902,
Las Condes, Santiago, Chile
TEL: +56-2-244-5190, FAX: 56-2-244-1815

 **DUNLOP**

PASSENGER CAR TYRES



DUNLOP TYRE POSITIONING MAP

for PASSENGER CARS





PASSENGER CAR TYRES LINE-UP

30/35/40/45 Series

SERIES	SIZE	LI		FLAGSHIP		PREMIUM	SPORT		COMFORT	
		St'd	Reinf	050+	MAXX	VE303	ZIII	DZ102	LM704	FM800
30	285/30R18	93	97				93W			
	295/30R18	94	98				94W			
	245/30R19	-	89							
	265/30R19	89	93		ZR ZR 93Y					
	275/30R19	92	96	ZR 96Y		96W		93W 96W		
	285/30R19	94	98							
	295/30R19	96	100							
	235/30R20	-	88							
	275/30R20	93	97	ZR 97Y						
	285/30R20	95	99							
35	215/35R17	79	83							
	215/35R18	80	84					84W		
	255/35R18	90	94	ZR 94Y		94W	90W	94W		
	265/35R18	93	97	ZR 97Y		97W	93W	97W		
	275/35R18	95	99			99W	95W	95W		
	215/35R19	-	85							
	225/35R19	84	88					88W		
	235/35R19	87	91					91W		
	245/35R19	89	93	ZR 93Y	ZR 93Y	93W		93W		
	255/35R19	92	96	ZR 96Y						
	265/35R19	94	98							
	275/35R19	96	100	ZR 100Y	ZR 100Y	100W	96W			
	245/35R20	91	95	ZR 95Y	ZR 95Y	95W		ZR 95W		
	255/35R20	93	97	ZR 97Y	ZR 97Y			97W		
275/35R20	98	102	ZR 102Y		102W		102W			
265/35R22	98	102					ZR 102W			
40	205/40R16	-	83							
	205/40R17	80	84					84W	ZR 84W	
	215/40R17	83	87				83W	87W		
	235/40R17	90	94	ZR 94Y	ZR 94Y		90W			
	245/40R17	91	95			95W	91W	91W		
	255/40R17	94	98	ZR 98Y	ZR 98Y	98W	94W	94W		
	265/40R17	96	100							
	215/40R18	85	89							
	225/40R18	88	92	ZR 92Y	ZR 92Y	92W	88W	92W	ZR 92W	92W
	235/40R18	91	95	ZR 95Y	ZR 91Y	95W	91W	95W	ZR 95W	
	245/40R18	93	97	ZR 97Y	ZR 93Y	97W	93W	97W	ZR 97W	97W
	255/40R18	95	99			99W				
	275/40R18	99	103	ZR 103Y		103W		99W		
	225/40R19	89	93			93W				
	245/40R19	94	98	ZR 98Y	ZR 98Y	98W	94W	ZR 94W		
	255/40R19	96	100	ZR 100Y						
	275/40R19	101	105	ZR 105Y	ZR 101Y					
245/40R20	95	99			99W		ZR 99W			
275/40R20	102	106								
45	195/45R16	80	84				80W	84W	ZR 84W	84V
	205/45R16	83	87				83W	87W	ZR 83W	
	215/45R16	86	90							86V
	225/45R16	89	93				89W			
	205/45R17	84	88	ZR 88W	ZR 88W		84W	88W	ZR 88W	88W
	215/45R17	87	91	ZR 91Y	ZR 91Y	91W	87W	91W	91W,ZR 91W,ZR 87W	91W
	225/45R17	91	94	ZR 94Y	ZR 94Y	94W	91W	94W	ZR 94W	94W
	235/45R17	94	97	ZR 97Y	ZR 97Y	97W	94W	94W	ZR 94W	94W
	245/45R17	95	99	ZR 99Y	ZR 95Y	99W		95W	95W	95W
	205/45R18	86	90	ZR 90W	ZR 90W					
	215/45R18	89	93			93W				
	225/45R18	91	95	ZR 95Y		95W	91W	95W	95W,ZR 95W	
	235/45R18	94	98	98Y		98W			94W	
	245/45R18	96	100	ZR 100Y	ZR 96Y	100W		100W	100W	100W
	255/45R18	99	103	ZR 103Y	ZR 99Y	103W		ZR 99W	98W	
	225/45R19					96W				
	245/45R19	98	102	ZR 102Y	ZR 98Y	102W				
	275/45R19	104	108							

50/55/60/65/70/80 Series

SERIES	SIZE	LI		FLAGSHIP		PREMIUM	SPORT		COMFORT		STANDARD		ECO			
		St'd	Reinf	050+	MAXX	VE303	ZIII	DZ102	LM704	FM800	SP TOURING T1	SP TOURING R1	EC300+	EC503		
50	175/50R13	-	-						72H							
	215/50R13	-	-						84H							
	165/50R15	72	76					73V								
	175/50R15	75	-							75H	75H	75H				
	195/50R15	82	86		ZR 82W			82V	82V	82V	82V	82H				
	205/50R15	86	89					86V	86V	86V						
	165/50R16							75V								
	195/50R16	84	88		84V			84V	84V	84V	84V	84H	84H			
	205/50R16	87	91	ZR 87W	ZR 87Y			87V	87V	87V						
	215/50R16	90	94					90V								
	225/50R16	92	96	ZR 96W				92V								
	205/50R17	89	93	ZR 93Y					ZR 93W	89V	93W					
	215/50R17	91	95	ZR 95W	91V	91V			91V	91V	91W					
	225/50R17	94	98	ZR 98Y		94W			94W	94V,98V	94W			94V		
	235/50R17	96	100			96V			ZR 96W							
235/50R18	97	101	ZR 101W		97W			ZR 97W								
245/50R18	100	104	ZR 100W	ZR 100Y	100W				97V,W	100W						
55	165/55R14							72V								
	185/55R14	80	-							80H						
	165/55R15	75	-					75V								
	185/55R15	82	86						82V	86V	82H	82H				
	195/55R15	85	89					85V	85V	85V	85H	85H				
	205/55R15	88	-						88V							
	185/55R16	83	87						83V	83V	83H	83H	83V			
	195/55R16	87	91						87V	87V						
	205/55R16	91	94	ZR 94W	ZR 91W	91V	91V	91V	91V	91V	91H	91H				
	215/55R16	93	97	ZR 97Y	ZR 93Y	93V		93V	93V	93V, 97W	93H	93H				
	225/55R16	95	99			95V		95V	95V	95V						
	205/55R17	91	95							91V						
	215/55R17	94	98	ZR 94Y		94V, 94W		94V	94V	94W			94V			
	225/55R17	97	101	ZR 101Y		97W			97V,101W	101W						
	235/55R17	99	103	ZR 103Y				ZR 99W	99V							
215/55R18	95	99								95H						
225/55R18	98	102			98V					98H						
235/55R18	100	104						100V								
60	165/60R13	73	-													
	185/60R13	80	-						80H	80H						
	195/60R13	83	-						83H							
	205/60R13	86	-						86H							
	165/60R14	75	79						75H		75T	75T				
	175/60R14	79	83					79H								
	185/60R14	82	86					82H	82H	82H	82H	82T,H	82T,H			
	195/60R14	86	-						86H		86H	86H	86H			
	175/60R15	81	-						81H	81H	81T	81S	81H			
	185/60R15	84	88						84H,88H	84H, 88H	84H	84T,H	84T,H			
	195/60R15	88	92						88H	88H,V	88H,V	88H	88H			
	205/60R15	91	95						91H	91V	91H	91H	91T			
	215/60R15	94	-						94H							
	185/60R16												86T			
	195/60R16	89	93							89V	89H	89H	89H			
	205/60R16	92	96			92H			92H	92H	92H	92H	92H	92H		
	215/60R16	95	99			95V			95H,V	99H	95H	95H	95H			
	225/60R16	98	102			98V			98H,V		98H					
235/60R16	100	104		ZR 100W	100W											
215/60R17	96	100						96H								
225/60R17	99	103						99H								
225/60R18	100	104						100V	100H							
65	155/65R13	73	-						73H							
	165/65R13	77	-								77T	77T				
	155/65R14										75T	75T				
	165/65R14	79	83								79T	79T				
	175/65R14	82	86						82H	82H	82T,H	82T,H				
	185/65R14	86	90						86H	86H	86T,H	86T,H				
	195/65R14	89	93						89H		89T	89T				
	205/65R14	91	-								91T					
	175/65R15	84	88							84H	84T	84H	84H	84H		
	185/65R15	88	92						88H	88H	88T,H	88T,H				
	195/65R15	91	95			91H			91H,V	91H,V	91T,H	91T,H				
	205/65R15	94	99			94H			99H,94V,H	94H	94T,H	94H	94H			
	215/65R15	96	100						96H		96T	96H				
	205/65R16	95	99			95V			95H	95H						
	215/65R16	98	102						98H	98H			98H	98H		
225/65R17	102	106							102V							
70	145/70R12	69	-								69T					
	155/70R12	73	-								73T	73T				
	165/70R12	77	-								77T					
	175/70R12	80	-								80T	80S				
	155/70R13	75	-								75T	75T				
	165/70R13	79	83								79T	79T				
	175/70R13	82	86							82H	82T,H	82T	82T			
	185/70R13	86	-						86H		86T	86S				
	165/70R14												81T,H			
	175/70R14	84	88						84H		84T	84T	84T			
	185/70R14	88	92						88H		88T,H	88T,H	88T,H			
	195/70R14	91	95						91H		91T,H	91H	91H			
	205/70R14	-	98						94H		98T					
	205/70R15	96	100						96H		96T,H	96H	96H	96H	96H	
	215/70R15	98	-						98H		98T,H	98H				
80	145/80R12	74	-								74S					
	155/80R12	77	-													
	155/80R13	79	83								79S					
	165/80R13	83	87								83S	83S				
	185/80R14	91	95								91S	91S				

PASSENGER CAR TYRES



PASSENGER CAR TYRES LINE-UP

Studless / Winter Tyres

SERIES	SIZE	LI		STUDLESS		STUDDABEL TYRE	
		St'd	Reinf	WINTER MAXX WM01	WINTER MAXX WM02	WINTER ICE02	
35	255/35R18	90	94				
	265/35R19	94	98				
	255/35R20	93	97			97T	
	275/35R20	98	102			102T	
40	225/40R18	88	92	92T	92T	92T	
	245/40R18	93	97	97T	97T	97T	
	235/40R19	92	96				
	245/40R19	94	98	RF94T			
	255/40R19	96	100			100T	
	275/40R19	101	105	101T		105T	
	245/40R20	95	99			99T	
45	215/45R17	89	91	91T	91T		
	225/45R17	91	94	94T	94T	94T	
	235/45R17	94	97	97T	97T	97T	
	245/45R17	95	99	99T		99T	
	215/45R18	89	93	93T			
	225/45R18	91	95	95T	95T	95T	
	235/45R18	94	98		94T		
	245/45R18	96	100	100T	100T	100T	
	255/45R18	99	103	103T		103T	
	245/45R19	98	102	98T	98T	102T	
50	195/50R15	82	86	82T		82T	
	205/50R16	87	91				
	205/50R17	89	93	93T	93T	93T	
	215/50R17	91	95	95T	95T	95T	
	225/50R17	94	98	98T	98T	98T	
	235/50R18	97	101	101T	101T	101T	
	245/50R18	100	104			104T	
	185/55R15	82	86	82T	82T	86T	
55	195/55R15	85	89	85T		89T	
	185/55R16	83	87	83T			
	195/55R16	87	91	91T	91T	91T	
	205/55R16	91	94	94T	94T	94T	
	215/55R16	93	97	97T	97T	97T	
	225/55R16	95	99	99T		99T	
	215/55R17	94	98	94T	94T	98T	
	225/55R17	97	101	101T	101T	101T	
	235/55R17	99	103			103T	
	225/55R18	98	-	98T	98T		
	235/55R18	100	104				
	255/55R18	105	109				
	60	185/60R14	82	86	82T	82T	82T
		185/60R15	84	88	84T	84T	88T
195/60R15		88	92	88T		92T	
205/60R15		91	95				
175/60R16		82	86				
185/60R16		86	-				
205/60R16		92	96	96T	96T	96T	
215/60R16		95	99	99T	99T	99T	
225/60R16		98	102	102T			
235/60R16		100	104				
215/60R17		96	100	96T	96T		
255/60R17		106	110		99T		
225/60R18		100	104				
265/60R18	110	114					
285/60R18	116	120					
65	155/65R14	75	79	75T	75T	75T	
	165/65R14						
	175/65R14	82	86	82T	82T	82T	
	185/65R14	86	90	86T	86T	90T	
	175/65R15	84	88	84T	84T	88T	
	185/65R15	88	92	88T	88T	92T	
	195/65R15	91	95	91T	91T	95T	
	205/65R15	94	99	94T	94T	94T	
	215/65R15	96	100				
	205/65R16	95	99	95T	95T		
	215/65R16	98	102	98T	98T		
	225/65R17	102	106				
	235/65R17	104	108				
	265/65R17	112	116				
	275/65R17	115	119				
	285/65R17	116	-				
70	155/70R13	75	-	75T		75T	
	175/70R13	82	86	82T	82T	82T	
	175/70R14	84	88	84T	84T	84T	
	185/70R14	88	92	88T	88T	92T	
	195/70R14	91	95				
	205/70R15	96	100	96T			
	215/70R15	98	-	98T		98T	
	215/70R16	100	-				
	225/70R16	103	107				
	245/70R16	107	111				
	265/70R16	112	-				
	275/70R16	114	-				

PASSENGER CAR TYRES



FLAGSHIP

SP SPORT MAXX 050+

STEEL BELTED RADIAL

SP SPORT MAXX 050+ is Dunlop's flagship tyre with enhance high speed stability and cornering performance.

Pattern design and compound enhance performance on Dry & Wet road surfaces.



**SP SPORT
MAXX 050+**

Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
275/30ZR19	96	Y	○	BLK	TL	○	○	649	278	9.50	9.00 - 10.00	7.9
275/30ZR20	97	Y	○	BLK	TL	○	○	674	278	9.50	9.00 - 10.00	7.9
255/35ZR18	94	Y	○	BLK	TL	○	○	635	260	9.00	8.50 - 10.00	8.1
265/35ZR18	97	Y	○	BLK	TL	○	○	643	271	9.50	9.00 - 10.50	7.9
245/35ZR19	93	Y	○	BLK	TL	○	○	655	248	8.50	8.00 - 9.50	8.1
255/35ZR19	96	Y	○	BLK	TL	○	○	661	260	9.00	8.50 - 10.00	8.1
275/35ZR19	100	Y	○	BLK	TL	○	○	675	278	9.50	9.00 - 11.00	7.9
245/35ZR20	95	Y	○	BLK	TL	○	○	680	248	8.50	8.00 - 9.50	8.1
255/35ZR20	97	Y	○	BLK	TL	○	○	686	260	9.00	8.50 - 10.00	8.1
275/35ZR20	102	Y	○	BLK	TL	○	○	700	278	9.50	9.00 - 11.00	7.9
235/40ZR17	94	Y	○	BLK	TL	○	○	620	241	8.50	8.00 - 9.50	8.1
255/40ZR17	98	Y	○	BLK	TL	○	○	636	260	9.00	8.50 - 10.00	8.1
225/40ZR18	92	Y	○	BLK	TL	○	○	637	230	8.00	7.50 - 9.00	8.1
235/40ZR18	95	Y	○	BLK	TL	○	○	645	241	8.50	8.00 - 9.50	8.1
245/40ZR18	97	Y	○	BLK	TL	○	○	653	248	8.50	8.00 - 9.50	8.1
275/40ZR18	103	Y	○	BLK	TL	○	○	677	278	9.50	9.00 - 11.00	7.9
245/40ZR19	98	Y	○	BLK	TL	○	○	679	248	8.50	8.00 - 9.50	8.1
255/40ZR19	100	Y	○	BLK	TL	○	○	687	260	9.00	8.50 - 10.00	8.1
275/40ZR19	105	Y	○	BLK	TL	○	○	703	278	9.50	9.00 - 11.00	7.9
205/45ZR17	88	W	○	BLK	TL	○	○	616	206	7.00	6.50 - 7.50	8.1
215/45ZR17	91	Y	○	BLK	TL	○	○	626	213	7.00	7.00 - 8.00	8.1
225/45ZR17	94	Y	○	BLK	TL	○	○	634	225	7.50	7.00 - 8.50	8.1
235/45ZR17	97	Y	○	BLK	TL	○	○	644	236	8.00	7.50 - 9.00	8.1
245/45ZR17	99	Y	○	BLK	TL	○	○	652	243	8.00	7.50 - 9.00	8.1
205/45ZR18	90	W	○	BLK	TL	○	○	641	206	7.00	6.50 - 7.50	8.1
225/45ZR18	95	Y	○	BLK	TL	○	○	659	225	7.50	7.00 - 8.50	8.1
235/45ZR18	98	Y	○	BLK	TL	○	○	669	236	8.00	7.50 - 9.00	8.1
245/45ZR18	100	Y	○	BLK	TL	○	○	677	243	8.00	7.50 - 9.00	8.1
255/45ZR18	103	Y	○	BLK	TL	○	○	687	255	8.50	8.00 - 9.50	8.1
245/45ZR19	102	Y	○	BLK	TL	○	○	703	243	8.00	7.50 - 9.00	8.1
205/50ZR16	87	W	○	BLK	TL	○	○	612	214	6.50	5.50 - 7.50	8.1
225/50ZR16	96	W	○	BLK	TL	○	○	632	233	7.00	6.00 - 8.00	8.1
205/50ZR17	93	Y	○	BLK	TL	○	○	638	214	6.50	5.50 - 7.50	8.1
215/50ZR17	95	W	○	BLK	TL	○	○	648	226	7.00	6.00 - 7.50	8.1
225/50ZR17	98	Y	○	BLK	TL	○	○	658	233	7.00	6.00 - 8.00	8.1
235/50ZR18	101	W	○	BLK	TL	○	○	693	245	7.50	6.50 - 8.50	8.1
245/50ZR18	100	W	○	BLK	TL	○	○	703	253	7.50	7.00 - 8.50	8.1
205/55ZR16	94	W	○	BLK	TL	○	○	632	214	6.50	5.50 - 7.50	8.1
215/55ZR16	97	Y	○	BLK	TL	○	○	642	226	7.00	6.00 - 7.50	8.1
215/55ZR17	94	Y	○	BLK	TL	○	○	668	226	7.00	6.00 - 7.50	8.1
225/55ZR17	101	Y	○	BLK	TL	○	○	680	233	7.00	6.00 - 8.00	8.1
235/55ZR17	103	Y	○	BLK	TL	○	○	690	245	7.50	6.50 - 8.50	8.1



SP SPORT MAXX



**SP SPORT
MAXX**

STEEL BELTED RADIAL

SP SPORT MAXX is an innovation under the combined technology of Dunlop's global network in Japan and Germany. It demonstrates harmonized dry, wet performance at high level, yet conveys quiet, and comfortable ride.

Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
245/30ZR19			○	BLK	TL	○		632	245	8.50	8.00 - 9.00	8.1
265/30ZR19	93	Y	○	BLK	TL	○	○	644	265	9.50	9.00 - 10.00	7.9
245/35ZR19	93	Y	○	BLK	TL	○	○	656	246	8.50	8.00 - 9.50	8.1
275/35ZR19	100	Y	○	BLK	TL	○	○	676	270	9.50	9.00 - 11.00	7.9
245/35ZR20	95	Y	○	BLK	TL	○	○	680	244	8.50	8.00 - 9.50	8.1
255/35ZR20	97	Y	○	BLK	TL	○	○	685	254	9.00	8.50 - 10.00	8.1
235/40ZR17	94	Y	○	BLK	TL	○	○	622	241	8.50	8.00 - 9.50	8.1
255/40ZR17	98	Y	○	BLK	TL	○	○	635	262	9.00	8.50 - 10.00	8.1
225/40ZR18	92	Y	○	BLK	TL	○	○	637	231	8.00	7.50 - 9.00	8.1
235/40ZR18	91	Y		BLK	TL	○	○	641	242	8.50	8.00 - 9.50	8.1
245/40ZR18	93	Y		BLK	TL	○	○	652	242	8.50	8.00 - 9.50	8.1
245/40ZR19	98	Y	○	BLK	TL	○	○	677	247	8.50	8.00 - 9.50	8.0
275/40ZR19	101	Y		BLK	TL	○	○	702	276	9.50	9.00 - 11.00	7.9
205/45ZR17	88	W	○	BLK	TL	○	○	620	208	7.00	6.50 - 7.50	8.1
215/45ZR17	91	Y	○	BLK	TL	○	○	625	213	7.00	7.00 - 8.00	8.1
225/45ZR17	94	Y	○	BLK	TL	○	○	636	225	7.50	7.00 - 8.50	8.1
235/45ZR17	97	Y	○	BLK	TL	○	○	645	237	8.00	7.50 - 9.00	8.1
245/45ZR17	95	Y		BLK	TL	○	○	651	241	8.00	7.50 - 9.00	7.9
205/45ZR18	90	W	○	BLK	TL	○	○	645	208	7.00	6.50 - 7.50	8.1
245/45ZR18	96	Y		BLK	TL	○	○	678	245	8.00	7.50 - 9.00	8.1
255/45ZR18	99	Y		BLK	TL	○	○	684	259	8.50	8.00 - 9.50	8.1
245/45ZR19	98	Y		BLK	TL	○	○	701	246	8.00	7.50 - 9.00	8.1
195/50ZR15	82	W		BLK	TL	○	○	575	196	6.00	5.50 - 7.00	8.1
195/50R16	84	V		BLK	TL	○	○	603	201	6.00	5.50 - 7.00	7.9
205/50ZR16	87	Y		BLK	TL	○	○	611	209	6.50	5.50 - 7.50	8.1
215/50R17	91	V		BLK	TL			648	226	7.00	6.00 - 7.50	8.0
245/50ZR18	100	Y		BLK	TL	○	○	700	249	7.50	7.00 - 8.50	8.1
205/55ZR16	91	W		BLK	TL	○	○	630	216	6.50	5.50 - 7.50	8.1
215/55ZR16	93	Y		BLK	TL	○	○	643	231	7.00	6.00 - 7.50	8.1
235/60ZR16	100	W		BLK	TL		○	687	240	7.00	6.50 - 8.50	8.1



PREMIUM

VEURO VE303

STEEL BELTED RADIAL

Premium comfort tyre "VEURO VE303" combines excellent quietness with high handling stability.



VEURO
VE303

Tyre Size	Load Index	Speed Symbol	XL or RF		TL or TT	MFS	E-No.	Overall Diam. (mm)	Section Width (mm)	Rim Width (code)		Tread Depth (mm)
										Measuring	Approved	
275/30R19	96	W	○	BLK	TL	○		648	279	9.50	9.00 - 10.00	8.0
255/35R18	94	W	○	BLK	TL	○		635	260	9.00	8.50 - 10.00	8.0
265/35R18	97	W	○	BLK	TL	○		640	269	9.50	9.00 - 10.50	8.0
275/35R18	99	W	○	BLK	TL	○		646	269	9.50	9.00 - 11.00	8.0
245/35R19	93	W	○	BLK	TL	○		652	244	8.50	8.00 - 9.50	8.0
275/35R19	100	W	○	BLK	TL	○		675	278	9.50	9.00 - 11.00	8.0
245/35R20	95	W	○	BLK	TL	○		680	248	8.50	8.00 - 9.50	8.0
275/35R20	102	W	○	BLK	TL	○		700	278	9.50	9.00 - 11.00	8.0
245/40R17	95	W	○	BLK	TL	○		626	245	8.50	8.00 - 9.50	8.0
255/40R17	98	W	○	BLK	TL	○		636	260	9.00	8.50 - 10.00	8.0
225/40R18	92	W	○	BLK	TL	○	○	637	230	8.00	7.50 - 9.00	8.0
235/40R18	95	W	○	BLK	TL	○	○	642	241	8.50	8.00 - 9.50	8.0
245/40R18	97	W	○	BLK	TL	○	○	651	244	8.50	8.00 - 9.50	8.0
255/40R18	99	W	○	BLK	TL	○		661	260	9.00	8.50 - 10.00	8.0
275/40R18	103	W	○	BLK	TL	○		677	278	9.50	9.00 - 11.00	8.0
225/40R19	93	W	○	BLK	TL	○		663	230	8.00	7.50 - 9.00	8.0
245/40R19	98	W	○	BLK	TL	○	○	677	244	8.50	8.00 - 9.50	8.0
245/40R20	99	W	○	BLK	TL	○		704	242	8.50	8.00 - 9.50	8.0
215/45R17	91	W	○	BLK	TL	○	○	624	209	7.00	7.00 - 8.00	8.0
225/45R17	94	W	○	BLK	TL	○	○	632	220	7.50	7.00 - 8.50	8.0
235/45R17	97	W	○	BLK	TL	○	○	641	235	8.00	7.50 - 9.00	8.0
245/45R17	99	W	○	BLK	TL	○	○	649	243	8.00	7.50 - 9.00	8.0
215/45R18	93	W	○	BLK	TL	○		648	209	7.00	7.00 - 8.00	8.0
225/45R18	95	W	○	BLK	TL	○	○	658	222	7.50	7.00 - 8.50	8.0
235/45R18	98	W	○	BLK	TL	○		666	235	8.00	7.50 - 9.00	8.0
245/45R18	100	W	○	BLK	TL	○	○	674	241	8.00	7.50 - 9.00	8.0
255/45R18	103	W	○	BLK	TL	○	○	684	254	8.50	8.00 - 9.50	8.0
225/45R19	96	W	○	BLK	TL	○		682	221	7.50	7.00 - 8.50	8.0
245/45R19	102	W	○	BLK	TL	○	○	701	241	8.00	7.50 - 9.00	8.0
215/50R17	91	V		BLK	TL	○		646	222	7.00	6.00 - 7.50	8.0
225/50R17	94	W		BLK	TL	○	○	657	228	7.00	6.00 - 8.00	8.0
235/50R17	96	V		BLK	TL	○		666	241	7.50	6.50 - 8.50	8.0
235/50R18	97	W		BLK	TL	○	○	690	241	7.50	6.50 - 8.50	8.0
245/50R18	100	W		BLK	TL	○	○	701	250	7.50	7.00 - 8.50	8.0
205/55R16	91	V		BLK	TL	○	○	628	214	6.50	5.50 - 7.50	8.0
215/55R16	93	V		BLK	TL	○		638	226	7.00	6.00 - 7.50	8.0
225/55R16	95	V		BLK	TL	○		650	231	7.00	6.00 - 8.00	8.0
215/55R17	94	V		BLK	TL	○		665	225	7.00	6.00 - 7.50	8.0
215/55R17	94	W		BLK	TL	○	○	665	225	7.00	6.00 - 7.50	8.0
225/55R17	97	W		BLK	TL	○	○	677	231	7.00	6.00 - 8.00	8.0
225/55R18	98	V		BLK	TL	○		702	233	7.00	6.00 - 8.00	8.0
205/60R16	92	H		BLK	TL			648	208	6.00	5.50 - 7.50	8.4
215/60R16	95	V		BLK	TL		○	660	222	6.50	6.00 - 7.50	8.4
225/60R16	98	V		BLK	TL		○	671	230	6.50	6.00 - 8.00	8.4
235/60R16	100	W		BLK	TL		○	684	239	7.00	6.50 - 8.50	8.0
195/65R15	91	H		BLK	TL			634	202	6.00	5.50 - 7.00	8.3
205/65R15	94	H		BLK	TL			646	209	6.00	5.50 - 7.50	8.4
205/65R16	95	V		BLK	TL		○	669	212	6.00	5.50 - 7.50	8.4



 **SUMITOMO RUBBER INDUSTRIES, LTD.**

Toyosu Center Building, 3-3, 3-chome,
Toyosu, Koto-ku, Tokyo 135-6005, Japan
TEL:+81-3-5546-0126 FAX:+81-3-5546-0146